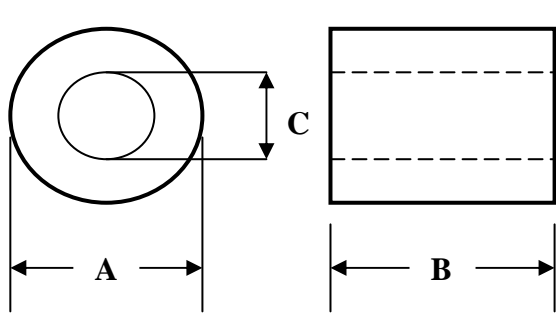


SPECIFICATION FOR APPROVAL

CUSTOMER :				DATE :		
PART NO : RH-17.5×28.5×9.5 (B8)				DWG.NO : BF3265147B29		
CUSTOMER PART NO :				CUST.DWG.NO :		
(1) DIMENSION (UNIT: mm) 				A	17.5 ± 0.5	m/m
				B	28.5 ± 0.7	m/m
				C	9.5 ± 0.3	m/m
				D		m/m
				E		m/m
				F		m/m
				G		m/m
				H		m/m
				I		m/m
				J		m/m
				(2) ELECTRICAL REQUIREMENTS		
Z	MIN 100 OHM	TEST FREQ	25	MHz		
Z	MIN 180 OHM	TEST FREQ	100	MHz		
Z	MIN OHM	TEST FREQ		MHz		
Z	MIN OHM	TEST FREQ		MHz		
TEST INSTRUMENTS						
HP-4191A						
MATERIAL (ui)	800 ± 25%			APPROVED BY 吳載敏		
CORE	RH-17.5×28.5×9.5					
WIRE	2UEW φ 0.6 × 120mm			CHECKED BY 張明德		
WINDING	1 Ts			DRAWN BY 黃慧診		

CORE MASTER ENTERPRISE CO., LTD.

TEL: 886-2-8919-1288 FAX: 886-2-8919-1298 WEB: www.coremaster.com.tw

TEST DATA

CUSTOMER :				DATE :					
PART NO : RH-17.5×28.5×9.5 (B8)				DWG.NO : BF3265147B29					
CUSTOMER PART NO :				CUST.DWG.NO :					
IMPEDANCE				DIMENSION (UNIT : mm)					
FREQ	25 MHz	100 MHz		A	B	C			
SPEC	MIN 100 OHM	MIN 180 OHM		17.5 ± 0.5	28.5 ± 0.7	9.5 ± 0.3			
1	121.7	218.0		17.47	28.17	9.45			
2	123.5	218.0		17.36	28.21	9.47			
3	123.0	219.0		17.44	28.25	9.48			
4	122.9	217.0		17.39	28.15	9.46			
5	123.8	219.0		17.42	28.17	9.45			
6									
7									
8									
9									
10									
\bar{X}									
R									
							APPROVED BY		
							吳載敏		
							CHECKED BY		
							張明德		
							DRAWN BY		
							黃慧診		

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

RH-17.5×28.5×9.5 (B8)

