


RoHS

IP66-68

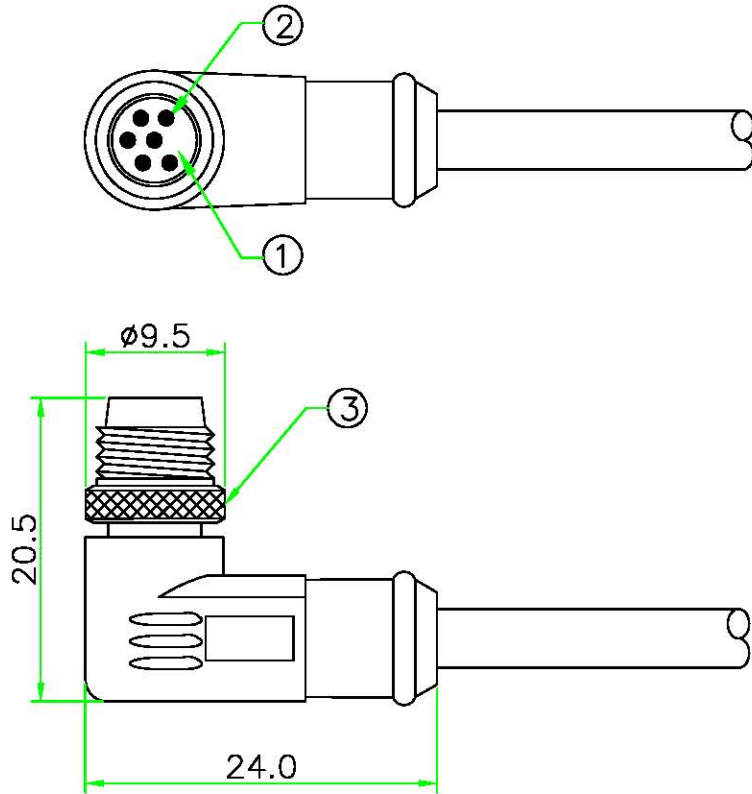

REV.	DESCRIPTION	DATE
A	ISSUE	July/01/2008
A1	Add Item	Apr/30/2015

Ref.

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 1.5A / 3A

TEMPERATURE RANGE: -20°C TO +80°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: A08x-M1xxRN

02 - 2 PINS 05 - 5 PINS


03 - 3 PINS 06 - 6 PINS

04 - 4 PINS

I - CURRENT RATING 1.5A

D - CURRENT RATING 3A

*Cable specification and length can be customized.

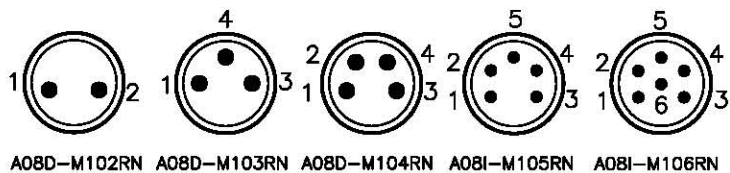

PIN ASSIGNMENT FRONT VIEW

(前視圖)

3	RING NUT	Brass, Nickel plated.		1	
2	CONTACT	Brass, 6 u" Gold plated . Male Contact.		N	
1	CONNECTOR	M8 A-Coding Male Connector Insert.NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
	UNIT: mm	TITLE : M8 A-Coding Male R/A molded cable			
SCALE	2:1	P/N: A08x-M1xxRN		DR. Patty	
UNLESS OTHERWISE SPECIFIED TOLERANCES:		.X ± 0.25 .XX ± 0.1		CH. ERIC	
.XXX ± 0.05 ANGLE ± 1°		DWG.NO: A08x-M1xxRN		AP.	
REV.	SHEET				
A1	1/1				