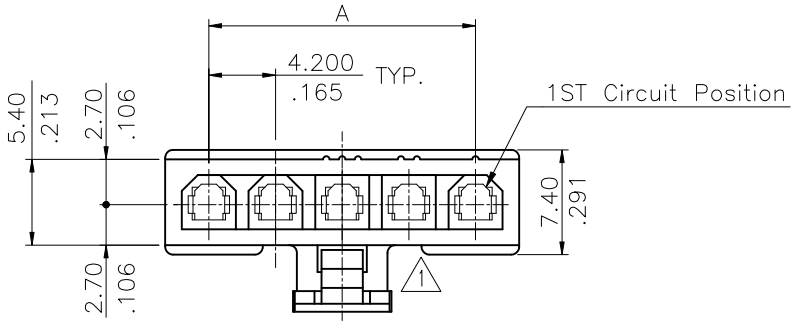

Material:
* Insulation: Nylon 66, Color Nature

Ordering Code:

CP-01 ① 1 ② ** ③ 0 ④ * ⑤ S ⑥

① Series No.
② Contact Type: 1= Receptacle
③ No of Circuits:
④ Plating Code: 0= Non plating
⑤ Variation: 1= UL 94V-2
3= UL 94V-0
⑥ Option: S= Single Row

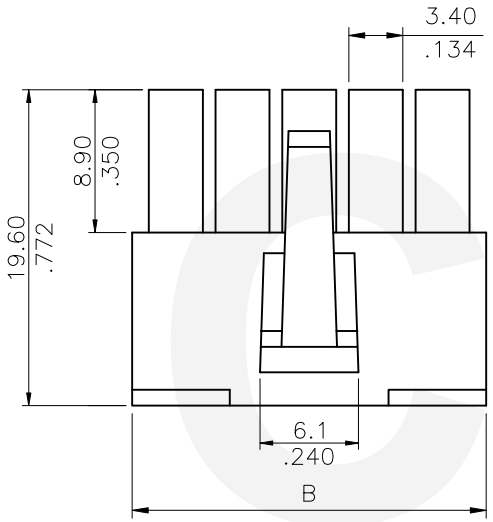

FOR 4 , 5 CIRCUITS

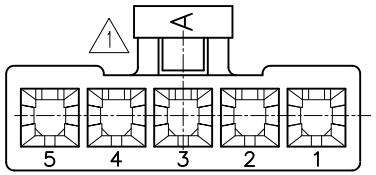

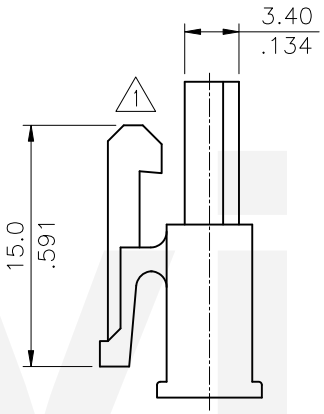

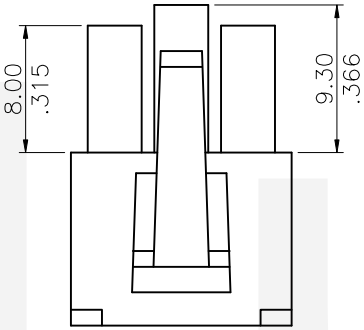

FOR 3 CIRCUITS

Circuits	Dimension	
	A	B
3	8.40(.331)	13.8(.543)
4	12.60(.496)	18.0(.709)
5	16.80(.661)	22.2(.874)



3 CIRCUITS



4 CIRCUITS



5 CIRCUITS

CIRCUIT PATTERN SCHEDULE

Halogen-Free

SYM	NAME	DATE	REVISIONS
4			
3			
2			
1	Karen	11/10-20'	ECNT120261/ECRB120046

CVILUX CORP 2020.11.26 ISSUED

		DATE
DRAWN BY:	Karen	11/12-20'
ENGINEER:	Sun	11/13-20'
CHECKED BY:	Eisley	11/18-20'
APPROVED BY:	Eisley	11/18-20'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ± 0.38/.015	X.° ± 1°
.XX ± 0.25/.010	.X° ±
.XXX ± 0.10/.004	.XX° ±

TITLE: 4.20mm PICH RECEPTACLE CONN. (SINGLE ROW)

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CP0178SB	PART NO.	CP-011**0*S
SCALE	2 / 1	SHEET	1 OF 1