


* Material: Noryl UL 94V-1
Color Black

* Without polarizing rib ---- P/N: CI34**S0010

* With Polarizing rib ----- P/N: CI34**S001A

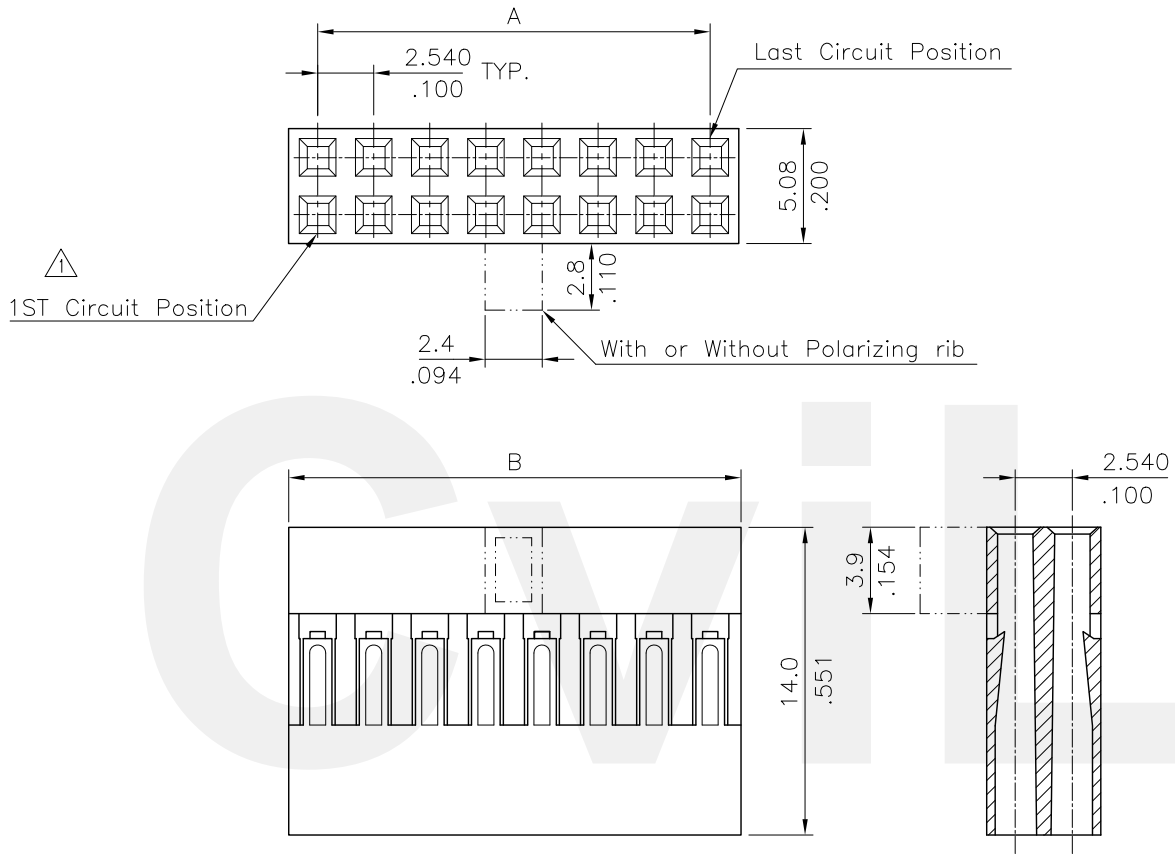

Circuits	Dimension	
	A	B
4	2.54(.100)	5.1(.201)
6	5.08(.200)	7.6(.299)
8	7.62(.300)	10.2(.402)
10	10.16(.400)	12.7(.500)
12	12.70(.500)	15.2(.598)
14	15.24(.600)	17.8(.701)
16	17.78(.700)	20.3(.799)
18	20.32(.800)	22.9(.902)
20	22.86(.900)	25.4(1.000)
22	25.40(1.000)	27.9(1.098)
24	27.94(1.100)	30.5(1.201)
26	30.48(1.200)	33.0(1.299)
28	33.02(1.300)	35.6(1.402)
30	35.56(1.400)	38.1(1.500)
32	38.10(1.500)	40.6(1.598)
34	40.64(1.600)	43.2(1.701)
36	43.18(1.700)	45.7(1.799)
38	45.72(1.800)	48.3(1.902)
40	48.26(1.900)	50.8(2.000)

RoHS Compliant

	CVILUX CORP		DATE	UNIT: mm / inch		TITLE: 2.54MM(.100")	瀚荃股份有限公司 CviLux Corporation		
	2010.11.30			DRAWN BY: Sandy	TOLERANCE UNLESS OTHERWISE SPECIFIED			DUAL ROW CRIMP TERMINAL HOUSING	
	ISSUED			ENGINEER: Clark	.X ± 0.30/.012	X.' ± 1'		MATERIAL:	
	Sandy	11/10-10'		ECN10365	CHECKED BY: David	11/22-10'		.XX ± 0.20/.008	.X' ±
SYM	NAME	DATE	REVISIONS	APPROVED BY: David	11/22-10'	.XXX ± 0.10/.004	.XX' ±	DRAWING NO. CI3401SD	PART NO. CI34**S001*
SCALE 3 / 1								SHEET 1 OF 1	