
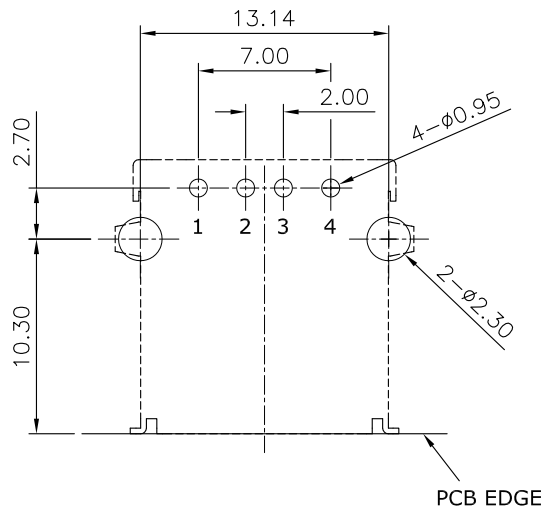
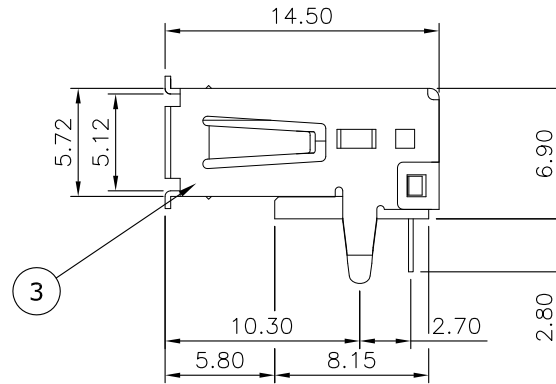


REV.	DESCRIPTION	DRAWN	DATE
2	REVISED FRAME	Willis	2014/08/03
3	REVISED FRAME	Fros	2014/12/29
4	PCB LAYOUT BOTTOM VIEW -> TOP VIEW	Tim	2018/06/12

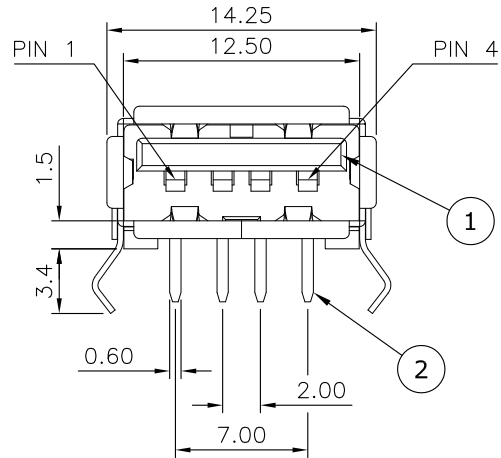

RECOMMENDED LAYOUT (TOP VIEW) ④
 GENERAL TOLERANCE: ±0.10mm

PRODUCT NUMBER:

205B-D A N 0 - R
 1 2 3 4 5

1. Type
D: Through hole
2. Contact Plating
A: Gold Flash
3. Shell Plating
N: Nickel Plating
4. Top or Reverse
0: Top Mount
5. RoHS

SPECIFICATION:

1. Contact Resistance: 30mΩ Max.
2. Insulation Resistance: 1000MΩ Min. at 500VDC
3. Rated Voltage and Current: 1.5A at 250VAC Min.
4. Dielectric Withstanding Voltage: 750VAC (rms) for 1 Minute (rev.1.1)
5. Durability (Life Test): 1,500 Cycles
6. Insertion Force: 35N Max.
7. Extraction Force: 10N Min.

3	SHELL	BRASS T0.3, NI 80~120u" PLATED
2	CONTACT	PHOSPHOR BRONZE T0.25, PLATING: GOLD: 1~3u" (CONTACT) Ni: 40~60u", Tin: 120u" (Solder area)
1	HOUSING	PBT G/F, WHITE
NO.	PART NAME	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°



WWW.ATTEND.COM.TW

DRAWN	Willis	2012/05/16	DRAWN NAME: USB A Receptacle, Top Mount DIP Type, White	
CHECKED	Angel	2012/05/16		
APPROVED	Ken	2012/05/16	PRODUCT NO.	205B-DAN0-R
SCALE	2.5/1	SHEET	1/1	SIZE
			FILE NAME	205B-DAN0-R_B_4