

Euromas II

Enclosure, polycarbonate



EM 210 F
Order no.: 62210200

* = Available on request.

Characteristics

Colour of enclosure group

Light grey

Protection class

IP 65

Enclosure Material

ABS, PC (UV stabilised); seal made of CR; for details see
Technical Information

Scope of delivery


Lid and base, self-tapping coarse-pitch thread lid screws made of
V2A

Dimensions

Dimensions

82 x 80 x 57 mm

Product drawing

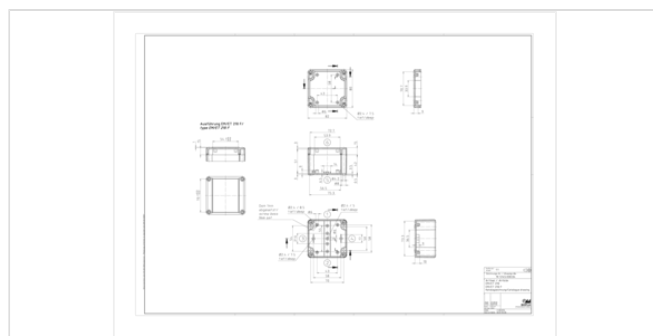

Important!

To compensate for pressure when temperatures change and cause moisture in the enclosure, we recommend that you use a pressure compensation element.

» Additional information

Technical documentation / Downloads

Technical drawings

3D product data in STEP format: 62210200 EM-210-F.stp (1.1 MB)

Drawing for mechanical processing: 62210200 EM-210-F-G.dxf (461.5 KB)

Milling contours are shown here as a DXF file. (Sub D, USB, HDMI, cable glands, ...)

Product drawing in PDF format: 62210200 EM-210-F.pdf (77.0 KB)

Product information

Euromas II DE.pdf (254.5 KB)

Matching accessories



DIN rail acc. to DIN EN 60715 TH 15

22150701 TS 15

For EM/ET 207-210, EM/ET 225, B
1008..



DIN rail acc. to DIN EN 60715 G 32

22320701 TS 32

For EM/ET 208-210, EM/ET 225, B
1008..



DIN rail acc. to DIN EN 60715 TH 35

22350701 TS 35

For EM/ET 208-210, EM/ET 225, B
1008..