


APPROVED: _____
 DATE: _____ TITLE: _____

| Rev | AWO # | Description | Date | Appr |
|-----|-------|---------------|---------|-------|
| - | | RELEASED | 3/30/16 | |
| A | | UPDATED SPEC. | 6/20/16 | HR/CK |


4.30mm Length

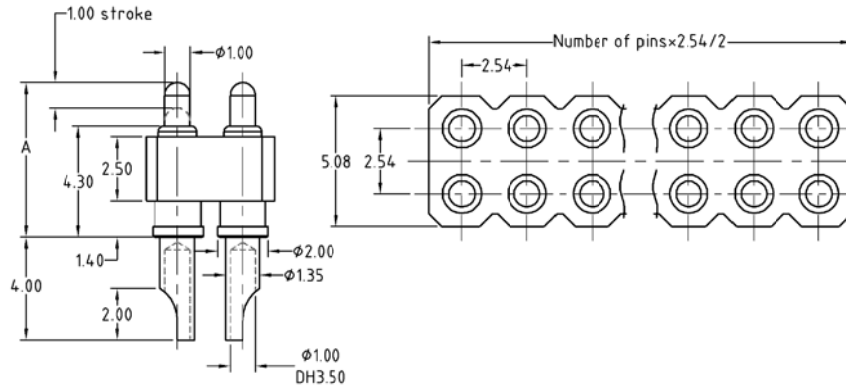

Positions: 02 thru 40
 Example: PH2-3B-08-MVS-4355 = 2X4 PIN

| ADAM P/N | Initial Height |
|--------------------|----------------|
| PH2-3B-XX-MVS-4355 | 5.5mm |
| PH2-3B-XX-MVS-4360 | 6.0mm |

5.30mm Length

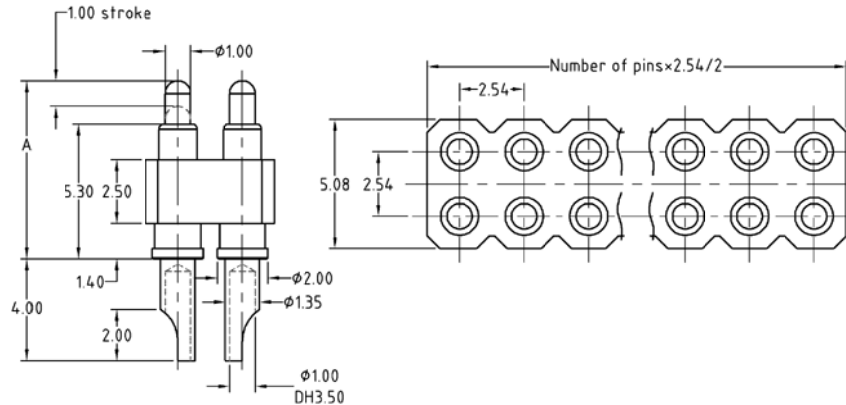

Positions: 02 thru 40
 Example: PH2-3B-08-MVS-5365 = 2X4 PIN

| ADAM P/N | Initial Height |
|--------------------|----------------|
| PH2-3B-XX-MVS-5365 | 6.5mm |
| PH2-3B-XX-MVS-5370 | 7.0mm |
| PH2-3B-XX-MVS-5375 | 7.5mm |
| PH2-3B-XX-MVS-5380 | 8.0mm |

SPECIFICATIONS:

Material:
 Insulator: Black plastics, Color: Black, rated UL 94V-0
 Plunger: Brass, Gold plated
 Barrel: Brass, Gold plated
 Spring: SUS Surface treatment
Electrical:
 Voltage rating: 12 VDC max
 Current rating: 3 A max
 Contact resistance: 20 mohms max
Mechanical:
 Spring force: 70g±20g @ 1.0mm working stroke
 Full stroke: 1.40mm
 Life test: 1,000,000 Cycles
 Temperature Rating:
 Operating temperature: -40°C to +80°C
Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MILLIMETERS
 TOLERANCES: EXCEPT AS NOTED
 HOLES
 MM
 .X ± .25
 .XX ± .15 Ø.XX ± .013
 .XXX ± .05

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: CUSTOM LENGTH TUBE DOUBLE ROW STRIPS
 2.50MM INSULATOR HEIGHT, SOLDER CUP

| APPROVALS | | DATE |
|-----------|----|---------|
| DRAWN | HR | 3/30/16 |
| CHECKED | CK | 3/30/16 |
| APPROVED | | |

| SIZE | PART NO. | REV. |
|--------------|--------------------|--------------|
| X | PH2-3B-XX-MVS-XXXX | A |
| REF: S00170C | SCALE: NTS | SHEET 1 OF 1 |