

Multilayer Ceramic Chip Capacitors

C2012X7T2W473K125AE










TDK item description C2012X7T2W473KT***S

Applications	Commercial Grade Please refer to Part No. CGA4J4X7T2W473K125AE for Automotive use.	
Feature	Mid Mid Voltage (100 to 630V) Soft Soft Termination	
Series	C2012 [EIA 0805]	
Status	Production	



	Size
Length(L)	2.00mm +0.45,-0.20mm
Width(W)	1.25mm +0.25,-0.20mm
Thickness(T)	1.25mm +0.25,-0.20mm
Terminal Width(B)	0.20mm Min.
Terminal Spacing(G)	0.50mm Min.
Recommended Land Pattern (PA)	1.00mm to 1.30mm(Flow Soldering)
recommended Land Fattern (FA)	0.90mm to 1.20mm(Reflow Soldering)
Recommended Land Pattern (PB)	1.00mm to 1.20mm(Flow Soldering)
	0.70mm to 0.90mm(Reflow Soldering)
Recommended Land Pattern (PC)	0.80mm to 1.10mm(Flow Soldering)
necommended Edna Factorii (Fe)	0.90mm to 1.20mm(Reflow Soldering)

Electrical Characteristics		
Capacitance	47nF ±10%	
Rated Voltage	450VDC	
Temperature Characteristic	X7T(+22,-33%)	
Dissipation Factor (Max.)	2.5%	
Insulation Resistance (Min.)	10000ΜΩ	

Other	
Caldarina Mathad	Wave (Flow)
Soldering Method	Reflow
AEC-Q200	No
Packing	Blister (Plastic)Taping [180mm Reel]
Package Quantity	2000pcs

[!] Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.

C2012X7T2W473K125AE














Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

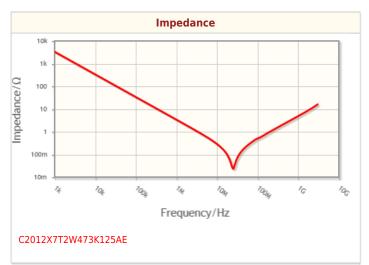


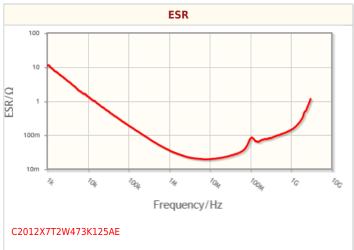

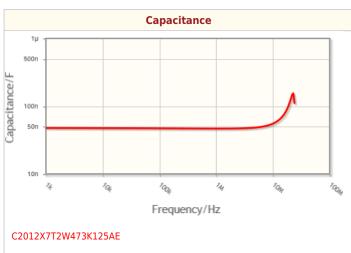

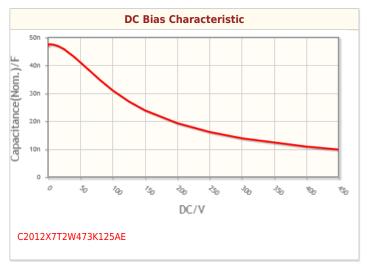

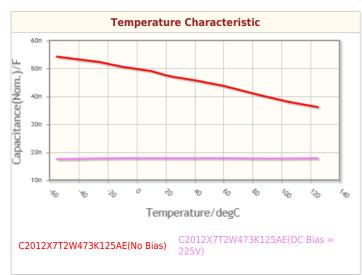

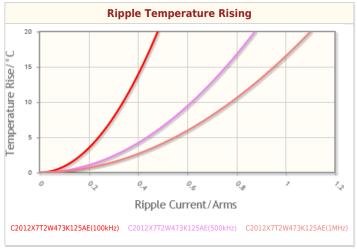

[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.

C2012X7T2W473K125AE










Associated Images



[!] Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.