

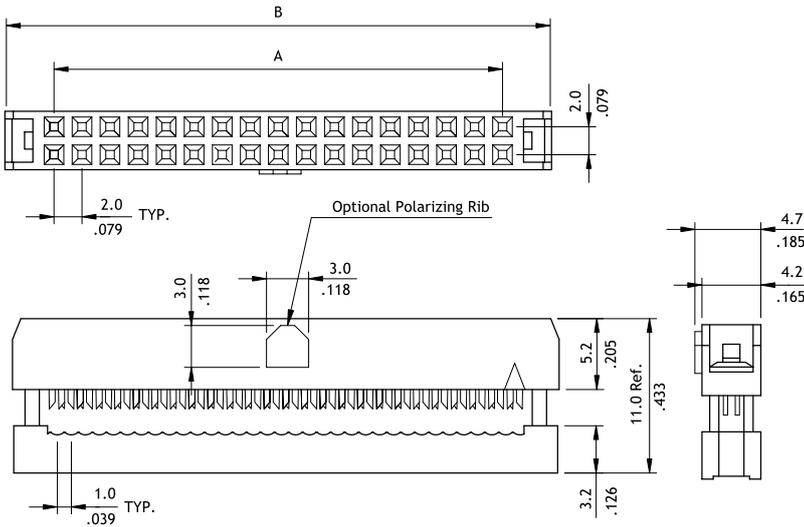


CA11 Series 2.00mm(.079")Center Spacing Flat Cable-IDC Socket

- ⊙ Mates with CH71, CH75 and CH74 headers
- ⊙ Can be used CW02 1.00mm(.039") Center Spacing flat ribbon cable

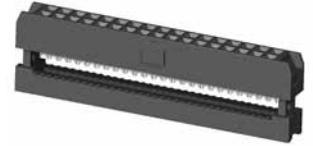

Circuits	Dimension		
	A	B	C
6	4.0(.157)	11.2(.441)	11.2(.441)
8	6.0(.236)	13.2(.520)	13.2(.520)
10	8.0(.315)	15.2(.598)	15.2(.598)
12	10.0(.394)	17.2(.677)	17.2(.677)
14	12.0(.472)	19.2(.756)	19.2(.756)
16	14.0(.551)	21.2(.835)	21.2(.835)
18	16.0(.630)	23.2(.913)	23.2(.913)
20	18.0(.709)	25.2(.992)	25.2(.992)
22	20.0(.787)	27.2(1.071)	27.2(1.071)
24	22.0(.866)	29.2(1.150)	29.2(1.150)
26	24.0(.945)	31.2(1.228)	31.2(1.228)
30	28.0(1.102)	35.2(1.386)	35.2(1.386)
32	30.0(1.181)	37.2(1.465)	37.2(1.465)
34	32.0(1.260)	39.2(1.543)	39.2(1.543)
36	34.0(1.339)	41.2(1.622)	41.2(1.622)
38	36.0(1.417)	43.2(1.701)	43.2(1.701)
40	38.0(1.496)	45.2(1.780)	45.2(1.780)
44	42.0(1.654)	49.2(1.937)	49.2(1.937)
48	46.0(1.811)	53.2(2.094)	53.2(2.094)
50	48.0(1.890)	55.2(2.173)	55.2(2.173)
56	54.0(2.126)	61.2(2.409)	61.2(2.409)
60	58.0(2.283)	65.2(2.567)	65.2(2.567)
64	62.0(2.441)	69.2(2.724)	69.2(2.724)
68	66.0(2.598)	73.2(2.882)	73.2(2.882)

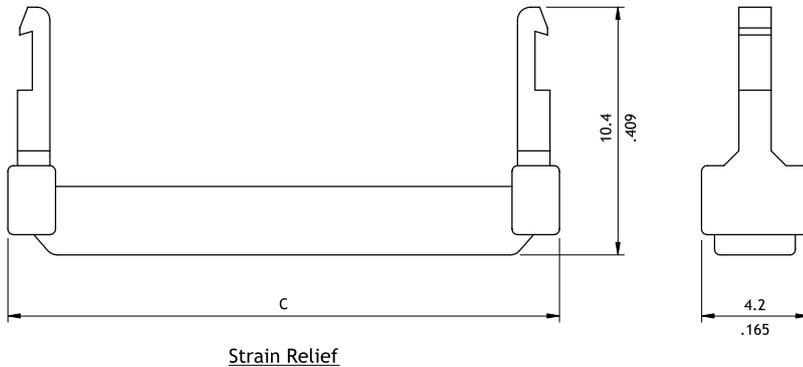

Strain Relief

Ordering Code

1 2 3 4 5 6
CA11 68 S A 1 00

- 1 Series No.
- 2 No. of Circuits: See drawing
- 3 Contact type: S = Socket
- 4 Plating code:
A = Selective Gold flash over Nickel
*Optional plating available but MOQ requested
- 5 Color: 1 = Black
- 6 Other Options:
00 = With Polarizing Rib (Standard)
A0 = Without Polarizing Rib
*Special options Consult manufacturer

Strain Relief

1 2 3 4
CA11 68 SR 100

- 1 Series No.
- 2 Contacts: See drawing
- 3 SR = Strain-Relief
- 4 Color: 100 = Black