

## Data sheet Product SL 22 112 14 G




PCB connectors > Male headers  
two rows, □ 0.635 mm

### Features

<b>grid</b>	2.54 mm
<b>no. of contacts</b>	14
<b>contact material</b>	CuSn alloy
<b>surface of contact</b>	gold-plated
<b>surface contact / contact sleeve</b>	<ul style="list-style-type: none"> <li>• Ni+≥0.2μm Au</li> <li>• Ni+4...6μm Sn</li> </ul>
<b>version</b>	standard
<b>volume resistance</b>	≤5 mΩ
<b>nominal current</b>	3 A
<b>nominal voltage</b>	250 V AC
<b>test voltage</b>	2000 V
<b>insulating body material</b>	PA 4.6. GF
<b>temperature range</b>	<ul style="list-style-type: none"> <li>• -40°C... +163°C</li> <li>• (260°C/10 s)</li> </ul>
<b>class of inflammability</b>	UL 94 V-0
<b>specific insulation resistance</b>	>10.0 <sup>7.0</sup> Ω·m
<b>connection type</b>	-
<b>reflow solderable</b>	yes

# Technical Drawing

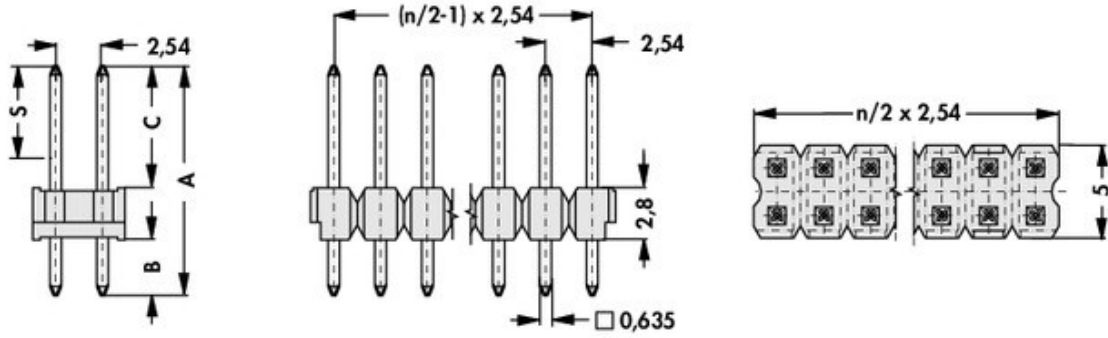

11.2

height

**A [mm]**

**B [mm]**

**C [mm]**

**S [mm]**

3

5.4

4.0

**Fischer Elektronik GmbH & Co. KG**  
DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28  
58511 Lüdenscheid

Telefon +49 2351 435-0  
Telefax +49 2351 45754

info@fischerelektronik.de  
www.fischerelektronik.de