

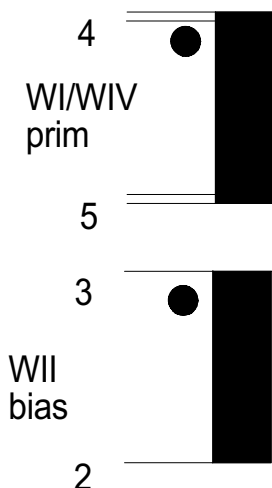


Technical Data Sheet

Customer:
Kaschke Göttingen

Part designation:
SP-E 30/7

Customer part no.:
SKOP246-28-58

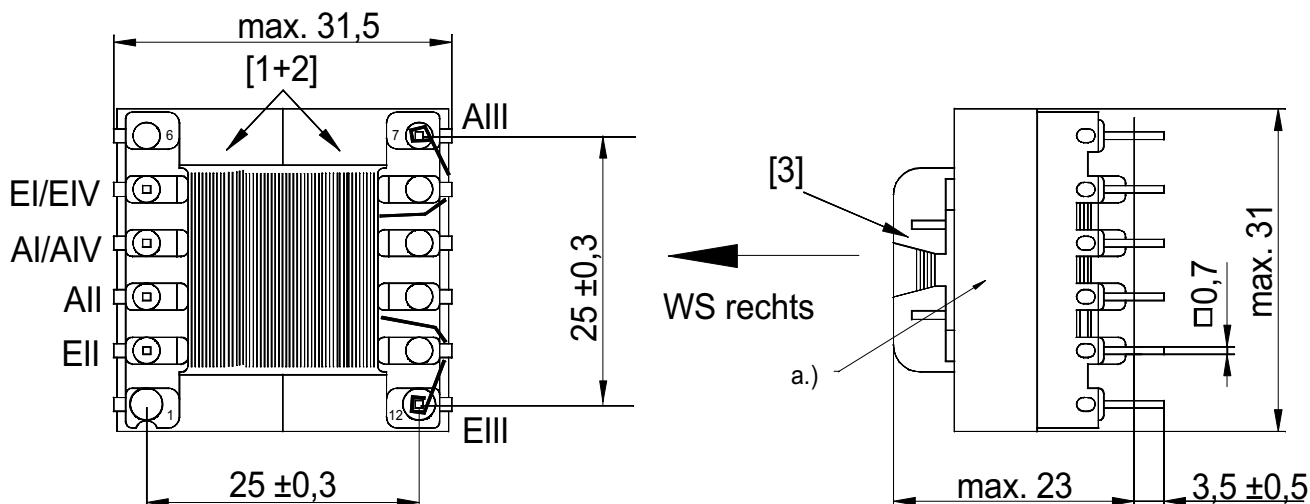

Core / material / air gap / AL	E30/7 / K2006 or equiv.	
Nominal inductance	LI= 290 µH ±10%	
maximum transmissible power	56 W	
Working frequency	132 kHz	
Transformation ratio	44:6:12:44	
dielectric strength (50Hz/2s)	Prim-Sec = 3,75kV/50Hz/1sec	
Nominal Current		
Design in comp. with standard	.	
Working / storage temperature	-25°C- +115°C	-25°C- +85°C
Miscellaneous	F (DIN 40040)	
leakage inductance	max. 8µH	

Remarks : a.) marking
 - parallel split primany

Measuring device of L **W&K 3260A**Measuring conditions of L: **50mV/10kHz/25°C**[illegible]

Responsible person:

Uwe Dickhut

Date:

..

Design regulation no:

066.931

Index:

a

PLEASE GIVE US YOUR WRITTEN RELEASE

Date _____

Signature