


**CP33 Series 5.08mm (.200") IDC Receptacle Power Connectors**



- ⊙ Insulator displacement termination
- ⊙ Option closed end daisy chain cover
- ⊙ Mates with CP32 or CP33 Plug connector
- ⊙ Accept AWG #18 ~#22 wire
- ⊙ Nylon 66 UL 94V-0 or V-2 Color Nature
- ⊙ Contact: Tin plated Phosphor Bronze



RoHS Compliant



Part No.	Flame Class	Wire Range
CP3304S1000	94V-2	AWG #18-#20
CP3304S100A	94V-2	AWG #22
CP3304S100B	94V-0	AWG #18-#20
CP3304S100C	94V-0	AWG #22

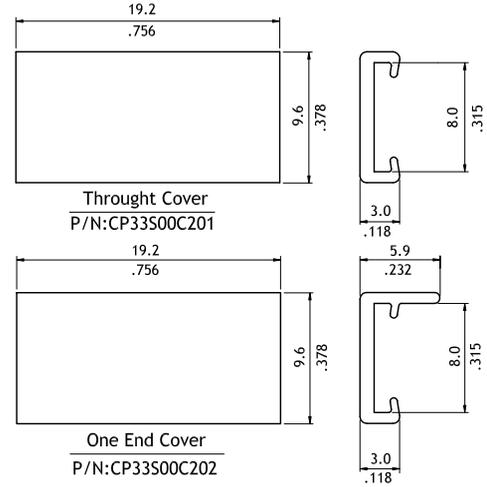

**CP33 Series 5.08mm (.200") Board Mount Plug Power Connectors**

- ⊙ Optional mounting pegs
- ⊙ Mates with CP33 Receptacle connector
- ⊙ Nylon 66 UL 94V-0 or V-2 Color Nature
- ⊙ Contact: Tin plated Phosphor Bronze



RoHS Compliant

