Materials :

Insulator : Glass filled polyester UL 94V-0
Color Beige

Contacts : Phosphor Bronze

⚠2 Shell Plating: 80μ Nickel over 50μ Cu

Ordering Code:

CU01 S A V 0 S 00
① ② ③ ④ ⑤ ⑥ ⑦

① Series No.
② S= Socket
③ Plating option:
A= Selective Gold flash plated over 50μin Nickel
C= Selective 30μin Gold plated over 50μin Nickel
④ V= Straight DIP
⑤ Insulator Color: 1= Black, 0= White
⑥ S= Single port
⑦ Option: 00= Standard

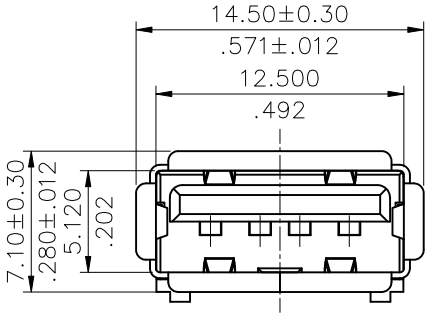

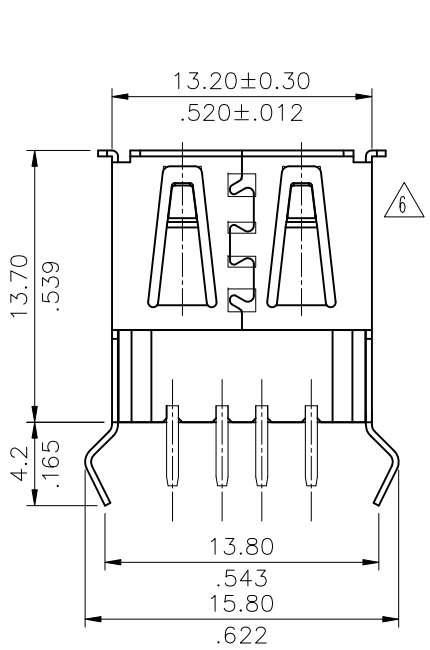

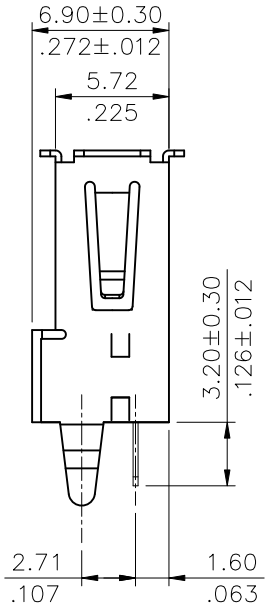

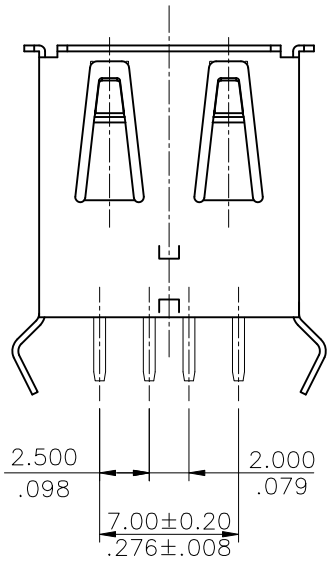

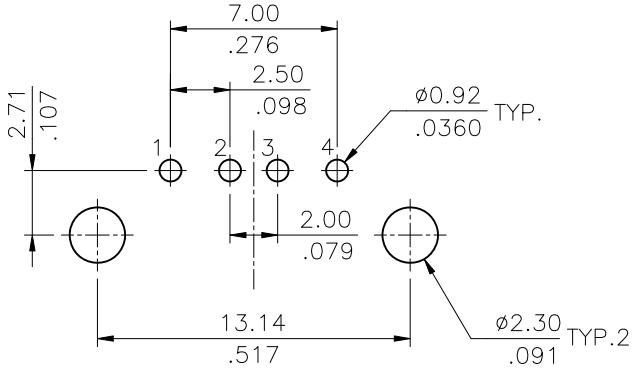

Recommmended P.C. Board Layout
TOP VIEW(TOLERANCE:±0.10)

RoHS Compliant

SYM	NAME	DATE	REVISIONS
⚠6	Karen	3/17-21'	
⚠5	Karen	2/19-21'	ECNT121004/ECRT120089
⚠4	Sun	7/07/15'	ECRB115038/ECNT115162
⚠3	Hank	11/8/06'	ECN06412

		DATE
DRAWN BY:	Karen	3/17-21'
ENGINEER:		
CHECKED BY:		
APPROVED BY:		

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ± 0.25 / .009	X.° ± 4°
.XX ± 0.20 / .008	.X° ± 2°
.XXX ± 0.10 / .004	.XX° ±

TITLE: U.S.B TYPE-A STRAIGHT BOARD MOUNT SOCKET

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CU0112SJ	PART NO.	CU01S*V*S00
SCALE	3 / 1	SHEET 1 OF 1	