


ENCLOSURE FOR WALL MOUNTING

SERIES 301

NEW designed version with concave front also available

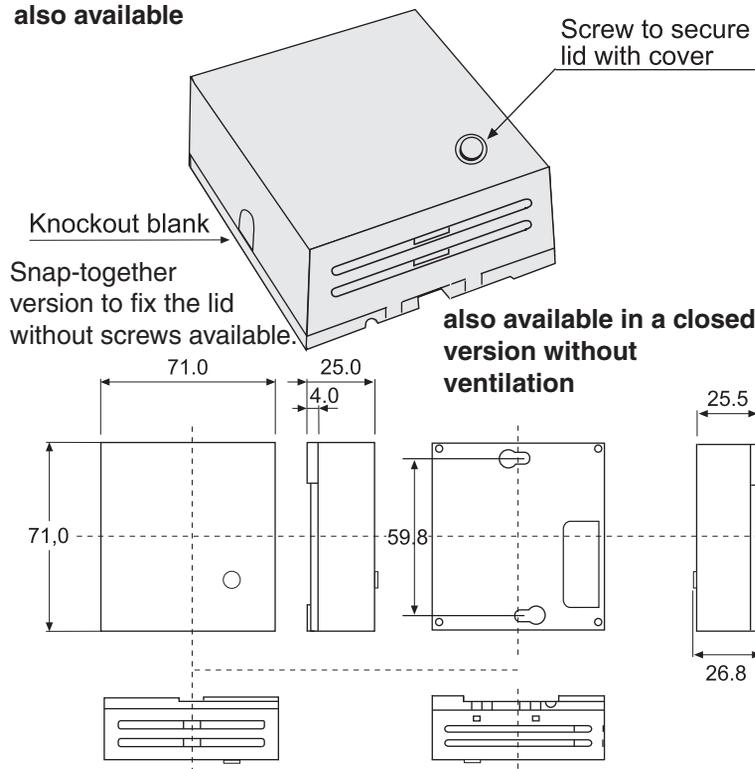

Snap-together version to fix the lid without screws available.

also available in a closed version without ventilation

Enclosure for wall mounting. Suitable for sensors etc. Possibility for 2 PCB's. PCB and packing are available. Standard colour is white/white but other colours can be supplied upon request.

PCB and packing are available.


TECHNICAL DATA:

Top part: Cycoloy C 2800
 Base part: Cycoloy C 2800
 Colour: White/white (RAL9010/RAL 9010)
 Temperature range: -30 - +100°C
 Self-extinguishing: Acc. to UL94-V0

Base part with battery holder for 2 pcs AAA-batteries available.



TYPE 301	ORDER CODE:
Complete: Top+base+1 screw	
+bushing + 2 blind covers	p/n 0669001301
Packing	p/n 2068300004
Raw PCB	p/n 4999000300
Light conductor	p/n 4972001258
Push button switch	p/n 4955127313

PCB DIMENSIONS

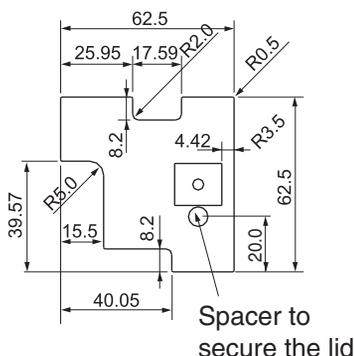

Possibility for integrated battery holder for wireless applications.

LIGHT CONDUCTOR for 300, 301, 600, 601 and 602



Can be used with SMD or leaded Ø3 mm LED's. Material: Clear PC

LIGHT CONDUCTOR	ORDER CODE:
For 300, 301, 600 and 601	p/n 4972001258
For 602	p/n 4972001257