CviLux

FFC/FPC CONNECTORS

CF20 Series 0.50mm(.020") H=2.00 SMT ZIF FFC/FPC Connectors

◎ 2.00 mm above the board
◎ Insulator: High temperature plastic UL 94V-0, Color Nature
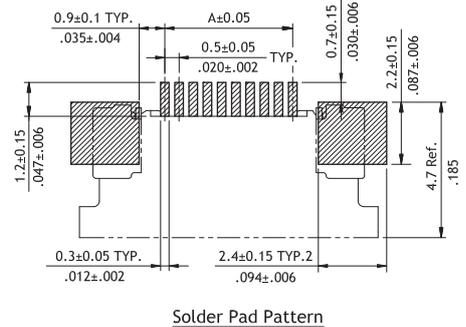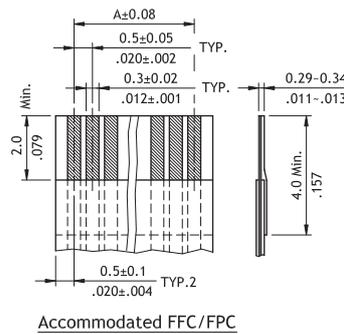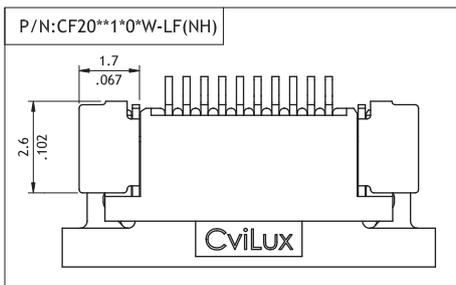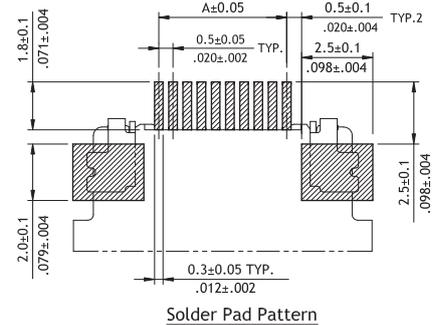◎ Slider: High temperature plastic UL 94V-0, Color Black
◎ With metal fixed tabs to secure connector in place

RoHS Compliant
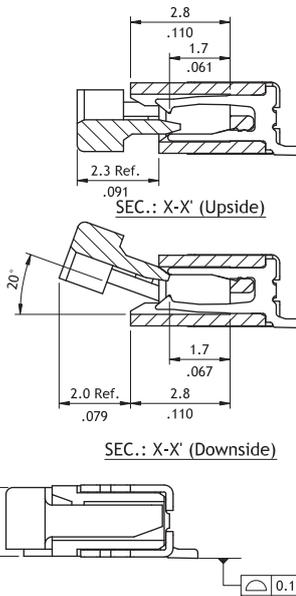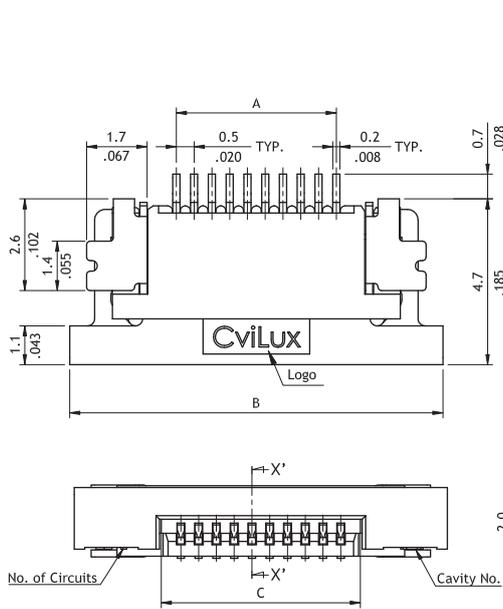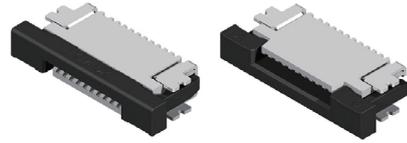
A = 0.5 * No. of Spaces
B = A + 6.0
C = A + 1.1

SEC.: X-X' (Upside)

SEC.: X-X' (Downside)

Solder Pad Pattern

P/N:CF20**1*0*W-LF(NH)

Accommodated FFC/FPC

Solder Pad Pattern

Ordering Code

①	②	③	④	⑤	⑥	⑦	⑧
CF20	55	1	D	0	R	0	- NH

① Series No.
② No. of Circuits: 04 to 55
③ Plating Code:
  1 = Matte Tin over Nickel
  2 = Gold flash over Nickel

④ Contact Style:
  U = Upside Contact
  D = Downside Contact
⑤ Color: 0 = Nature
⑥ Packing:
  R = Tape & Reel
  T = Tube

⑦ Other Options:
  0 = Standard
  W = Wide tabs
  * Special options consult manufacturer
⑧ Process: -LF = For Lead Free IR process
  -NH = For Lead Free IR process and Halogen-Free