

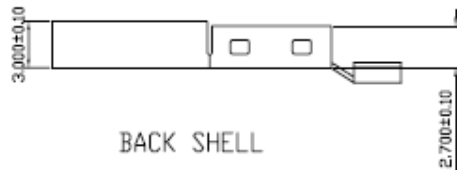
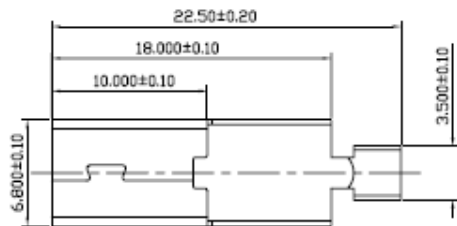





FRONT SHELL



BACK SHELL



VIEW A 5:1

Note:

1. Material:
 - 1.1 Insulator: P.B.T UL 94-V0 rated.
 - 1.2 Contact: Brass, t=0.25mm.
 - 1.3 Shell: Cold rolled steel, t=0.30mm.
2. Specification:
 - 2.1 Current rating: 1 A Max.
 - 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
 - 2.3 Contact resistance: 30 m Ω Max.
 - 2.4 Insulation resistance: 1000 m Ω Min at DC 500V.
 - 2.5 Temperature range: -65°C~+105°C.
3. Finishes:
 - 3.1 Contacts: Gold flashed 1u", 3u", 5u", 10U", 15u", 30u".
 - 3.2 Shell: Nickel plated.

RoHS Compliant

4	FRONT SHELL	1	Cold rolled steel	T=0.30±0.02mm	Nickel plated
3	BACK SHELL	1	Cold rolled steel	T=0.30±0.02mm	Nickel plated
2	CONTACT	5	Brass	T=0.25±0.02mm	Gold flashed
1	HOUSING	1	PBT		Black
No.	Part Name	Q'ty	Material	Thickness	Finish

PART NO. USB 5 MINI PLUG

DWG NO.

CHECKED BY

FILE NO.

DRAWING BY

UNIT / mm

SCALE 1:1

PROJECTION



TOLERANCES ARE

.X±0.2
.XX±
.XXX±
AWG

DESCRIPTION:

MINI U.S.B 5P MALE SOLDER(5出4)

AREA

REVISIONS

HK

DATE