



WINSTAR Display Co.,Ltd.
華凌光電股份有限公司



Winstar Display Co., LTD

華凌光電股份有限公司



WEB: <https://www.winstar.com.tw> E-mail: sales@winstar.com.tw

SPECIFICATION

CUSTOMER : _____

MODULE NO.: TST0005R0B4111XXXX05

APPROVED BY: (FOR CUSTOMER USE ONLY)	PCB VERSION:	DATA:
--	---------------------	--------------

SALES BY	APPROVED BY	CHECKED BY	PREPARED BY

VERSION	DATE	REVISED PAGE NO.	SUMMARY
A	2021/04/14		Modify Contour Drawing & Operation Temperature

MODLE NO :

RECORDS OF REVISION			DOC. FIRST ISSUE
VERSION	DATE	REVISED PAGE NO.	SUMMARY
0	2021/04/09		First issue
A	2021/04/14		Modify Contour Drawing & Operation Temperature

WINSTAR DISPLAY Co., Ltd.

Contents

1.General Specification

2.Interface Pin Function

3.Contour Drawing

4.Other

WINSTAR DISPLAY Co., Ltd.

1.General Specification

1.1. Feature:

NO.	Item	Specifications
1	Type	Projected Capacitive
2	Input Mode	Finger
3	Connecto	COF-IIC

1.2. General Specification:

NO.	Item	Specifications	Unit
1	Touch Panel Size	5.0(Diagonal)	inch
2	Structure	CTP	
3	View Area	109.00(H)x65.60(V)	mm
4	Outline Dimension	119.70(H)x75.20(V)x1.68(D)	mm

2.Interface Pin Function

Pin No.	Symbol	I/O	Description
1	VSS	---	System ground
2	VDDT	---	Power supply
3	SCL	I/O	I2C clock signal
4	NC	---	NC
5	SDA	I/O	I2C data signal
6	NC	---	NC
7	RST	I	External reset signal, active low
8	NC	---	NC
9	INT	O	Interrupt signal, active low, asserted to request Host start a new transaction
10	VSS	---	System ground

IC Specification

NO.	Item	Specifications
1	Driver IC	ILI2130
2	Detect Points	5
3	Interface	I2C
4	Power Supply	3.3V

FW : FN050IGRGXX025A_ILI2130_V01_20210319.hex

Test config:FN050IGRGXX025A_ILI2130_TP_Test_MP.ini

Version: 0X07.0X00.0X00.0X00.0XA1.0X25.0X50.0X00

4. Other

4.1 Environmental Characteristic

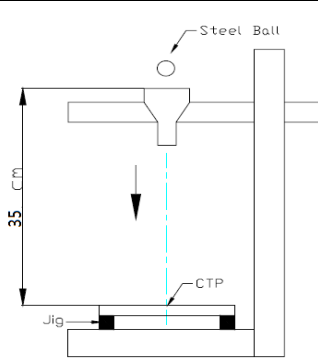
NO.	Item	Specifications
		Temperature
1	Operation	-30~80°C
2	Storage	-30~80°C

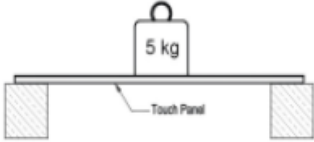
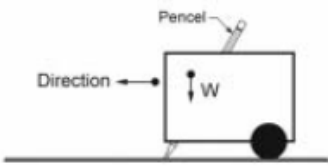
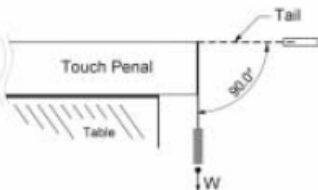
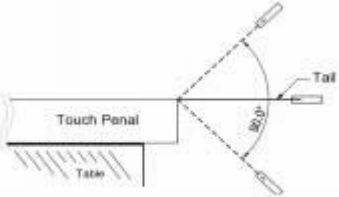
Note: Testing environment is under normal atmospheric pressure. When the ambient temperature is above 65°C, the humidity is allowed to be below 50%RH

4.2. Optical characteristics:

Items	Value
Transparency	(Min)85%

4.3 Mechanical Characteristic

NO.	Item	Condition	Specifications
1	Operating Force	Finger \leq 10g	Satisfy- 1. Optical Characteristics 2. Electrical Characteristics Appearance- 1. Ignore test area 2. No mechanical damage
2	Impact	30.0ΦDIA. Steel Ball/200g/Height=17.5cm/1 time, Impact at center area 	

NO.	Item	Condition	Specifications		
3	Static Load	5000g within 10cmΦ area for 30sec	<p>Satisfy-</p> <ol style="list-style-type: none"> 1. Optical Characteristics 2. Electrical Characteristics <p>Appearance-</p> <ol style="list-style-type: none"> 1. Ignore test area 2. No mechanical damage 		
					
4	Hardness	7H pencil, pressure 500g/45°		<p>Satisfy-</p> <ol style="list-style-type: none"> 1. Optical Characteristics 2. Electrical Characteristics <p>Appearance-</p> <ol style="list-style-type: none"> 1. Ignore test area 2. No mechanical damage 	
					
5	Tail Peeling	500g/cm by vertical 90° for 30sec			<p>Satisfy-</p> <ol style="list-style-type: none"> 1. Optical Characteristics 2. Electrical Characteristics <p>Appearance-</p> <ol style="list-style-type: none"> 1. Ignore test area 2. No mechanical damage
					
6	Tail Bending	90° 10times left & right	<p>Satisfy-</p> <ol style="list-style-type: none"> 1. Optical Characteristics 2. Electrical Characteristics <p>Appearance-</p> <ol style="list-style-type: none"> 1. Ignore test area 2. No mechanical damage 		
					

4.4 Reliability Test

NO.	Item	Condition	Specifications
1	Constant Temperature/Humidity	60°C X 90%RH, 240hrs and normalized for 24hrs	Satisfy- 1. Electrical Characteristics
2	Heat Cycle	80°C/240hrs and normalized for 24hrs	
3	Cold Cycle	-30°C/240hrs and normalized for 24hrs	
4	Thermal Cycle	-30°C ~ 80°C [30min/cycle]*10cycles and normalized for 24hrs	

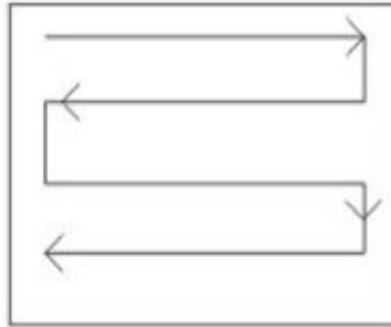
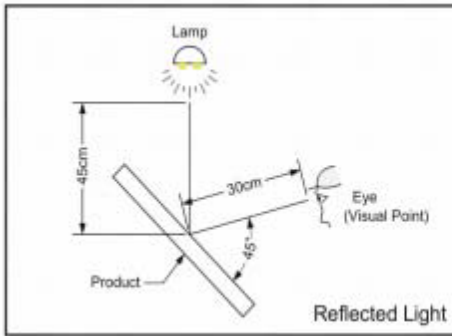
4.5 Function test

Function Test	<p>Test Method: Use $\Phi 8$ copper stick to draw the square diagonal line.</p> <p>Test Area: 5mm inward view area</p> <p>Disapproval Criteria: It is NG when we see the off-liner or jumping out spec shift.</p>	
---------------	--	--

4.6 Appearance Inspection

The inspection is to be performed with 20W(800-1000 LUX)fluorescent lamp lighting from the back or side.The panel is to be placed 35cm away from eyes.

Remark: The dirty of Cover Lens surface can be clean that can be acceptable.



4.7 Appearance Specification

NO.	Item	Specifications	Judgment
1	Dot Contamination	1) $D \leq 0.1\text{mm}$ 2) $0.10\text{mm} < D \leq 0.20\text{mm}$ 3) $0.2\text{mm} < D \leq 0.25\text{mm}$ 4) $D > 0.25\text{mm}$	1) Ignore 2) OK with 3 3) OK with 1 4) NG
2	Linear Contamination	1) $W \leq 0.03\text{mm}$ $L \leq 3\text{mm}$ 2) $W \leq 0.05\text{mm}$ $L \leq 2\text{mm}$ 3) $W > 0.05\text{mm}$ or $L \geq 3\text{mm}$	1) OK with 2 2) OK with 2 3) NG
3	Cracks and Chips(Surface)	$X < 0.2\text{mm}$, $Y < 0.2\text{mm}$, $Z < \frac{1}{2}T$	Ignore
<p><Endorse></p> <p>1.D=Diameter / W=Width / L=Length 2.Tail: Slight bend mark is allowed on the tail; crack or tear is not allowed. 3.Particle Spots: Flaws found coating if transparent, please follow Particle Spots specification. 4.Can wipe dirty oversight</p>			