
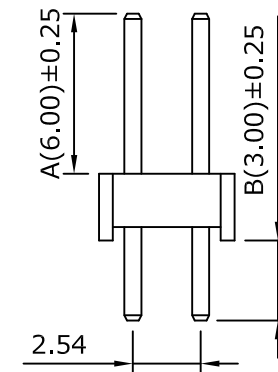
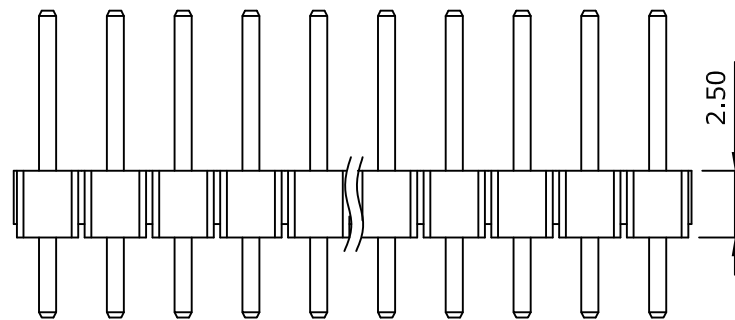
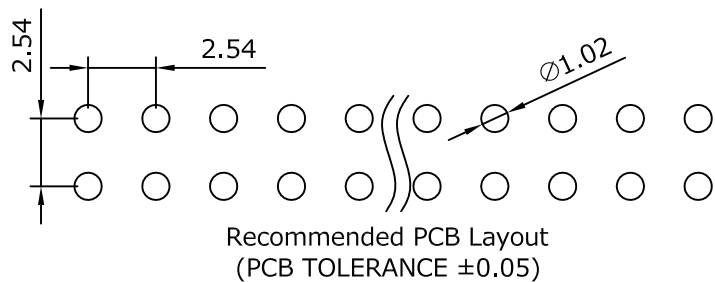


SPECIFICATIONS

Current Rating: 3A AC, DC
 Contact Resistance: 20m Ω Max
 Insulation Resistance: 1000M Ω Min
 Withstanding Voltage: 1000V AC for 1 minute
 Temperature Range: -40°C to +105°C
 Contact: Brass
 Insulator: NY6T+30% G.F., UL94V-0

ORDER INFORMATION

P	L	25	25	X	2	A/B - 2	XX
Straight Type		Height=2.5mm		NY6T		Customer Design Dimension	No. of Contacts Per Row (02~50)
Pitch 2.54mm		G0:Gold Flash G1:Gold 3u" G2:Gold 5u" G3:Gold 10u" G4:Gold 15u" G5:Gold 30u" T: Tin plated		S0:Selective Flash S1:Selective 3u" S2:Selective 5u" S3:Selective 10u" S4:Selective 15u" S5:Selective 30u"		Dual Row	

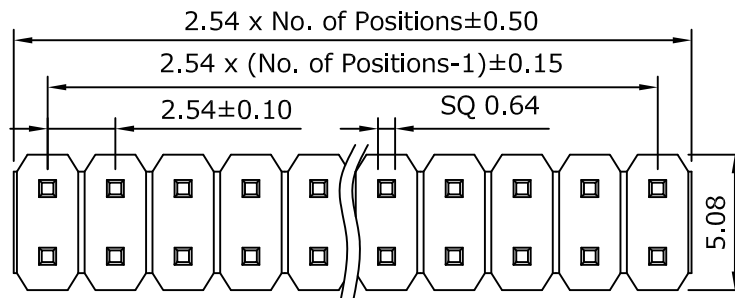

MCT

PART NO.	PL2525X2-2XX	DRAWN	Andrew
DRAWING NO.	PL2525X2-2XX	CHECKED	Claudia
DATE	2019/04/15	APPROVED	Brian

TITLE:	REV.	TOLERANCE	.X ± 0.25	SCALE	1:1	UNIT	mm
Pin Header 2.54mm H=2.5mm	A0	.XX ± 0.20					