




### Specifications

Current Rating: 3A AC,DC  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1000V AC/minute  
 Temperature Range: -40°C ~ +105°C



### Material

Insulator: P.B.T, UL94V-0  
 Contact: Copper Alloy

### ORDER INFORMATION

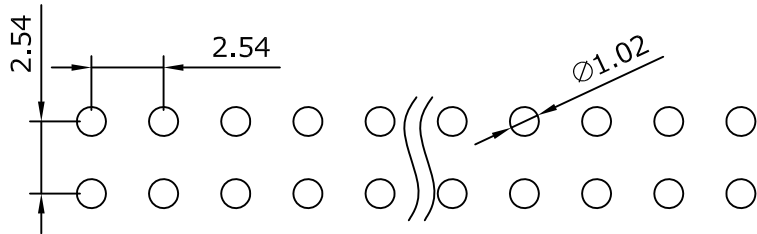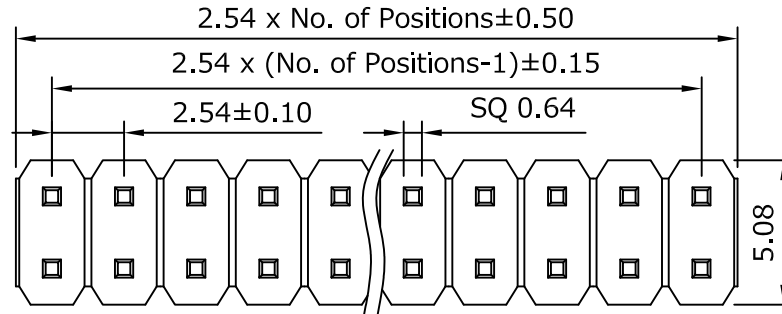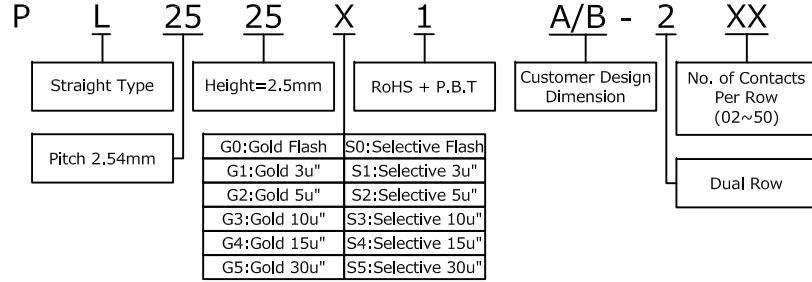

Recommended PCB Layout  
 (PCB TOLERANCE ±0.05)

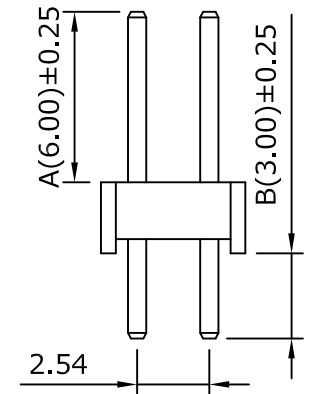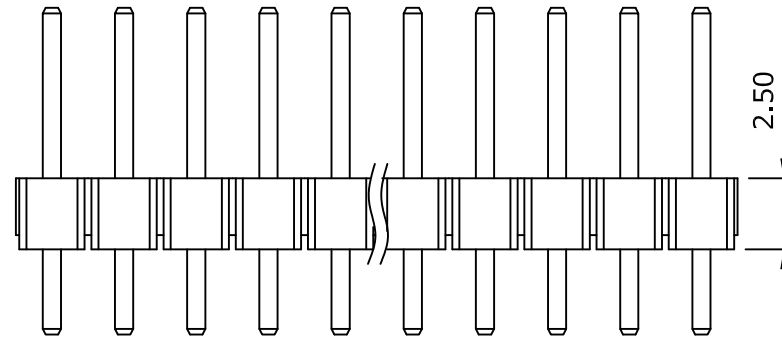

			<b>MCT</b>	PART NO.	PL2525X1A/B-2XX	DATA	2005/05/06		
				DRAWING NO.	PL2525X1A/B-2XX	DRAWN	Sayid		
				CUSTOMER P/N		APPROVED	Max		
REV.	DESCRIPTION	DATA	TITLE: Pin Header 2.54mm Plastic Height 2.5mm	REV. A	TOLERANCE .X ±0.25 .XX ±0.20	SCALE	FREE	UNIT	mm