


SPECIFICATIONS

Current Rating: 2A AC/DC
 Voltage Rating: 100V AC/DC
 Contact Resistance: 10m Ω Max
 Insulation Resistance: 1000M Ω Min
 Withstanding Voltage: 800V AC for 1 minute
 Temperature Range: -25°C to +85°C
 Contact : Brass, Tin plated
 Insulator: LCP, UL94V-0
 Solder Tab: Phosphor Bronze, Tin plated




ORDER INFORMATION

W 2001 ML - XX






RoHS COMPLIANT

No. of Contacts	Dimensions	
	A	B
2	2.00	7.95
3	4.00	9.95
4	6.00	11.95
5	8.00	13.95
6	10.00	15.95
7	12.00	17.95
8	14.00	19.95
9	16.00	21.95
10	18.00	23.95
11	20.00	25.95
12	22.00	27.95
13	24.00	29.95
14	26.00	31.95
15	28.00	33.95
16	30.00	35.95

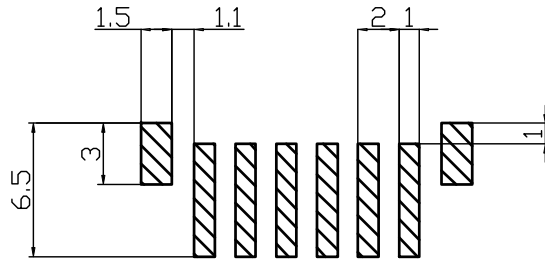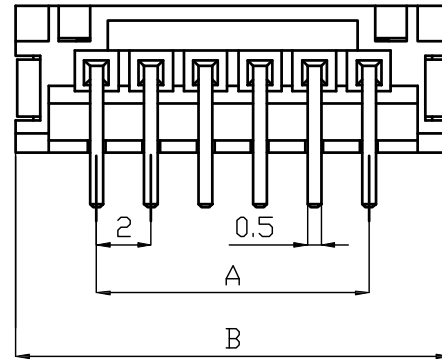

P.C.B LAYOUT

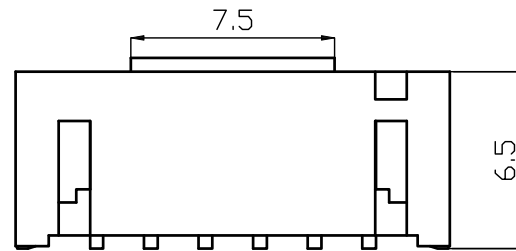

MCT	PART NO.	W2001ML-XX	DRAWN	Andrew
	DRAWING NO.	W2001ML-XX	CHECKED	Claudia
	DATE	2018/03/26	APPROVED	Brian

TITLE:	REV.	TOLERANCE	.X ±0.25	SCALE	1:1	UNIT	mm
Pitch 2.00mm Wafer SMT Straight Type	A0	.XX ±0.20					