





**NOTES**

**\*Material:**

- 1.Body: PPS UL 94V-0 Rated, Color:Black;
- 2.Cover: PPS UL 94V-0 Rated, Color:Black;
- 3.Contact: Phosphor Bronze;
- 4.Contact Plating: Gold Plating Over Nickel on Contact Area, Tin/Lead Plating on Terminal.

**\*Specification:**

- 1.Current Rating: 0.5 AMP. Max.;
- 2.Dielectric Withstanding Voltage: 500V AC R.M.S For One Minute;
- 3.Insulation Resistance: 1000 M Ohms Min. AT 500V AC;
- 4.Contact Resistance: 30 M Ohms Max.;
- 5.Operating Temperature: -25°C to +85°C;
- 6.Processing Temp: 230°C for 30~60 Seconds Max.;
- 7.Durability: 5000 Cycles.

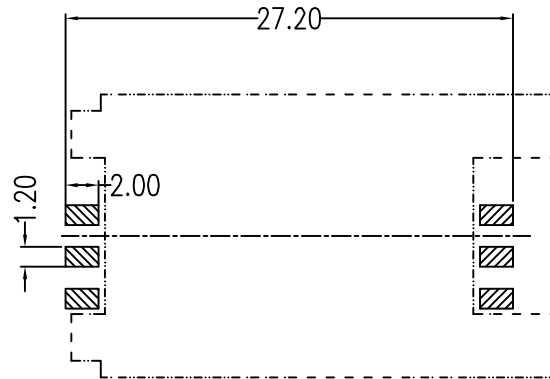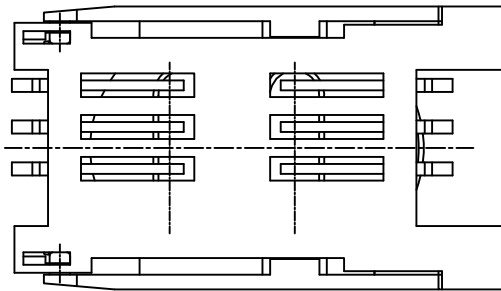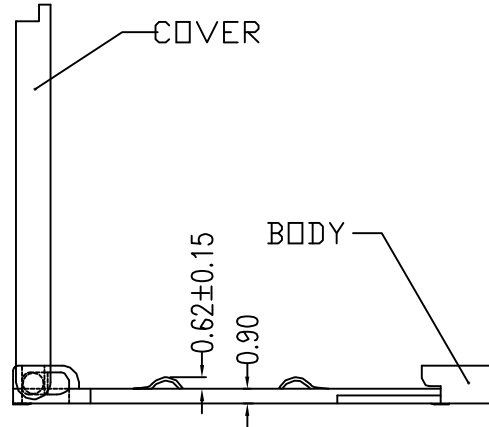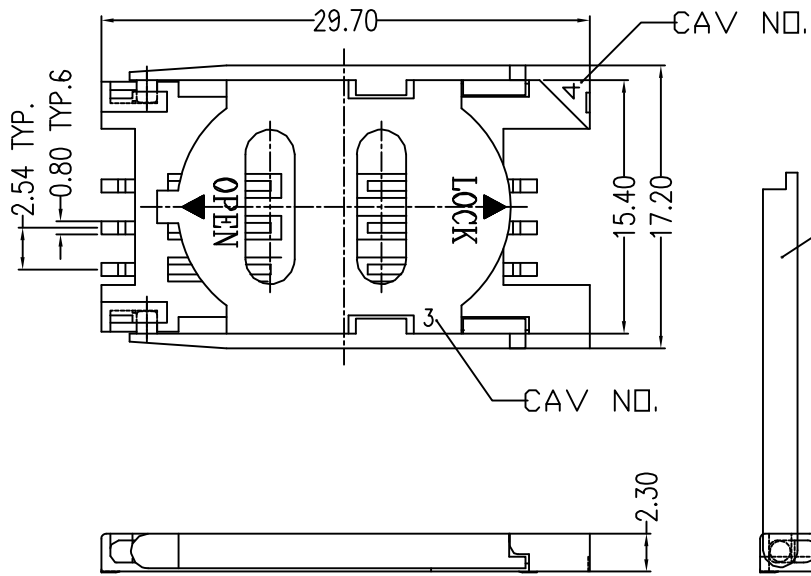

RECOMMEND P.C.B. LAYOUT  
TOP VIEW

B	PART NO.		APPROVED BY	CF	TOLERANCES ARE	DESCRIPTION:	SIM CARD OR P/N SOCKET			
	DWG NO.									
A	FILE NO.		DRAWING BY		X ± 0.32 XX ± 0.25 .XXX ± 0.20 AWG	AREA	REVISIONS	HK	DATE	
	UNIT /	mm	SCALE	1:1						