ACCEPTS .110 (2.8) TAB
HORIZONTAL ENTRY

.062 [1.55] .280 [7.1] .156 [4.0] .075 [1.90] .212 [5.4] .040 [1.00] .400 [10.2] .100 [2.5] .070 [1.80]
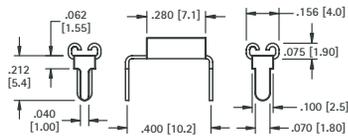
MATERIAL:
.012 (.30) thick Brass,
Tin Nickel Plate

CAT. NO.	ACCEPTS TAB
3545	.110 (2.8) × .020 (.50)
3549	.110 (2.8) × .032 (.80)

Mounting Detail
.400 [10.1]
.076 [1.9] DIA.
.046 [1.15] DIA.

ACCEPTS .205 (5.2) TAB
HORIZONTAL ENTRY

.062 [1.55] .250 [6.4] .240 [6.1] .098 [2.5] .212 [5.4] .062 [1.55] .400 [10.2] .180 [4.6] .100 [2.5]
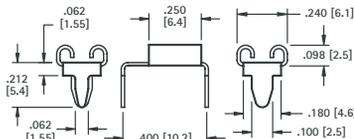
MATERIAL:
.012 (.30) thick Brass,
Tin Nickel Plate

CAT. NO.	ACCEPTS TAB
3546	.205 (5.2) × .020 (.50)
3550	.205 (5.2) × .032 (.80)

Mounting Detail
.400 [10.1]
.104 [2.6] DIA.
.067 [1.70] DIA.

ACCEPTS .250 (6.4) TAB
HORIZONTAL ENTRY

.062 [1.55] .250 [6.4] .291 [7.4] .098 [2.5] .212 [5.4] .062 [1.55] .400 [10.2] .205 [5.2] .100 [2.5]
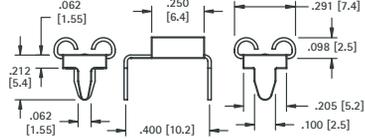
MATERIAL:
.016 (.41) thick Brass,
Tin Nickel Plate

CAT. NO.	ACCEPTS TAB
3547	.250 (6.4) × .032 (.80)

Mounting Detail
.400 [10.1]
.104 [2.6] DIA.
.067 [1.70] DIA.

ACCEPTS .110 (2.8) TAB
VERTICAL ENTRY

.156 [4.0] .200 [5.1] .196 [5.0] .440 [11.2] .125 [3.2] .144 [3.7] .062 [1.55] .086 [2.2] .070 [1.80]
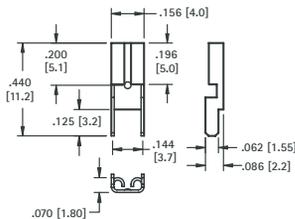
MATERIAL:
.012 (.30) thick Brass,
Tin Nickel Plate

CAT. NO.	ACCEPTS TAB
3534	.110 (2.8) × .020 (.50)
3544	.110 (2.8) × .032 (.80)

Mounting Detail
.144 [3.7]
.065 [1.65] DIA. (2) PLS

ACCEPTS .205 (5.2) TAB
VERTICAL ENTRY

.271 [6.9] .250 [6.3] .281 [7.1] .437 [11.1] .070 [1.80] .076 [1.90] .120 [3.0] .125 [3.2]
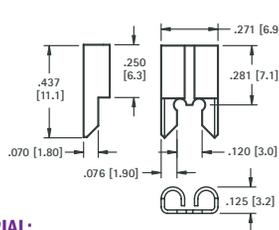
MATERIAL:
Brass, Tin Nickel Plate

CAT. NO.	ACCEPTS TAB	MAT'L THICK
3525	.205 (5.2) × .020 (.50)	.012 (.30)
3522	.205 (5.2) × .025 (.60)	.016 (.40)
	.205 (5.2) × .032 (.80)	.016 (.40)

Mounting Detail
.200 [5.1]
.100 [2.5] DIA. (2) PLS

ACCEPTS .250 (6.4) TAB
VERTICAL ENTRY

.291 [7.4] .250 [6.3] .281 [7.1] .437 [11.1] .050 [1.25] .091 [2.3] .110 [2.8] .125 [3.2]
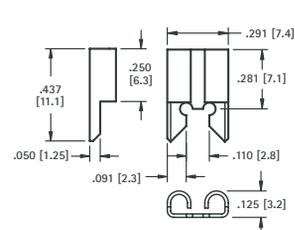
MATERIAL:
.016 (.41) thick Brass,
Tin Nickel Plate

CAT. NO.	ACCEPTS TAB
3528	.250 (6.4) × .032 (.80)

Mounting Detail
.200 [5.1]
.100 [2.5] DIA. (2) PLS

ACCEPTS .187 (4.8) TAB
VERTICAL ENTRY

.232 [5.9] .146 [3.7] .420 [10.7] .150 [3.8] .050 [1.25] .102 [2.6] .200 [5.1]
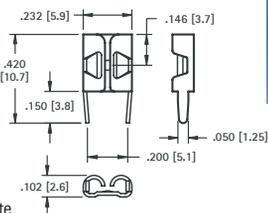
MATERIAL:
.016 (.41) thick
Brass, Tin Nickel Plate

CAT. NO.	ACCEPTS TAB
3548	.187 (4.8) × .020 (.50)
3551	.187 (4.8) × .032 (.80)

Mounting Detail
.200 [5.1]
.052 [1.30] DIA. (2) PLS

ACCEPTS ALL TABS
VERTICAL OR HORIZONTAL ENTRY

.150 [3.8] .185 [4.7] .400 [10.2] .150 [3.8] .062 [1.57] .027 [0.69] .134 [3.4] .130 [3.3]
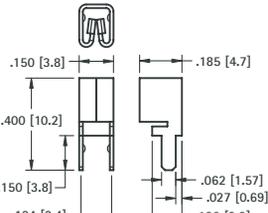
MATERIAL:
.016 (.41) thick Brass,
Tin Nickel Plate

CAT. NO.	ACCEPTS TAB
3557	.110 (2.8) to .250 (6.4) × .020 (.50) to .032 (.80)

UNIVERSAL QUICK-FIT TERMINAL

**Accepts all tabs
with vertical or horizontal entry**

Mounting Detail
.134 [3.4]
.067 [1.70] DIA. (2) PLS
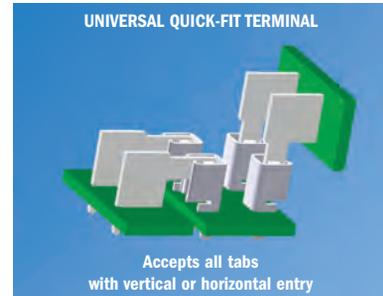
MULTI-PURPOSE HAND TOOL

• This Multi-purpose tool is all that is required to crimp wires into solderless terminals. Refer to pages 48 and 49.

Confined trapezoid-type crimping dies for insulated terminals

Indentor-type crimping die for non-insulated terminals
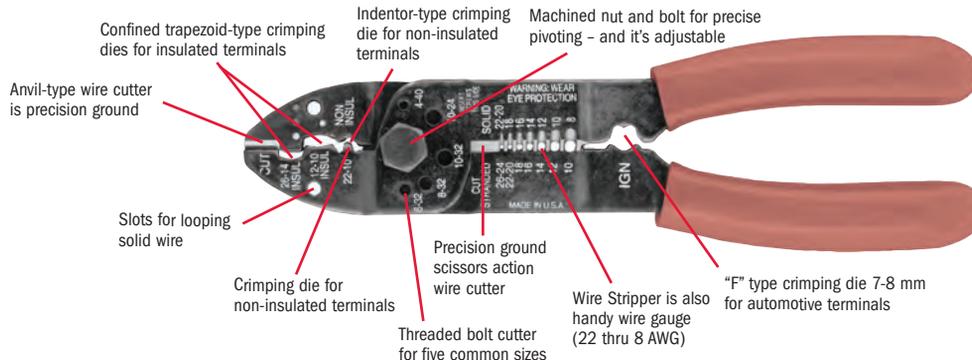
Machined nut and bolt for precise pivoting – and it's adjustable

Anvil-type wire cutter is precision ground

Slots for looping solid wire

Crimping die for non-insulated terminals

Precision ground scissors action wire cutter

Threaded bolt cutter for five common sizes

Wire Stripper is also handy wire gauge (22 thru 8 AWG)

"F" type crimping die 7-8 mm for automotive terminals

CAT. NO. 1345

Tel (718) 956-8900 • Fax (718) 956-9040
(800) 221-5510 • kec@keyelco.com

KEYSTONE®
RoHS COMPLIANT ~ ISO 9001 CERTIFIED

www.keyelco.com
31-07 20th Road – Astoria, NY 11105-2017

47