




RM 6
RM 6

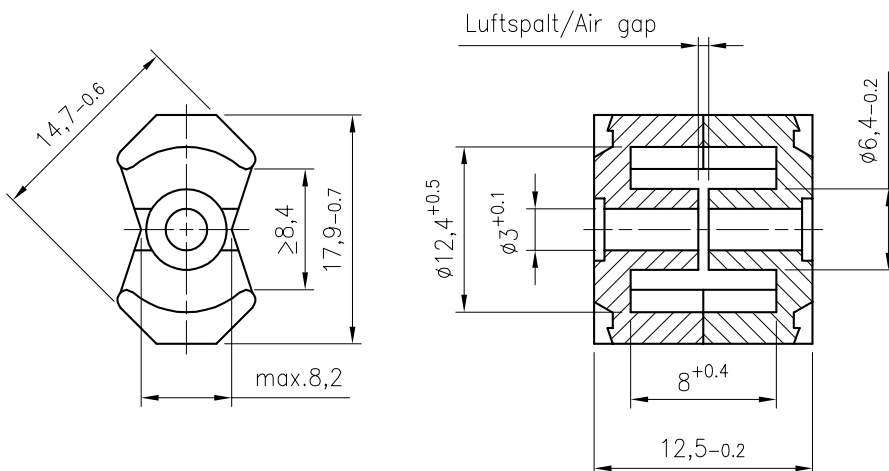

157

Magn. Formkenngrößen/Satz / eff. magn. parameters/set

Formfaktor / core factor	C_1	=	0,86	mm ⁻¹
Eff. magn. Weglänge / eff. magn. path length	l_e	=	26,9	mm
Eff. magn. Querschnitt / eff. magn. cross section	A_e	=	31,3	mm ²
Min. Kernquerschnitt / min. cross section	A_{min}	=	-	mm ²
Eff. magn. Volumen / eff. magn. volume	V_e	=	840	mm ³
Gewicht / weight	G	≈	4,0	g

A_L -Wert A_L value nH	Toleranz tolerance	Werkstoff material	Luftspalt airgap mm	μ_e	Bestellnummer order number
2200	± 25%	K 2005	-	≈ 1510	327 060000 025
2150	± 25%	K 2006	-	≈ 1470	327 060000 026
4000	± 25%	K 4000	-	≈ 2740	327 060000 004
400	± 10%	K 2005	≈ 0,07	≈ 275	327 060400 025
315	± 5%	K 2005	≈ 0,10	≈ 215	327 060315 025
250	± 3%	K 2005	≈ 0,14	≈ 170	327 060250 025

Zubehör accessory	Typ type	Bestellnummer code number
Halteklammer (2 Stück erforderlich) clamp (2 pieces necessary)	RM 6	700 000601 034
	RM 6 low profile	298 000000 375