
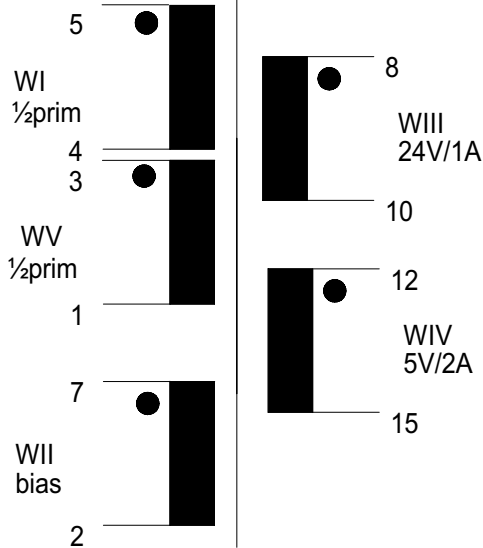


Technical Data Sheet

Customer:
Kaschke Göttingen

Part designation:
SP-EF 25

Customer part no.:
SKOP245-24-5-34

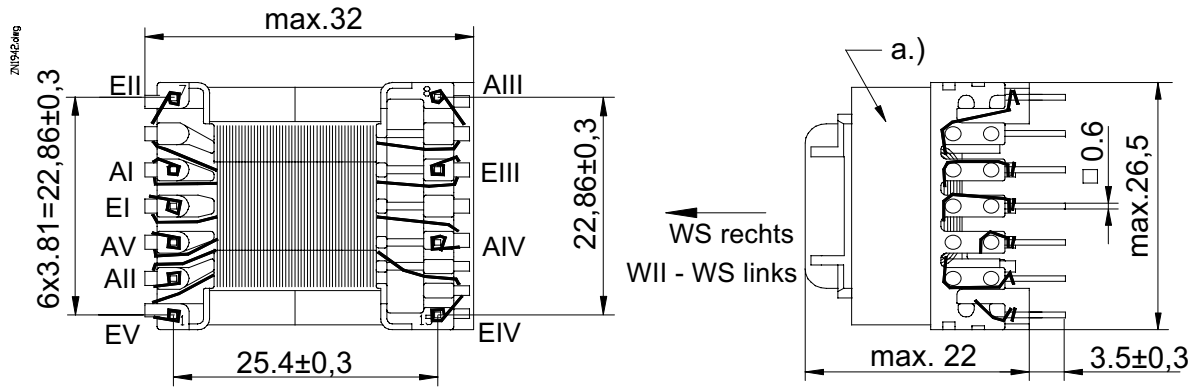

Core / material / air gap / AL	E25/7 K2006 or equiv.	
Nominal inductance	LI+LV = 504 µH ±10%	
maximum transmissible power	34W	
Working frequency	132 kHz	
Transformation ratio	1:021:0,40:0,093:1	
dielctric strength (50Hz/2s)	Prim-Sec = 3,75KV	
Nominal Current		
Design in comp. with standard	EN 61558	
Working / storage temperature	-25°C- 120°C	-25°C- 85°C
Miscellaneous	DIN 40040	

Remarks : **a.) marking**

Measuring device of L: **W&K 3245**

Measuring conditions of L: **50 mV/10 KHz**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person:
Uwe Dickhut

Date:
23.12.2004

Design regulation no.:
095.953

Index:
a

PLEASE GIVE US YOUR WRITTEN RELEASE

Date

Signature