



Technical Data Sheet

Customer:
Kaschke Göttingen

Part designation:
SP-E 20/6

Customer part no.:
SKNY268-18-13

gy/bv/zn1843.dwg

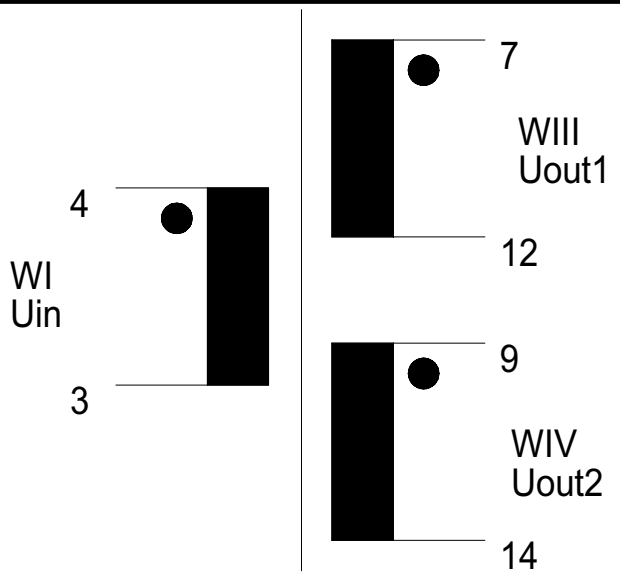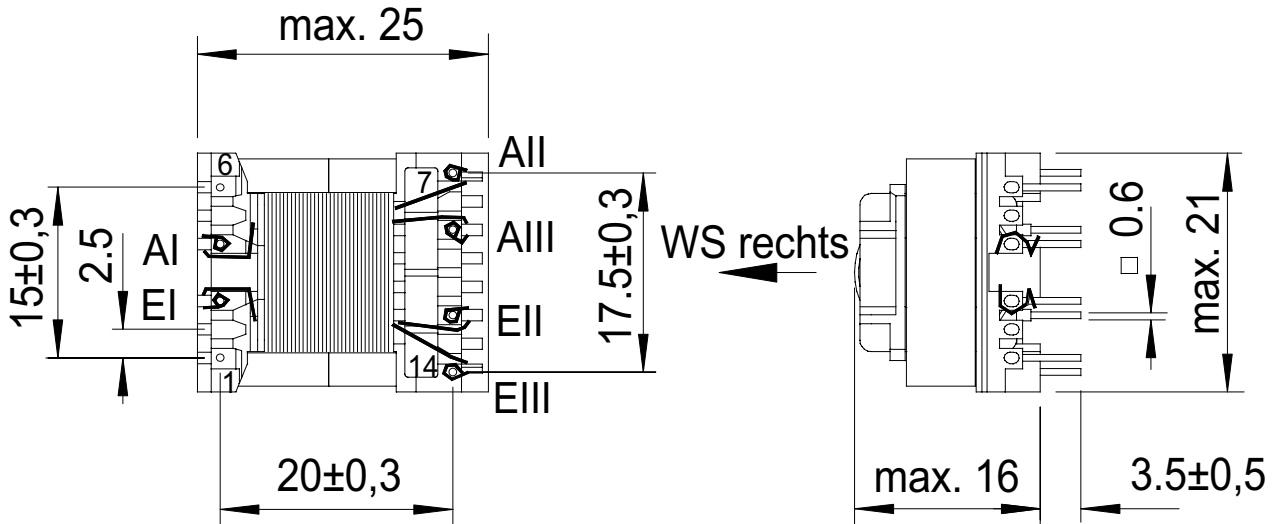

| | | |
|--------------------------------|-----------------------------------|--------------------|
| Core / material / air gap / AL | E20/6 K2006 or equiv | |
| Nominal inductance | LI = 1,20 mH ± 10% | |
| maximum transmissible power | | |
| Working frequency | 132 kHz | |
| Transformation ratio | 6,92:1:1 | |
| dielctric strength (50Hz/2s) | WI-WII/WIII = 4 KVeFF/50Hz | |
| Nominal Current | | |
| Design in comp. with standard | S08 EN60950 | |
| Working / storage temperature | -25°C- 115°C | -25°C- 85°C |
| Miscellaneous | F (DIN 40040) | |

Remarks : a.) marking

Measuring device of L: **W&K 3245**

Measuring conditions of L: **50 mV/10 KHz**

| Measured quantity | Unit | No. 1 | No. 2 | No. 3 | No. 4 | No. 5 |
|-------------------|------|-------|-------|-------|-------|-------|
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Responsible person:
Uwe Dickhut

Date:
..

Design regulation no:
094.943

Index:
a

PLEASE GIVE US YOUR WRITTEN RELEASE

Date Signature