

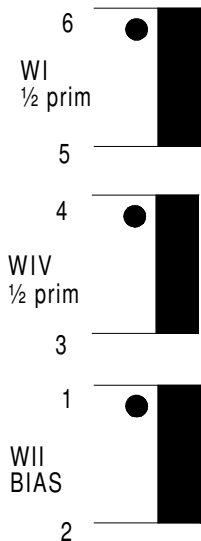


# Technical Data Sheet

Customer:  
**Kaschke Göttingen**

Part designation:  
**SP-E 36/11**

Customer part no.:  
**STOP247-15V-67W**

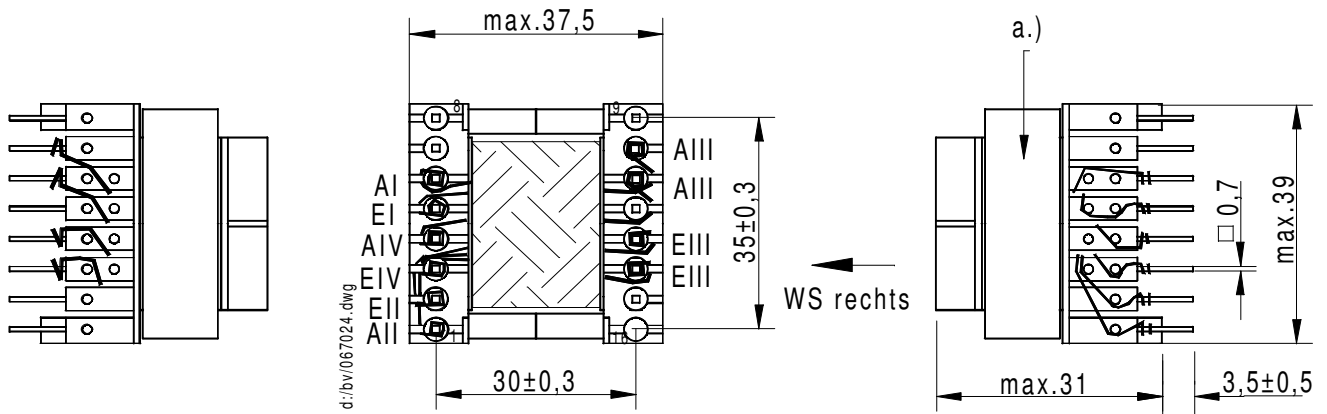

Core / material / air gap / AL	<b>E36/11 / K2006 or equiv. / 0,9</b>	
Nominal inductance	<b>LI+IV= 535 μH ±10%</b>	
maximum transmissible power	<b>67W (TOP247-230V)</b>	
Working frequency	<b>132kHz</b>	
Transformation ratio	<b>26:5:6:26</b>	
dielectric strength (50Hz/2s)	<b>3,75kV (WI/WII/WIV - WIII)</b>	
Nominal Current		
Design in comp. with standard	<b>I08</b>	
Working / storage temperature	<b>-25 °C- +115 °C</b>	<b>-25 °C- +85 °C</b>
Miscellaneous	<b>F (DIN 40040)</b>	
Lleak	<b>max.35μH</b>	

Remarks : **a.) marking**

Measuring device of L: **W&K 3260A**

Measuring conditions of L: **50mV/10kHz/22,5 °C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person:  
**Uwe Dickhut**

Date:  
**21.06.2007**

Design regulation no.:  
**067.043**

Index:  
**00**

**PLEASE GIVE US YOUR WRITTEN RELEASE**

Date

Signature