
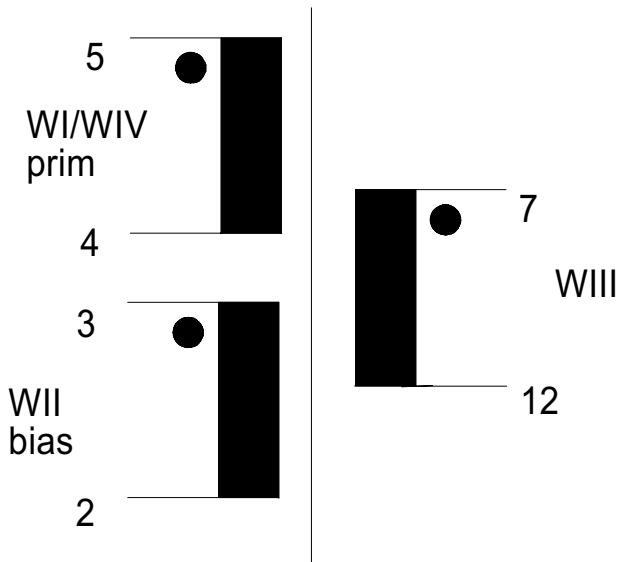


Technical Data Sheet

Customer:
Kaschke Göttingen

Part designation:
SP-E 30/7

Customer part no.:
SKOP244-24-48

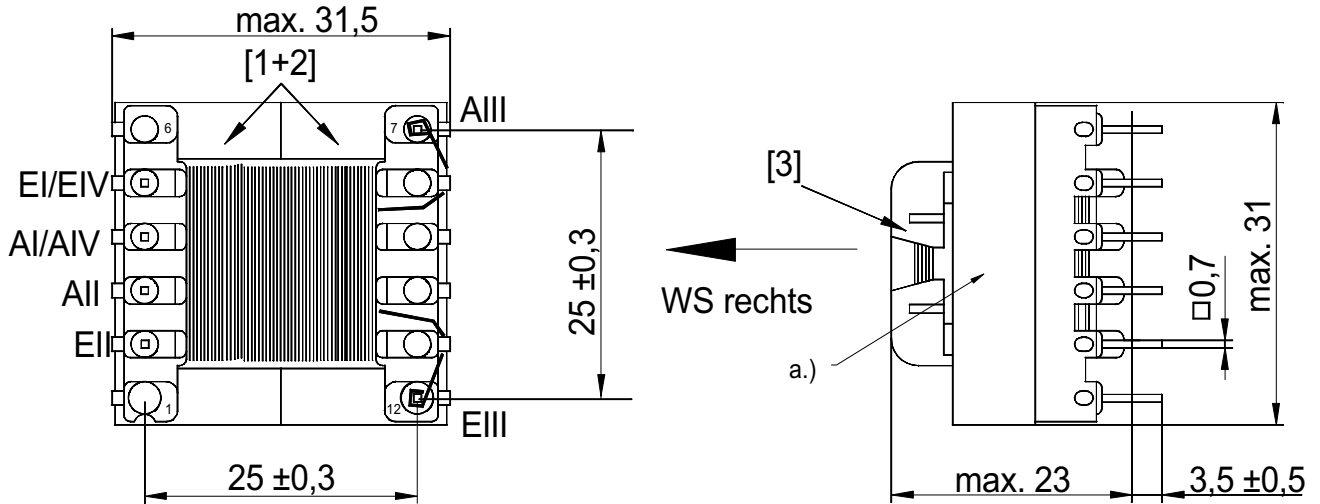

Core / material / air gap / AL	E30/7 / K2006 or equiv.	
Nominal inductance	LI= 320µH ±10%	
maximum transmissible power	50W	
Working frequency	132kHz	
Transformation ratio	46:5:9:46	
dielctric strength (50Hz/2s)	Prim-Sec = 3,75kV/50Hz/1sec	
Nominal Current		
Design in comp. with standard	.	
Working / storage temperature	-25°C- +115°C	-25°C- +85°C
Miscellaneous	F (DIN 40040)	
leakage inductance	max. 8µH	

Remarks : **a.) marking parallel split primary**

Measuring device of L: **W&K 3260A** Measuring conditions of L: **50mV/10kHz/25°C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person: **Uwe Dickhut** Date: **19.06.2006** Design regulation no: **066.930** Index: **a**

PLEASE GIVE US YOUR WRITTEN RELEASE
Date Signature