PRODUCT DATASHEET C17086_STRADELLA-16-T4

STRADELLA-16-T4

IESNA Type IV for wider roads and area lighting like car parks and yards.

SPECIFICATION:

Dimensions 49.5 x 49.5 mm 5.3 mm Height Fastening pin, screw yes 🕕 **ROHS** compliant



MATERIALS:

Component **Type** Material Colour **Finish** STRADELLA-16-T4 Multi-lens **PMMA** clear


ORDERING INFORMATION:

Component Qty in box MOQ MPQ Box weight (kg) C17086_STRADELLA-16-T4 800 160 160 5.8

» Box size: 480 x 280 x 300 mm



PRODUCT DATASHEET C17086_STRADELLA-16-T4

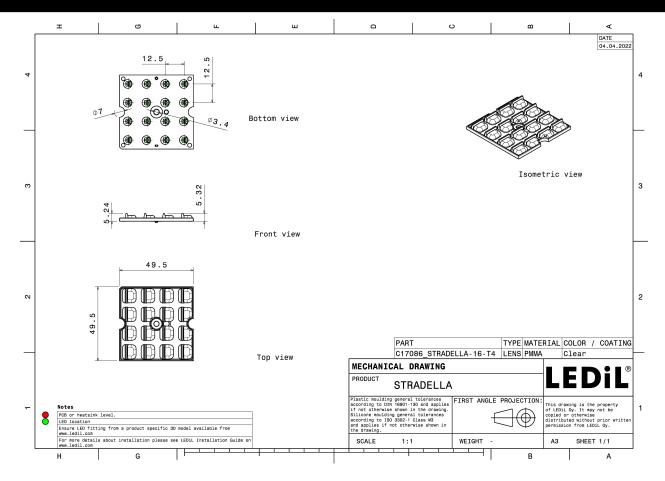

See also our general installation guide: www.ledil.com/installation_guide




OPTICAL RESULTS (MEASURED):



LED J Series 3030 FWHM / FWTM Asymmetric Efficiency 94 %

Peak intensity 0.5 cd/lm LEDs/each optic

Light colour White Required components:




ELECTRIO DEM LED & HEATSHIK COMPANY

LED EHP-223.5x50-1604-xx-70-LS30-06-NTC

FWHM / FWTM Asymmetric Efficiency 95 % Peak intensity 0.5 cd/lm LEDs/each optic 1 White

Light colour Required components:




LUMILEDS

Required components:

LED LUXEON 3030 2D (Round LES)

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 81 % Peak intensity 0.5 cd/lm LEDs/each optic Light colour White

Protective plate, glass



3/10



bridgelux

LED CSP 2727 (BXCP)
FWHM / FWTM Asymmetric
Efficiency 90 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1

Light colour White Required components:


300

bridgelux

LED CSP 2727 (BXCP)
FWHM / FWTM Asymmetric
Efficiency 75 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White

Required components:

Protective plate, glass




LUMILEDS

LED LUXEON 2835 Line

FWHM / FWTM Asymmetric
Efficiency 73 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1

LEDs/each optic 1
Light colour White
Required components:

Protective plate, glass




LUMILEDS

LED LUXEON 2835 Line

FWHM / FWTM Asymmetric
Efficiency 89 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White

Required components:






LED LUXEON 3030 2D (Square LES)

FWHM / FWTM Asymmetric Efficiency 76 % Peak intensity 0.4 cd/lm LEDs/each optic Light colour White Required components:

Protective plate, glass




LUMILEDS

LED LUXEON 3030 HE Plus

FWHM / FWTM Asymmetric Efficiency 89 % Peak intensity 0.5 cd/lm LEDs/each optic 1 White Light colour

Required components:



WNICHIA


LED NF2W757G-MT (Tunable White)

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 76 % Peak intensity 0.4 cd/lm LEDs/each optic

Light colour Tunable White

Required components:

Protective plate, glass




WNICHIA

LED NF2W757G-MT (Tunable White)

FWHM / FWTM Asymmetric Efficiency 89 % Peak intensity 0.5 cd/lm LEDs/each optic

Tunable White Light colour

Required components:






White



LED NFSWE11A FWHM / FWTM Asymmetric Efficiency 87 % Peak intensity 0.8 cd/lm LEDs/each optic

Required components:




OSRAM

Light colour

OSCONIQ C 2424 LED FWHM / FWTM Asymmetric Efficiency 90 % Peak intensity 0.6 cd/lm LEDs/each optic 1 White Light colour


Required components:



OSRAM Opto Semiconductors

LED OSCONIQ C 2424 FWHM / FWTM Asymmetric Efficiency 76 % Peak intensity 0.4 cd/lm LEDs/each optic 1 Light colour White Required components:

Protective plate, glass




SAMSUNG

LH181B FWHM / FWTM Asymmetric 77 % Efficiency Peak intensity 0.4 cd/lm

LEDs/each optic White Light colour Required components:

Protective plate, glass






SAMSUNG

LED LM301B
FWHM / FWTM Asymmetric
Efficiency 89 %
Peak intensity 0.5 cd/lm

LEDs/each optic 1
Light colour White

Required components:




SAMSUNG

LED LM301B
FWHM / FWTM Asymmetric
Efficiency 76 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1

Protective plate, glass

Light colour White Required components:

lm series and the series are the series and the series are the ser




SAMSUNG

LED LM302D
FWHM / FWTM Asymmetric
Efficiency 75 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1

Required components:

Protective plate, glass

White



SEOUL SEMICONDUCTOR


Light colour

LED SEOUL DC 3030C
FWHM / FWTM Asymmetric


Efficiency 76 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White

Required components:

Protective plate, glass






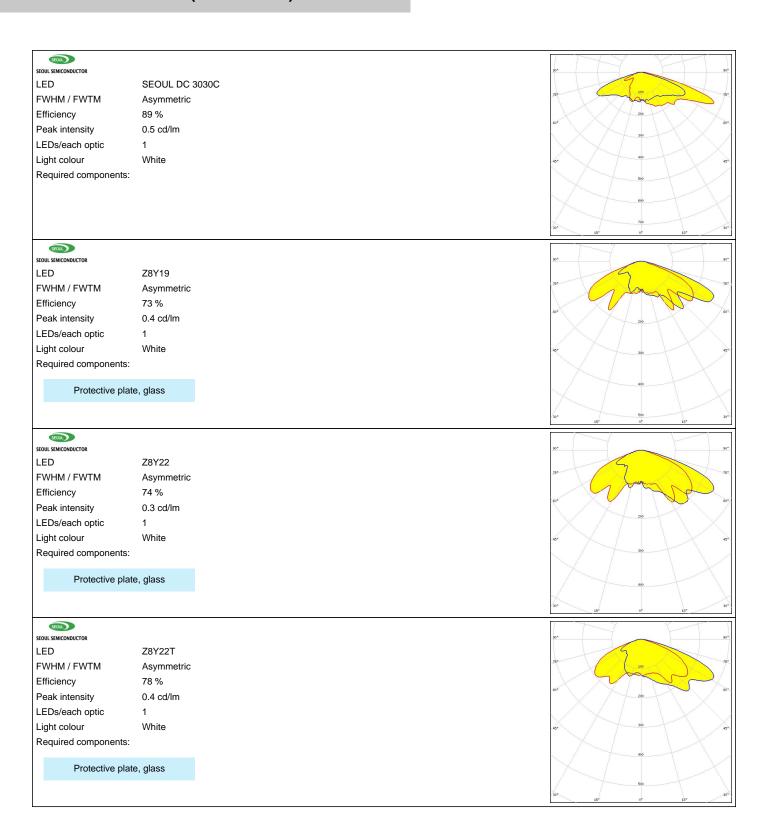





LED Z8Y22T
FWHM / FWTM Asymmetric
Efficiency 90 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:





PRODUCT DATASHEET C17086_STRADELLA-16-T4

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

10/10

www.ledil.com/ where_to_buy