# PRODUCT DATASHEET C14472\_MIRELLA-50-XW

## **MIRELLA-50-XW**

~80° wide beam

### **SPECIFICATION:**

Dimensions Ø 49.9
Height 23.9 mm
Fastening socket
ROHS compliant yes ①



## **MATERIALS:**

Component Type Material Colour Finish Coating

MIRELLA-50-XW Reflector HRPC white

### **ORDERING INFORMATION:**

» Box size: 480 x 280 x 300 mm


Component Qty in box MOQ MPQ Box weight (kg)

C14472\_MIRELLA-50-XW 336 112 28 2.9

Last update: 21/10/2024 Subject to change without prior notice Published: 03/05/2018



# PRODUCT DATASHEET C14472\_MIRELLA-50-XW

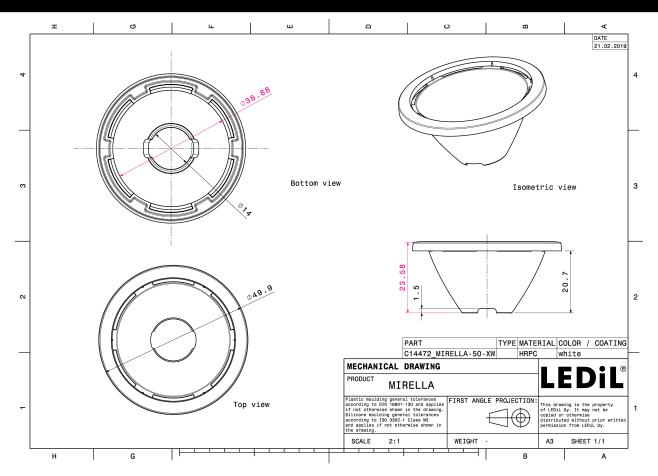

See also our general installation guide: <a href="www.ledil.com/installation\_guide">www.ledil.com/installation\_guide</a>




## **OPTICAL RESULTS (MEASURED):**

## **CITIZEN**

Required components:

LED CLL02x/CLU02x (LES10)

FWHM / FWTM 80.0° / 128.0°
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour/type White

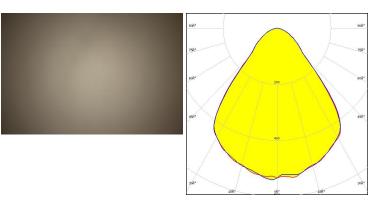

Light distribution files

## **CITIZEN**


LED CLU700/701/702/703

 FWHM / FWTM
 81.0° / 127.0°

 Efficiency
 93 %

 Peak intensity
 0.6 cd/lm

LEDs/each optic 1
Light colour/type White
Required components:

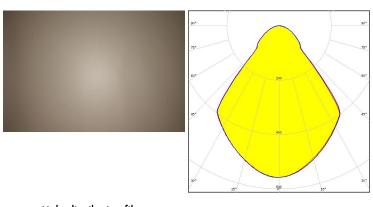


Light distribution files

# **CITIZEN**

LED CLU710/711 FWHM / FWTM 80.0° / 130.0°

Efficiency 94 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1

Light colour/type White Required components:

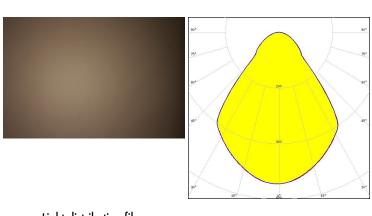

Light distribution files




## **OPTICAL RESULTS (MEASURED):**

## **CITIZEN**

LED CLU720/721/723 FWHM / FWTM 80.0° / 130.0°

Efficiency 93 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

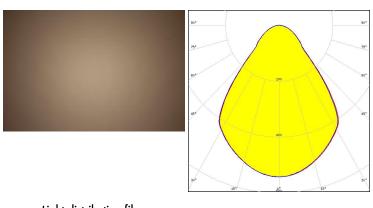

Light distribution files

Published: 03/05/2018

4/6




## **OPTICAL RESULTS (SIMULATED):**



LED Soleriq S9
FWHM / FWTM 77.0° / 117.0°
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:



Light distribution files

Published: 03/05/2018



# PRODUCT DATASHEET C14472\_MIRELLA-50-XW

#### **GENERAL INFORMATION:**

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

#### **MATERIALS:**

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### **LEDIL Oy**

Joensuunkatu 7 FI-24240 SALO Finland

#### LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

# Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

# Local sales and technical support

www.ledil.com/ where\_to\_buy

#### **Shipping locations**

Poznan, Poland Hong Kong, China

#### **Distribution Partners**

www.ledil.com/ where\_to\_buy