

(W/O COVER VIEW)





(N+2)×13.00

(N+1)×13.00

(N-1)×13.00

2×Ø 4.50(通孔)

2×Ø 8.00(孔深5.20)

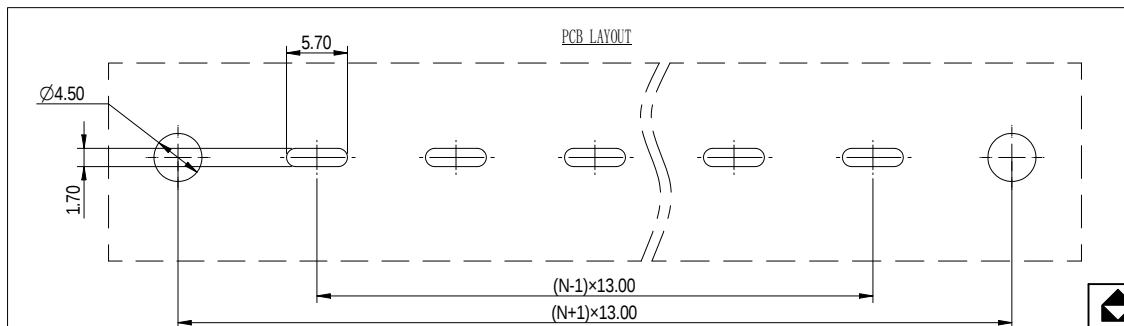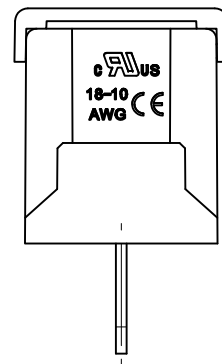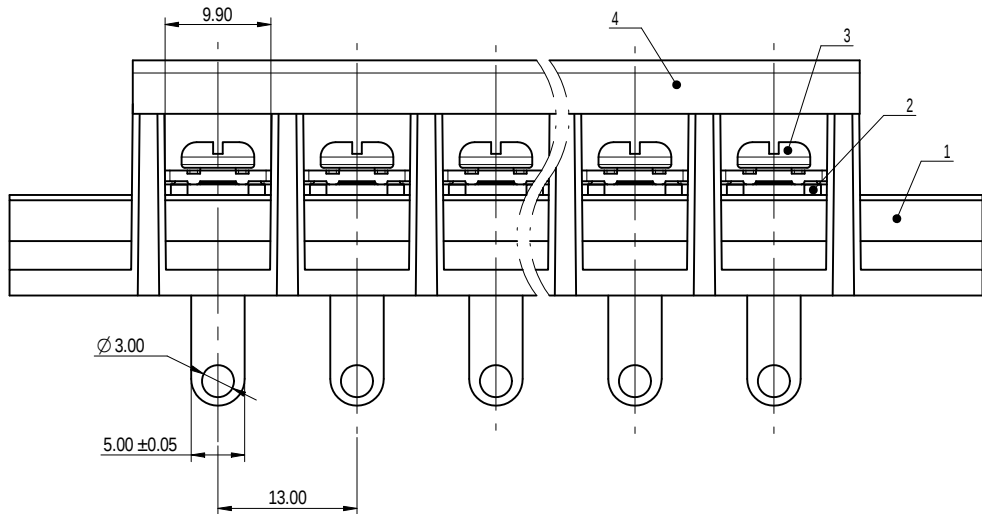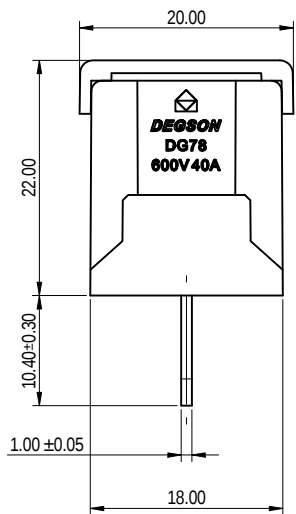

Note:The A&Z (H) in the name means:A(H) and Z(H).

4	Cover	PC	UL94V-2
3	Screw	Steel	Ni Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66+25%GF	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电压/Rated Voltage(V)/Current(A)		600/40	/ 600/10
螺钉扭矩/Torque Tightening(N·m/Lb·in)		M4 1.2/10.63	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG)		18~10	
间距/Pitch(mm)/线数范围/Poles		13.00/N=02~18P	
使用温度范围/Operating temperature(°C)		-30~+120	
符合RoHS环保要求/Conform to RoHS		Yes	

		MATERIAL:		SURFACE/COLOR:	
APPD: 蓝黄凡		MAT NO./REV:		MAT STATUS: 批量	
CHKD: 曹利彬		NAME:		DG78H-A-XXP-1Y-00A&Z(H)	
DFT: 姜民洁		DRAWING NO.		TYPE	
2023.07.06		200201286		CUSTOMER DRAWING	
2023.07.06		DRAWING STATUS		SCALE	
2023.07.06		已发布		1:1	
2023.07.06		SHEET		1/1	

00	ECN	DESCRIPTION	DFT	DATE
REV	ECN	DESCRIPTION	DFT	DATE

