

STRADELLA-8-HV-HB-O

Oval beam for high bay aisles. Variant with improved creepage distance for high voltage circuit design.

SPECIFICATION:

| | |
|----------------|-------------|
| Dimensions | 49.5 x 49.5 |
| Height | 8.2 mm |
| Fastening | pin, screw |
| ROHS compliant | yes ⓘ |




MATERIALS:

| Component | Type | Material | Colour | Finish | Length (mm) |
|---------------------|------------|----------|--------|--------|-------------|
| STRADELLA-8-HV-HB-O | Multi-lens | PMMA | clear | | |

ORDERING INFORMATION:

| Component | Qty in box | MOQ | MPQ | Box weight (kg) |
|--------------------------------------------------------------|------------|-----|-----|-----------------|
| C16118_STRADELLA-8-HV-HB-O » Box size: 476 x 273 x 292 mm | 800 | 160 | 160 | 6.1 |


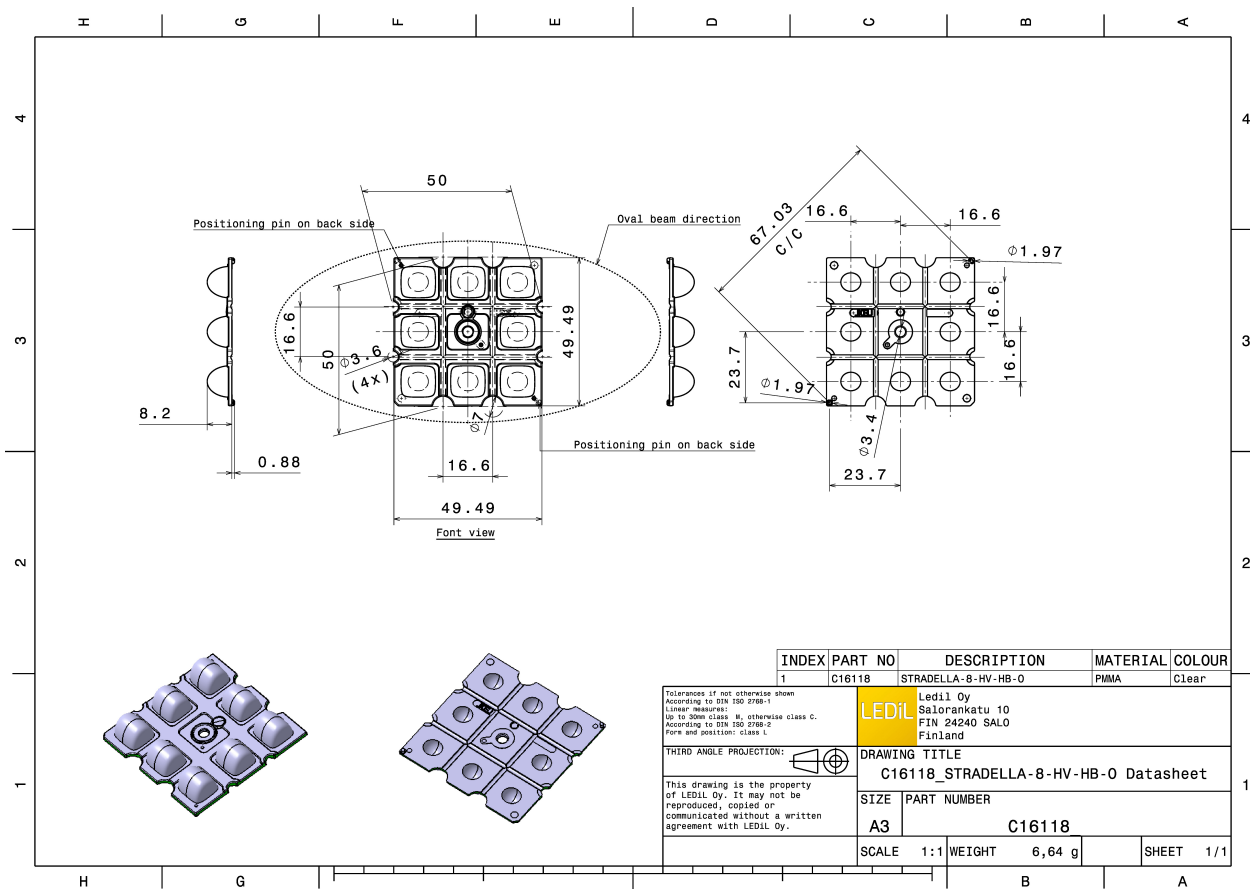


See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):





LED JB3030 HE B Class
 FWHM / FWTM 66.0 + 25.0° / 103.0 + 124.0°
 Efficiency 97 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

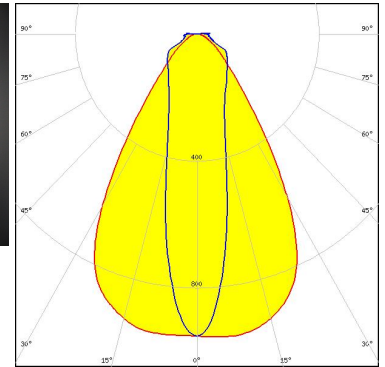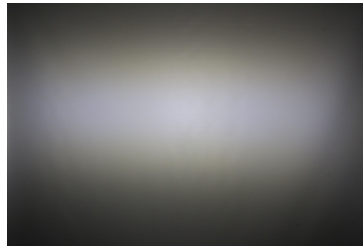

Light distribution files




LED XD16
 FWHM / FWTM 66.0 + 20.0° / 106.0 + 126.0°
 Efficiency 94 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

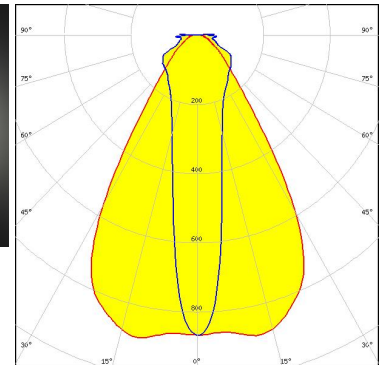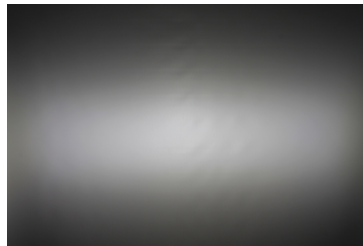

Light distribution files



LED XT-E
 FWHM / FWTM 68.0 + 22.0° / 108.0 + 126.0°
 Efficiency 94 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

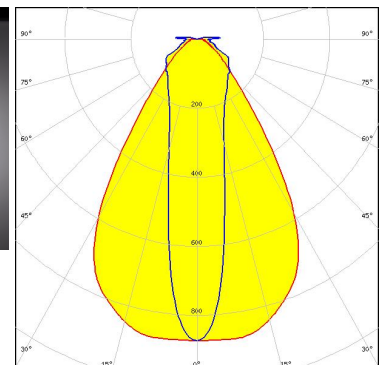


Light distribution files

OPTICAL RESULTS (MEASURED):

inventronics


| | |
|----------------------|-------------------------------|
| LED | PL-BRICK HP 3x8 Stradella-8 |
| FWHM / FWTM | 70.0 + 23.0° / 104.0 + 119.0° |
| Efficiency | 97 % |
| Peak intensity | 1 cd/lm |
| LEDs/each optic | 1 |
| Light colour/type | White |
| Required components: | |

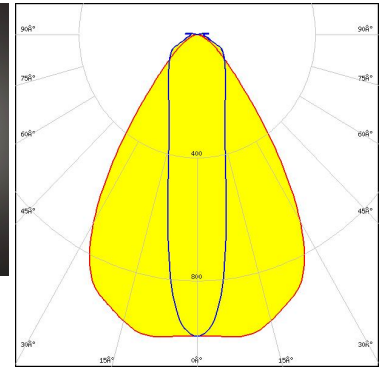

Light distribution files

LUMINUS



| | |
|----------------------|-------------------------------|
| LED | SST-10-B130 |
| FWHM / FWTM | 69.0 + 20.0° / 102.0 + 124.0° |
| Efficiency | 96 % |
| Peak intensity | 1 cd/lm |
| LEDs/each optic | 1 |
| Light colour/type | Deep Red |
| Required components: | |

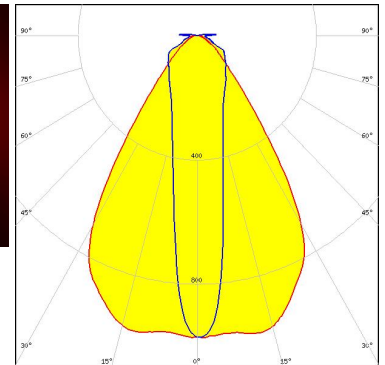

Light distribution files

NICHIA

| | |
|----------------------|-------------------------------|
| LED | NF2W585AR |
| FWHM / FWTM | 68.0 + 20.0° / 109.0 + 124.0° |
| Efficiency | 94 % |
| Peak intensity | 1 cd/lm |
| LEDs/each optic | 1 |
| Light colour/type | White |
| Required components: | |

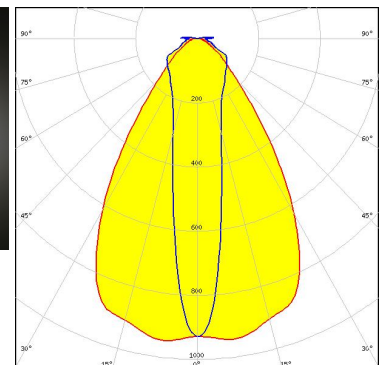
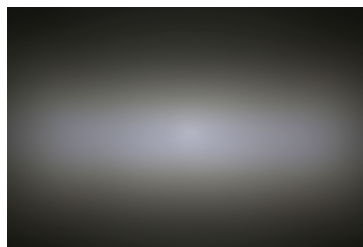


Light distribution files

OPTICAL RESULTS (MEASURED):

OSRAM
Opto Semiconductors



LED OSCONIQ S 3030 (QSLR31)
FWHM / FWTM 66.0 + 23.0° / 101.0 + 123.0°
Efficiency 94 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

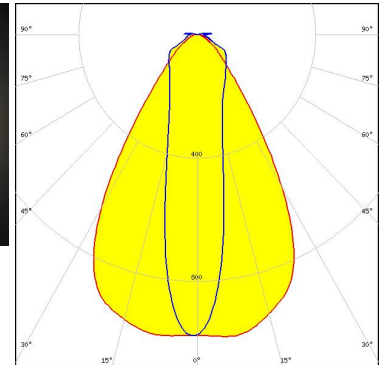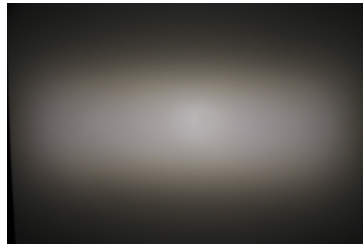

Light distribution files

PHILIPS



LED Fortimo FastFlex LED 4x8up PR G5
FWHM / FWTM 62.0 + 20.0° / 96.0 + 122.0°
Efficiency 94 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

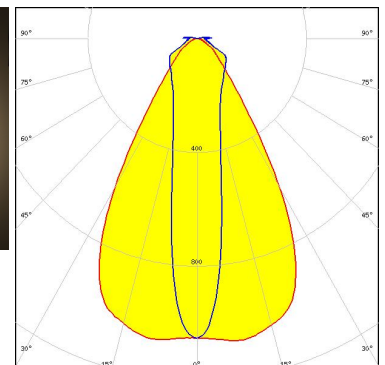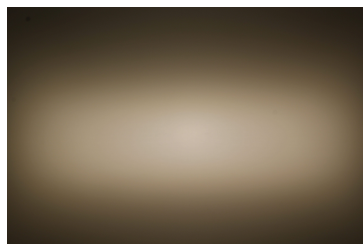

Light distribution files

SEOUL
SEOUL SEMICONDUCTOR

LED SEOUL DC 3030C
FWHM / FWTM 22.0 + 66.0° / 121.0 + 101.0°
Efficiency 94 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

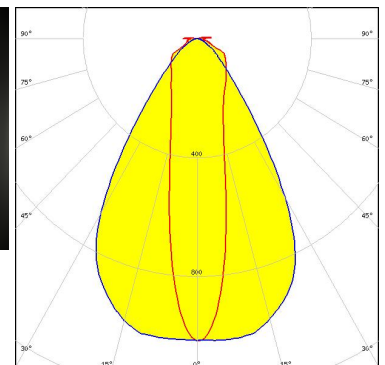
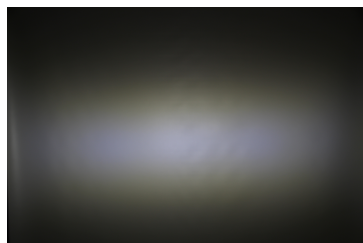


Light distribution files

OPTICAL RESULTS (MEASURED):

SEKIA
SEOUL SEMICONDUCTOR

LED Z5M3
FWHM / FWTM 70.0 + 26.0° / 112.0 + 127.0°
Efficiency 94 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

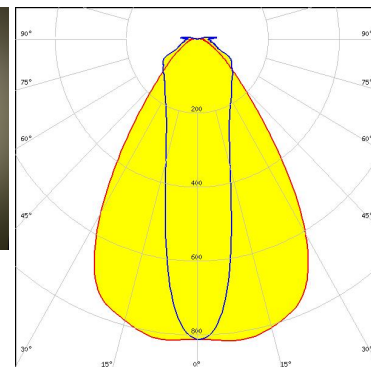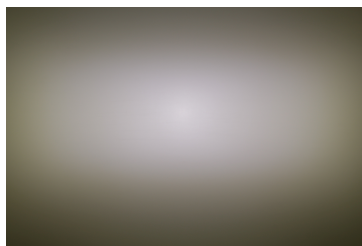


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XP-G2
 FWHM / FWTM 70.0 + 20.0° / 90.0 + 120.0°
 Efficiency 92 %
 Peak intensity 1.5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

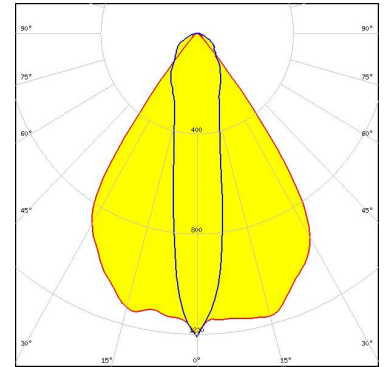

Light distribution files




LED XP-G2 HE
 FWHM / FWTM 72.0 + 24.0° / 94.0 + 106.0°
 Efficiency 95 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

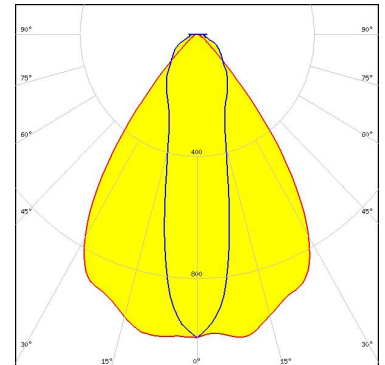

Light distribution files



LED XP-G3
 FWHM / FWTM 72.0 + 22.0° / 88.0 + 116.0°
 Efficiency 94 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

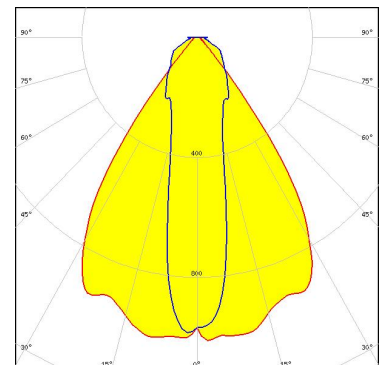

Light distribution files


OPTICAL RESULTS (SIMULATED):



LED XP-G3
 FWHM / FWTM 71.0 + 22.0° / 88.0 + 110.0°
 Efficiency 86 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:


Protective plate, glass

Light distribution files

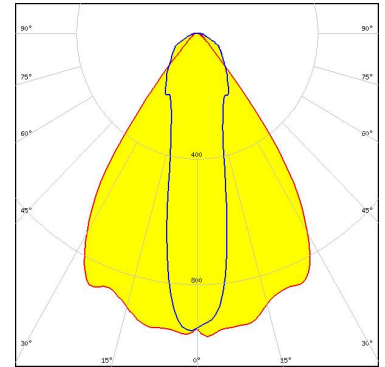

LED XP-G4
 FWHM / FWTM 70.0 + 20.0° / 82.0 + 93.0°
 Efficiency 96 %
 Peak intensity 1.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:


Light distribution files

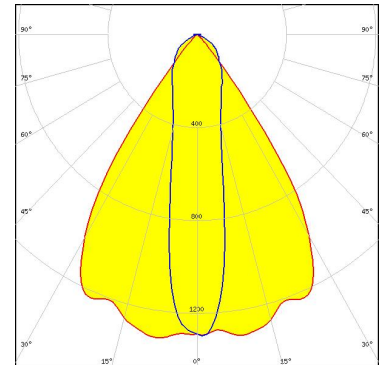

LED XP-G4
 FWHM / FWTM 68.0 + 22.0° / 84.0 + 92.0°
 Efficiency 88 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

Protective plate, glass


Light distribution files

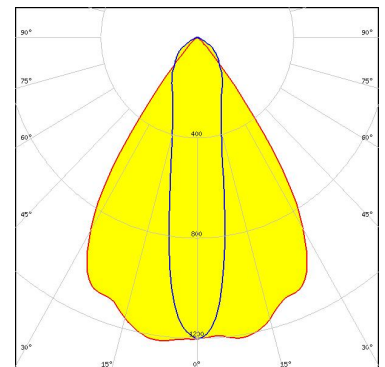

OPTICAL RESULTS (SIMULATED):





LED LUXEON 3030 2D (Round LES)
 FWHM / FWTM 61.0 + 17.0° / 80.0 + 78.0°
 Efficiency 93 %
 Peak intensity 1.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

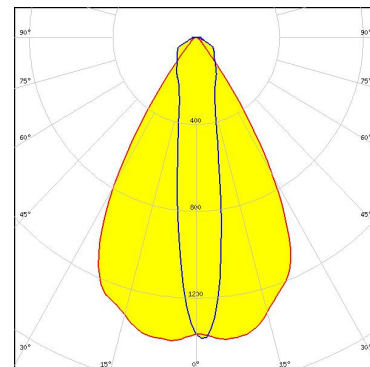

Light distribution files




LED SST-20 Gen2
 FWHM / FWTM 66.0 + 18.0° / 82.0 + 99.0°
 Efficiency 94 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

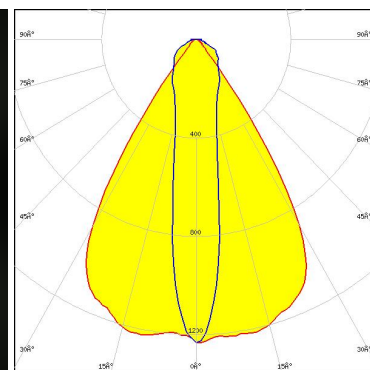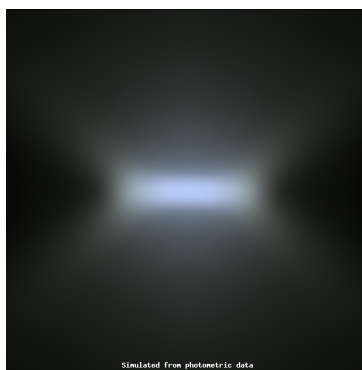

Light distribution files



LED SST-20 Gen2
 FWHM / FWTM 66.0 + 18.0° / 82.0 + 96.0°
 Efficiency 86 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

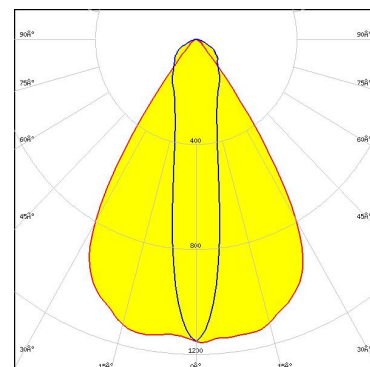


Protective plate, glass

Light distribution files

OPTICAL RESULTS (SIMULATED):




LED NVSW519A
 FWHM / FWTM 76.0 + 27.0° / 92.0 + 115.0°
 Efficiency 93 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

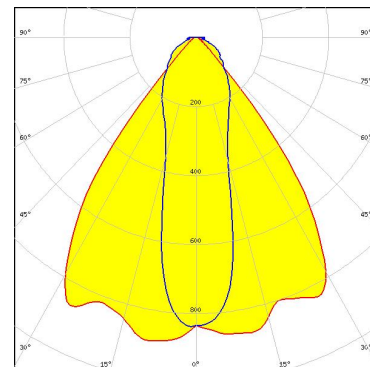

Light distribution files



LED NVSW519A
 FWHM / FWTM 76.0 + 28.0° / 94.0 + 111.0°
 Efficiency 88 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

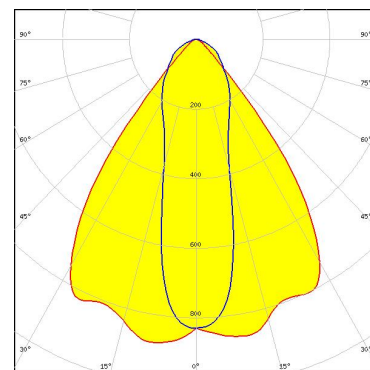


Light distribution files

Protective plate, glass



LED OSCONIQ C 2424 Gen1
 FWHM / FWTM 62.0 + 16.0° / 80.0 + 83.0°
 Efficiency 95 %
 Peak intensity 1.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

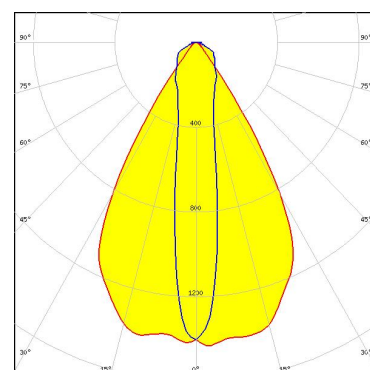


Light distribution files

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED OSCONIQ P 3030
FWHM / FWTM 53.0 + 14.0° / 77.0 + 59.0°
Efficiency 96 %
Peak intensity 2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

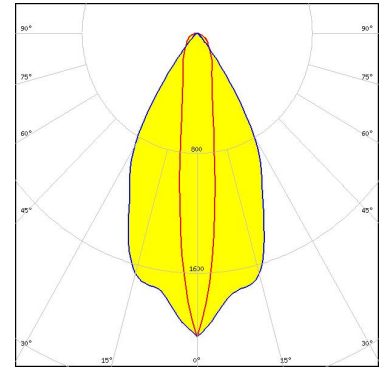

Light distribution files

OSRAM
Opto Semiconductors


LED OSLO Pure 1414
FWHM / FWTM 64.0 + 12.0° / 74.0 + 73.0°
Efficiency 95 %
Peak intensity 1.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

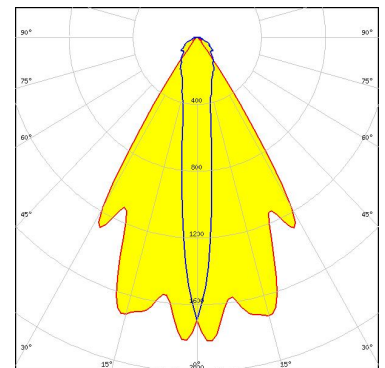

Light distribution files

OSRAM
Opto Semiconductors

LED OSLO Square CSSRM2/CSSRM3
FWHM / FWTM 64.0 + 18.0° / 83.0 + 86.0°
Efficiency 94 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

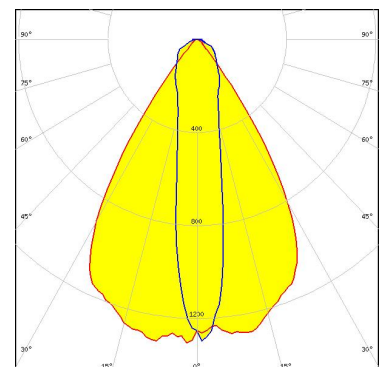

Light distribution files


OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3
FWHM / FWTM 66.0 + 20.0° / 86.0 + 87.0°
Efficiency 86 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

Protective plate, glass


Light distribution files

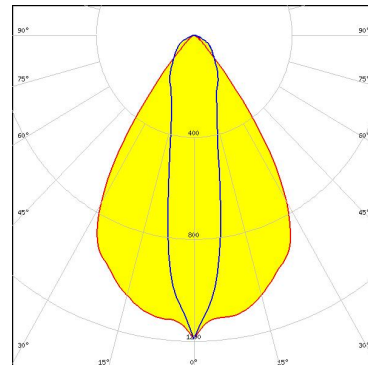

OSRAM
Opto Semiconductors

LED OSLON SSL 80 (True Green)
FWHM / FWTM 52.0 + 18.0° / 72.0 + 50.0°
Efficiency 95 %
Peak intensity 2.2 cd/lm
LEDs/each optic 1
Light colour/type True Green
Required components:

Light distribution files

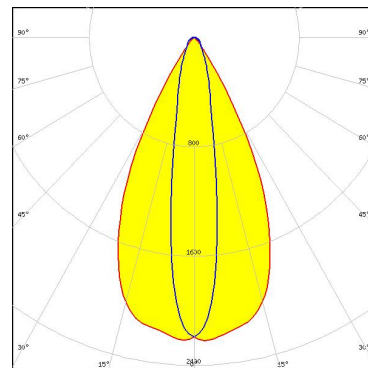


OSRAM
Opto Semiconductors

LED OSLON SSL 80 (True Green)
FWHM / FWTM 52.0 + 18.0° / 72.0 + 50.0°
Efficiency 89 %
Peak intensity 2.1 cd/lm
LEDs/each optic 1
Light colour/type True Green
Required components:

Protective plate, glass


Light distribution files

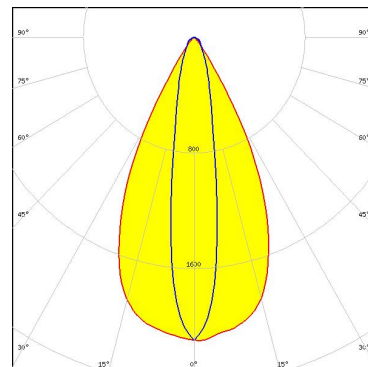

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED SFH 4715AS
FWHM / FWTM 52.0 + 14.0° / 68.0 + 46.0°
Efficiency 94 %
LEDs/each optic 1
Light colour/type IR
Required components:

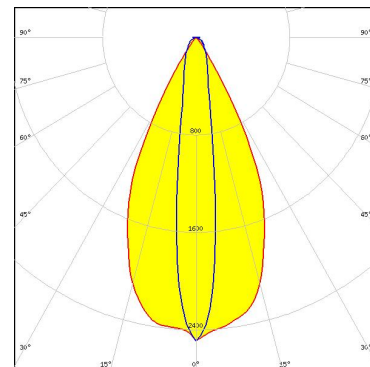

Light distribution files

SAMSUNG


LED LH181A
FWHM / FWTM 66.0 + 26.0° / 90.0 + 120.0°
Efficiency 92 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

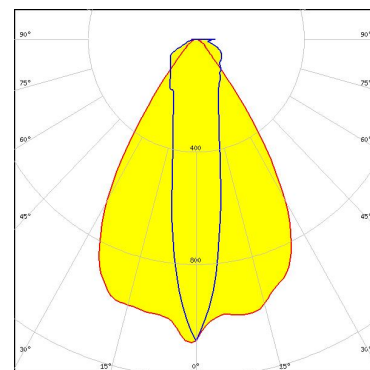

Light distribution files

SAMSUNG

LED LH181B
FWHM / FWTM 60.0 + 20.0° / 80.0 + 120.0°
Efficiency 94 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

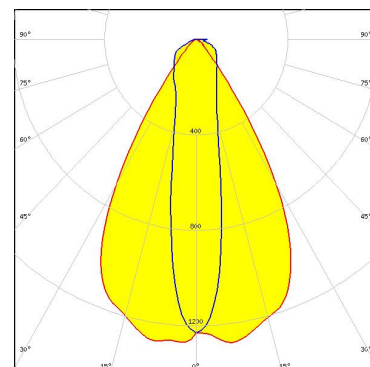

Light distribution files


OPTICAL RESULTS (SIMULATED):

SAMSUNG

LED LH351B
 FWHM / FWTM 68.0 + 22.0° / 88.0 + 95.0°
 Efficiency 88 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

Protective plate, glass


Light distribution files

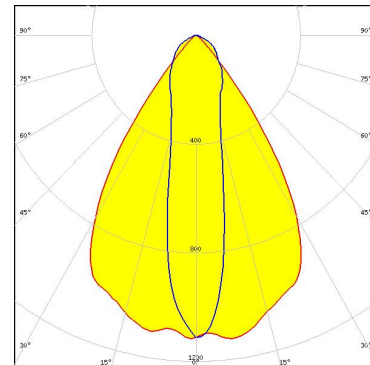

SAMSUNG


LED LH351B
 FWHM / FWTM 69.0 + 21.0° / 87.0 + 96.0°
 Efficiency 94 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

Light distribution files

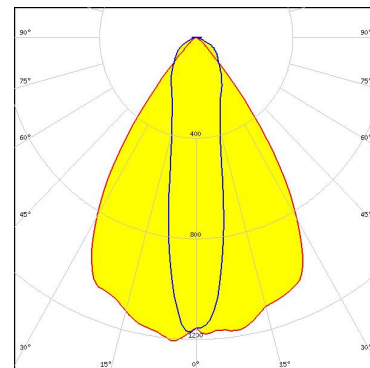

LED Z8Y22T
 FWHM / FWTM 63.0 + 21.0° / 82.0 + 103.0°
 Efficiency 94 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

Light distribution files

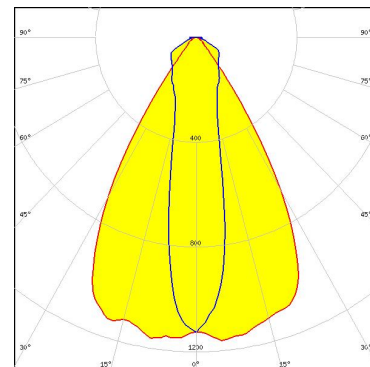

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 7
FI-24100 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Poznan, Poland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)