

## STRADA-2X2-DWC

Universal road lighting beam with excellent mixed illuminance and luminance uniformity. Typically IESNA Type III (medium).

## SPECIFICATION:

Dimensions	50.0 x 50.0
Height	6 mm
Fastening	glue, pin, screw
ROHS compliant	yes ⓘ




## MATERIALS:

Component	Type	Material	Colour	Finish	Length (mm)
STRADA-2X2-DWC	Multi-lens	PMMA	clear		

## ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C12362_STRADA-2X2-DWC » Box size: 480 x 280 x 300 mm	800	160	160	5.8


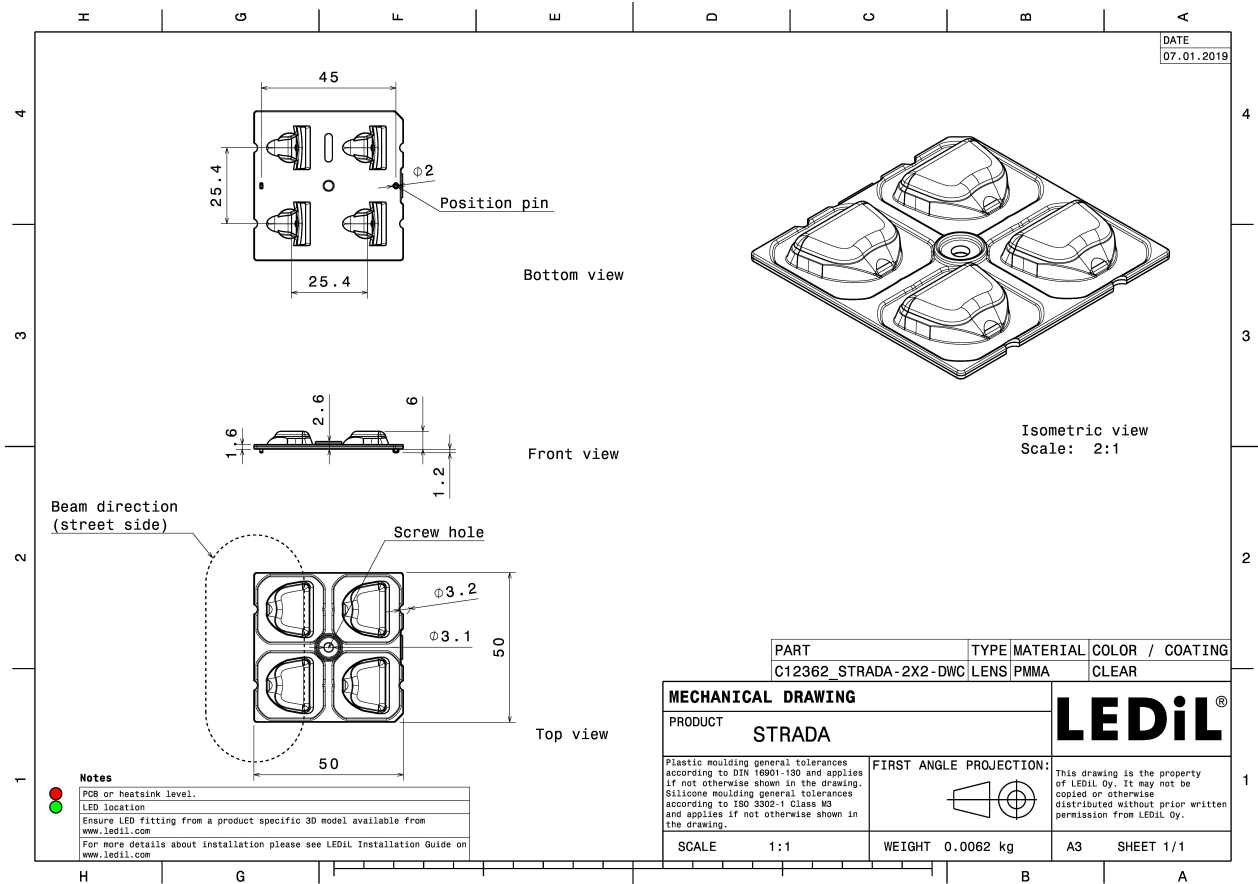


See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)

#### OPTICAL RESULTS (MEASURED):




LED Bridgelux SMD 5050  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

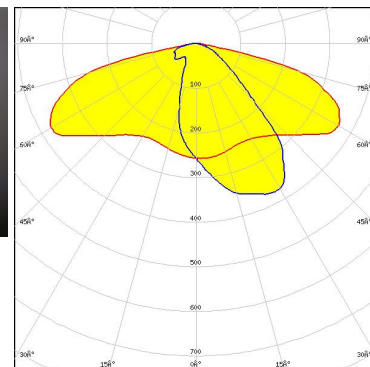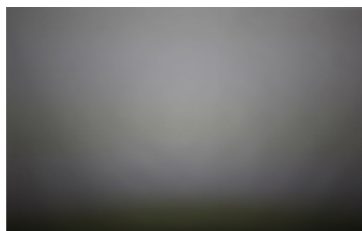

Light distribution files




LED QUICK FLUX XTP 2x4 xxx LS G5  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

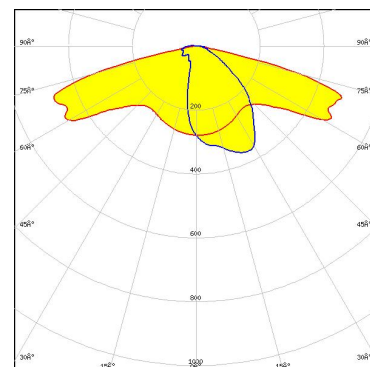

Light distribution files



LED QUICK FLUX XTP 2x6 xxx LS G5  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

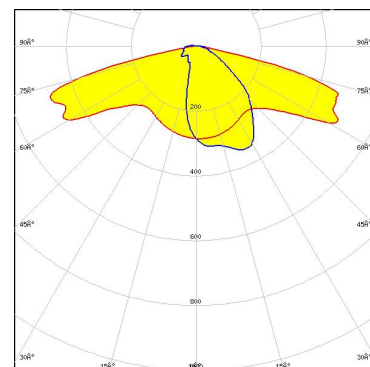


Light distribution files

#### OPTICAL RESULTS (MEASURED):




LED QUICK FLUX XTP 2x8 xxx LS G5  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

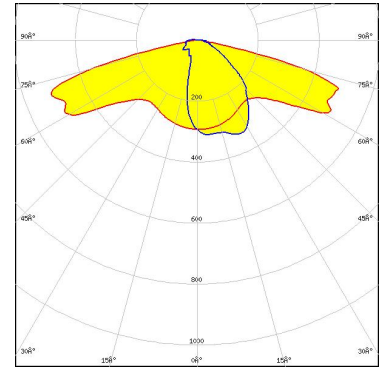

Light distribution files




LED XD16  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 4  
 Light colour/type White  
 Required components:

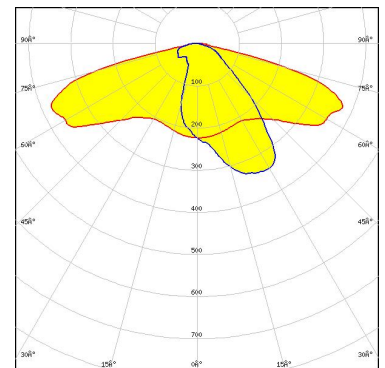

Light distribution files



LED XD16  
 FWHM / FWTM Asymmetric  
 Efficiency 93 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

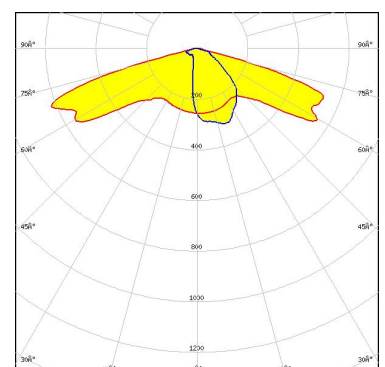


Light distribution files



#### OPTICAL RESULTS (MEASURED):



LED XHP35 HD  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

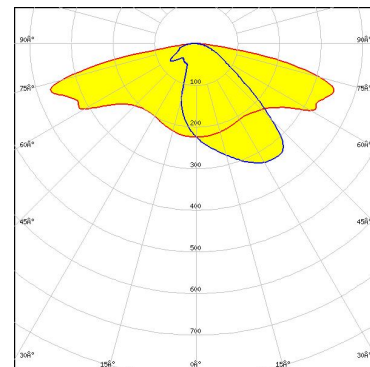

Light distribution files





LED XM-L  
 FWHM / FWTM Asymmetric  
 Efficiency 92 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Light distribution files



LED XM-L3  
 FWHM / FWTM Asymmetric  
 Efficiency 96 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

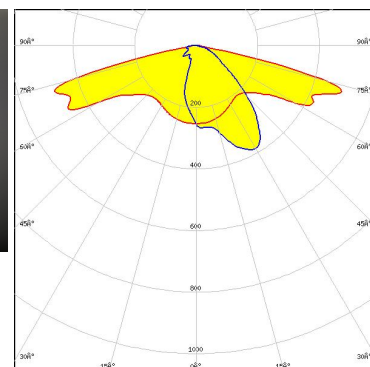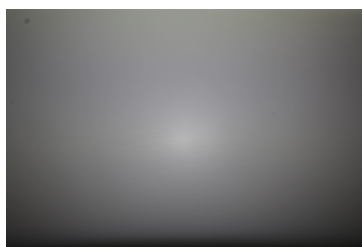

Light distribution files

#### OPTICAL RESULTS (MEASURED):




LED XP-G  
FWHM / FWTM Asymmetric  
Efficiency 93 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

Light distribution files




LED XP-G2  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

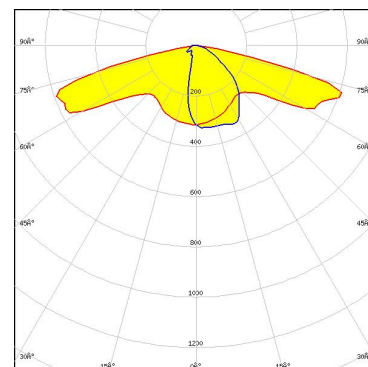

Light distribution files



LED XP-G3  
FWHM / FWTM Asymmetric  
Efficiency 91 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
C17580\_STRADA-2X2-SHD-WHT

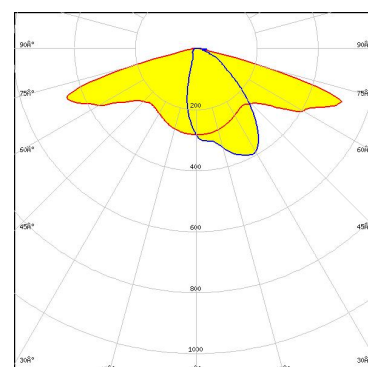


Light distribution files

#### OPTICAL RESULTS (MEASURED):




LED XP-G3  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

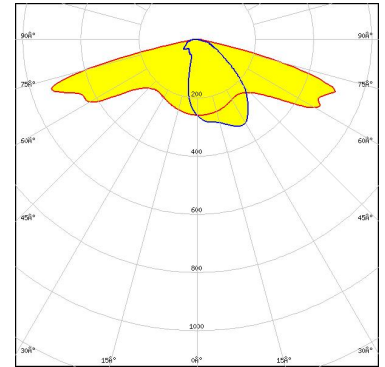

Light distribution files




LED XP-G3  
 FWHM / FWTM Asymmetric  
 Efficiency 82 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 C17677\_STRADA-2X2-SHD-BLK

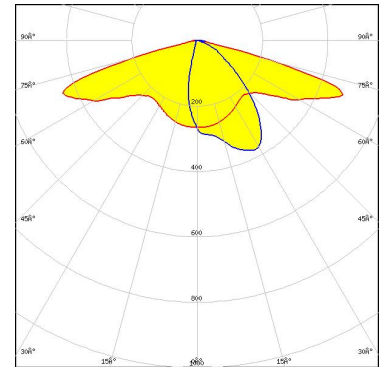

Light distribution files



LED XP-L HD  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

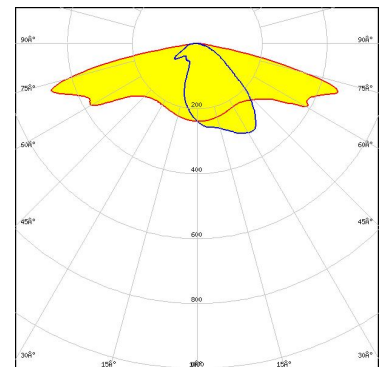


Light distribution files

#### OPTICAL RESULTS (MEASURED):




LED XP-L HI  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

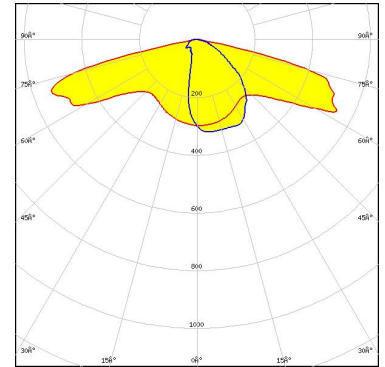

Light distribution files




LED XP-L2  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

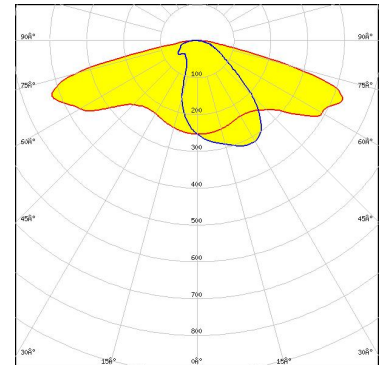

Light distribution files



LED XT-E  
 FWHM / FWTM Asymmetric  
 Efficiency 93 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

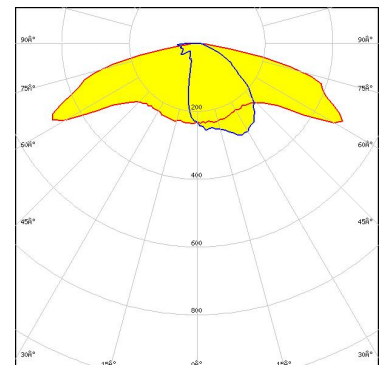


Light distribution files

#### OPTICAL RESULTS (MEASURED):




LED XT-E HVW  
FWHM / FWTM Asymmetric  
Efficiency %  
LEDs/each optic 1  
Light colour/type White  
Required components:

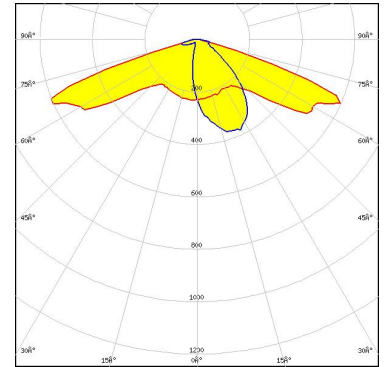

Light distribution files




LED EHP-2x8-3535  
FWHM / FWTM Asymmetric  
Efficiency 97 %  
Peak intensity 0.5 cd/m²  
LEDs/each optic 1  
Light colour/type White  
Required components:

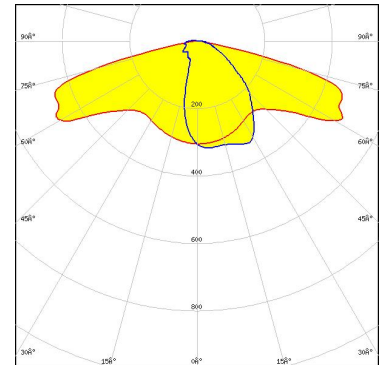

Light distribution files



LED EHP-2x8-5050  
FWHM / FWTM Asymmetric  
Efficiency 97 %  
Peak intensity 0.4 cd/m²  
LEDs/each optic 1  
Light colour/type White  
Required components:

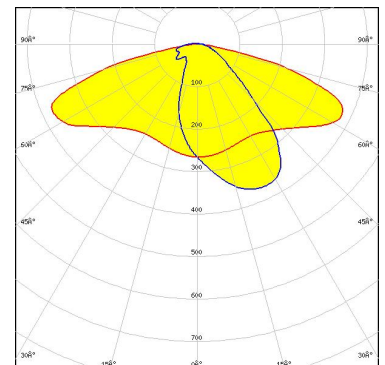


Light distribution files

#### OPTICAL RESULTS (MEASURED):

##### inventronics


LED	PL-BRICK HP 3800 2x8 SSG
FWHM / FWTM	Asymmetric
Efficiency	95 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

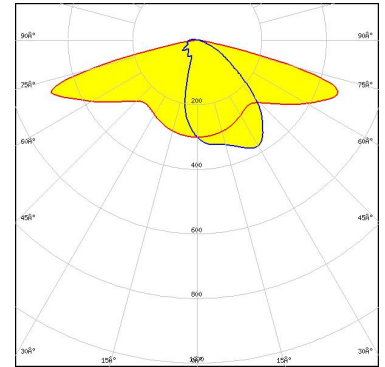

Light distribution files

##### inventronics


LED	PrevaLED Brick HP 2x8
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

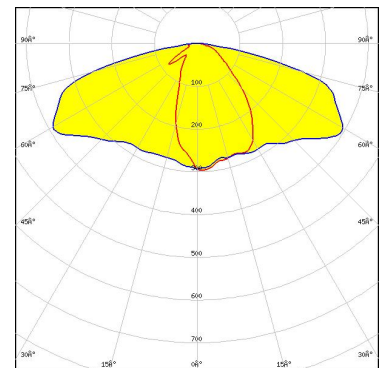

Light distribution files

##### LUMILEDS

LED	LUXEON 5050 Round LES
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

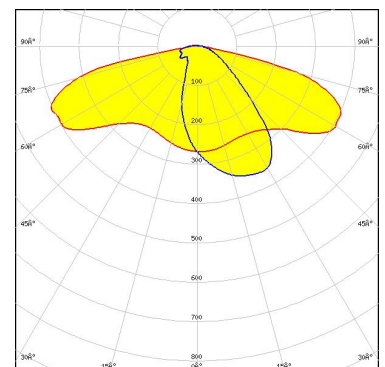


Light distribution files

#### OPTICAL RESULTS (MEASURED):




LED LUXEON MZ  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

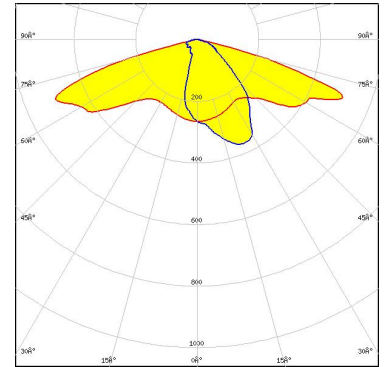

Light distribution files




LED LUXEON Q  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

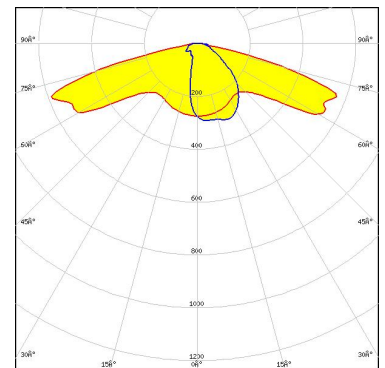

Light distribution files



LED LUXEON Rebel ES  
FWHM / FWTM Asymmetric  
Efficiency 93 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

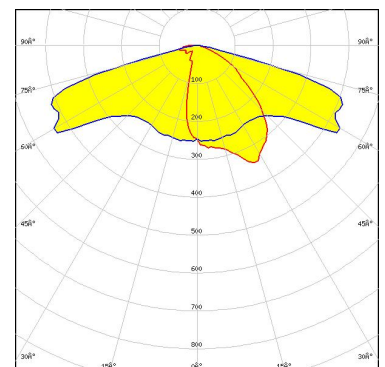


Light distribution files

#### OPTICAL RESULTS (MEASURED):




LED LUXEON T  
FWHM / FWTM Asymmetric  
Efficiency 93 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

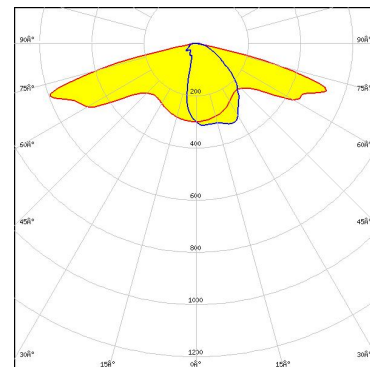

Light distribution files





LED LUXEON TX  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

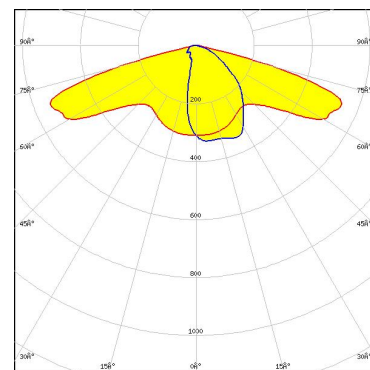

Light distribution files



LED LUXEON V  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

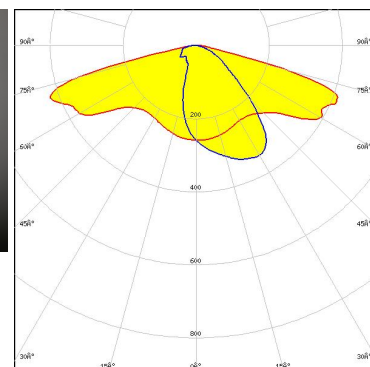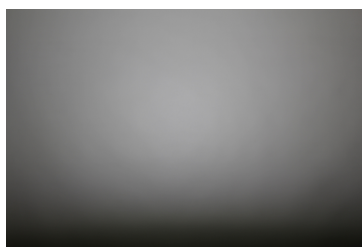


Light distribution files



#### OPTICAL RESULTS (MEASURED):




LED LUXEON V2  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

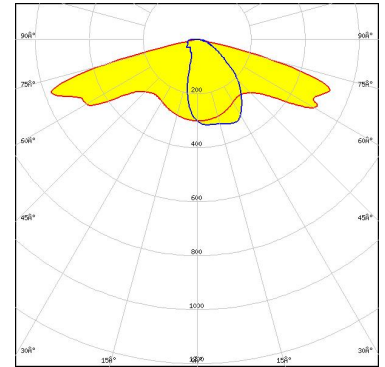

Light distribution files




LED RecLED 122x50mm 1900lm 730 2x4 Opt G1  
FWHM / FWTM Asymmetric  
Efficiency 97 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

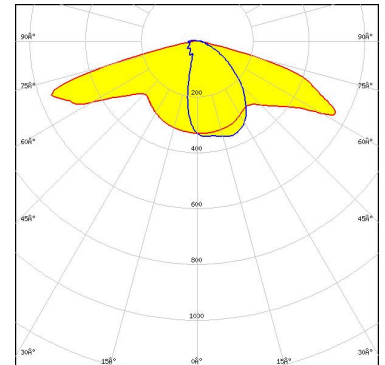

Light distribution files



LED NS9x383  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

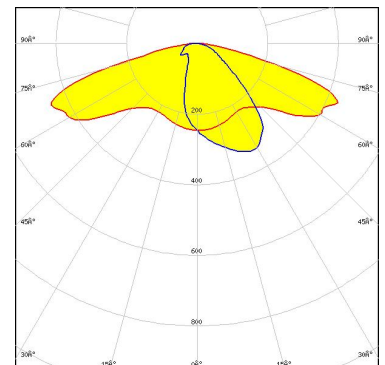


Light distribution files

#### OPTICAL RESULTS (MEASURED):




LED NVSW219D  
 FWHM / FWTM Asymmetric  
 Efficiency 86 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

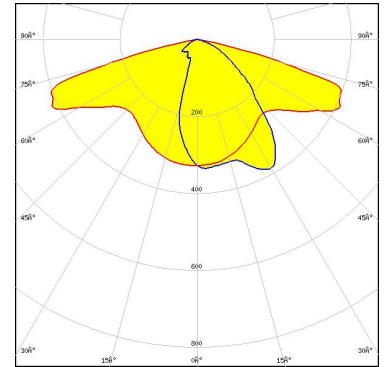

Light distribution files




LED NVSW219D  
 FWHM / FWTM Asymmetric  
 Efficiency 96 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

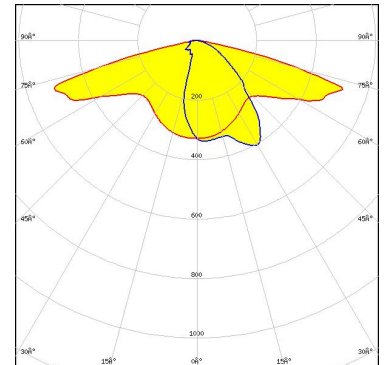

Light distribution files



LED NVSW319B  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

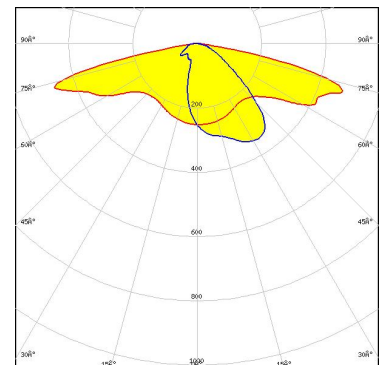


Light distribution files

#### OPTICAL RESULTS (MEASURED):




LED NVSW3x9A  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

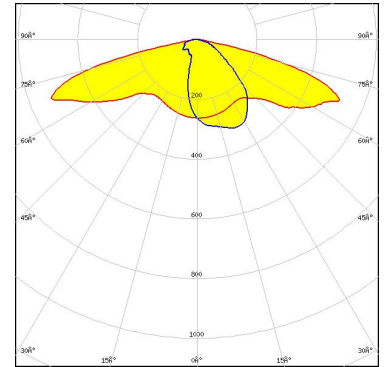

Light distribution files




LED NVSxE21A  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

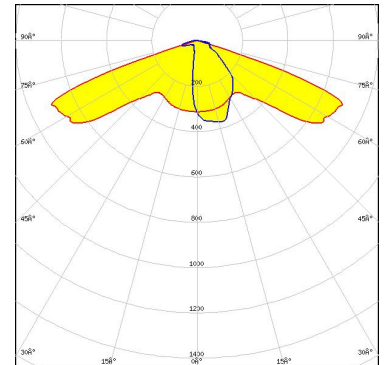

Light distribution files



LED NVSxx19B/NVSxx19C  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

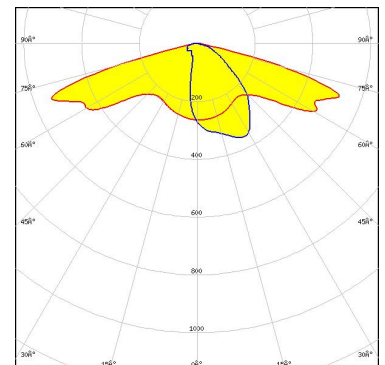


Light distribution files

#### OPTICAL RESULTS (MEASURED):




LED NWSx229A  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

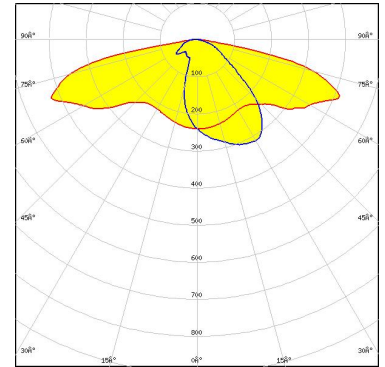

Light distribution files




LED Duris S8  
 FWHM / FWTM Asymmetric  
 Efficiency 97 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

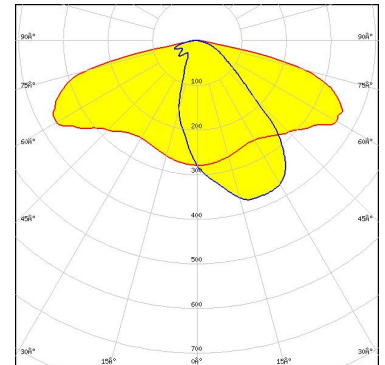

Light distribution files



LED Duris S8  
 FWHM / FWTM Asymmetric  
 Efficiency 88 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

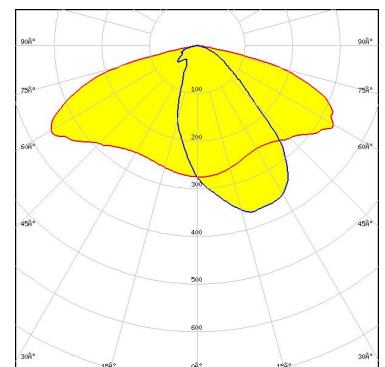


Protective plate, glass

Light distribution files

#### OPTICAL RESULTS (MEASURED):

**OSRAM**  
Opto Semiconductors


LED OSLON Square CSSRM2/CSSRM3  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

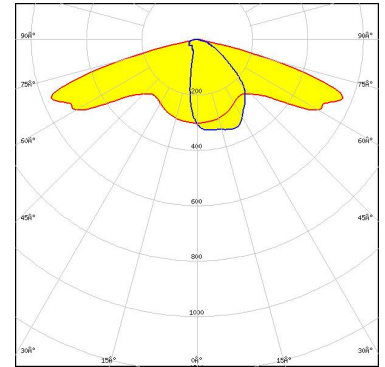

Light distribution files

**OSRAM**  
Opto Semiconductors


LED OSLON Square PC  
FWHM / FWTM Asymmetric  
Efficiency 92 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

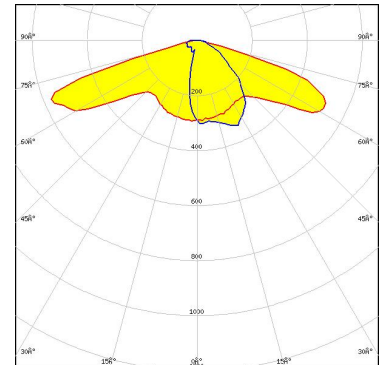

Light distribution files

**OSRAM**  
Opto Semiconductors

LED OSLON Square PC  
FWHM / FWTM Asymmetric  
Efficiency 85 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

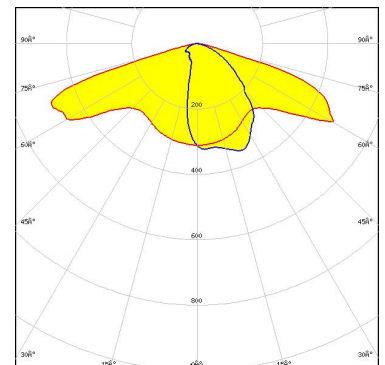


Protective plate, glass

Light distribution files

#### OPTICAL RESULTS (MEASURED):

### PHILIPS


LED	Fortimo FastFlex LED 2x8 DA G4
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

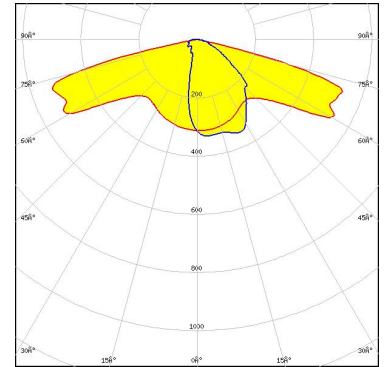

Light distribution files

### PHILIPS


LED	Fortimo FastFlex LED 2x8 DA G4+
FWHM / FWTM	Asymmetric
Efficiency	97 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

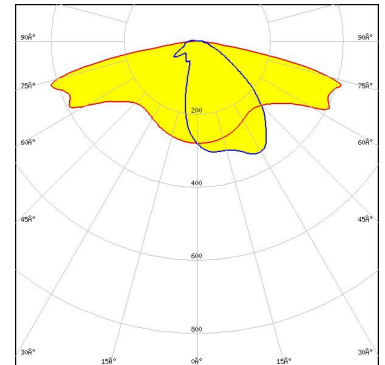

Light distribution files

### PHILIPS

LED	Fortimo FastFlex LED 2x8 DA G5
FWHM / FWTM	Asymmetric
Efficiency	96 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

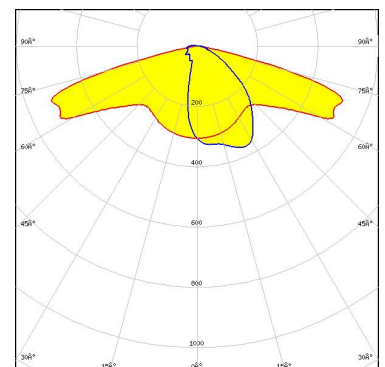


Light distribution files

#### OPTICAL RESULTS (MEASURED):

#### PHILIPS


LED Fortimo FastFlex LED 2x8 DAX G4  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

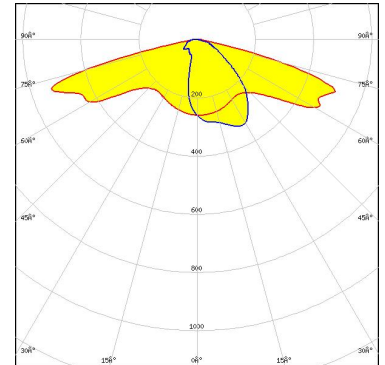

Light distribution files

#### SAMSUNG


LED HiLOM RC12 Z (LH181B)  
 FWHM / FWTM Asymmetric  
 Efficiency 99 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

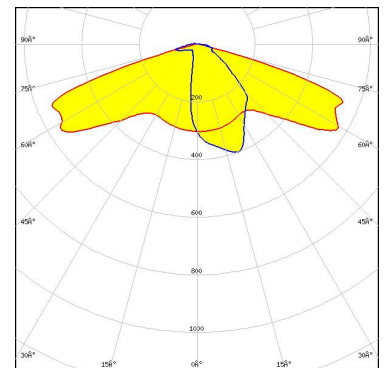

Light distribution files

#### SAMSUNG

LED HiLOM RH12 Z (LH351C)  
 FWHM / FWTM Asymmetric  
 Efficiency 96 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

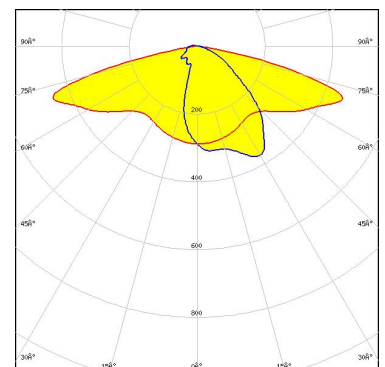


Light distribution files

#### OPTICAL RESULTS (MEASURED):

#### SAMSUNG


LED	HiLOM RH16 (LH351C)
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

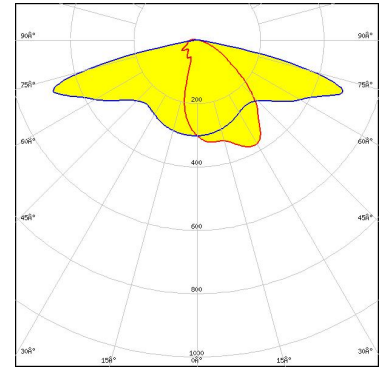

Light distribution files

#### SAMSUNG


LED	HiLOM RM12 Z (LH502C)
FWHM / FWTM	Asymmetric
Efficiency	96 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

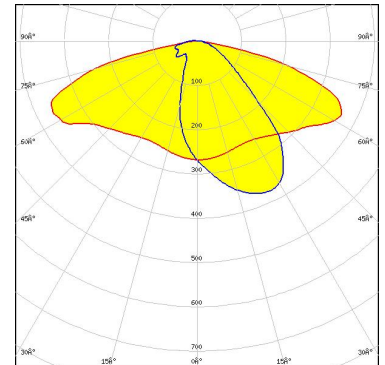

Light distribution files

#### SAMSUNG

LED	HiLOM RM16 Z (LH502C)
FWHM / FWTM	Asymmetric
Efficiency	98 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

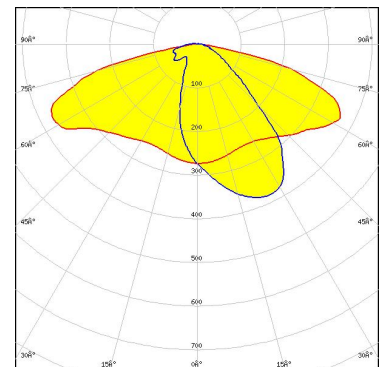


Light distribution files



#### OPTICAL RESULTS (MEASURED):

#### SAMSUNG


LED HiLOM RM8 Z (LH502C)  
 FWHM / FWTM Asymmetric  
 Efficiency 97 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

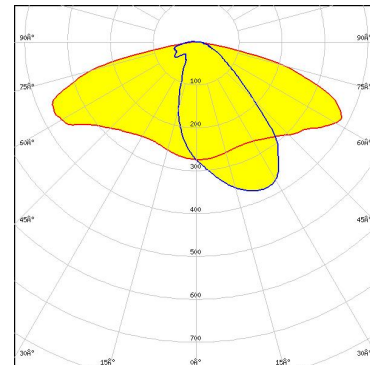

Light distribution files

#### SAMSUNG


LED LH351B  
 FWHM / FWTM Asymmetric  
 Efficiency 89 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

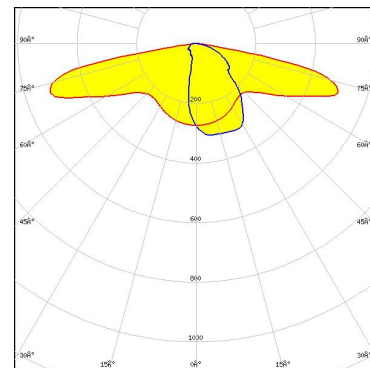

Light distribution files

#### SAMSUNG

LED LH351C  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

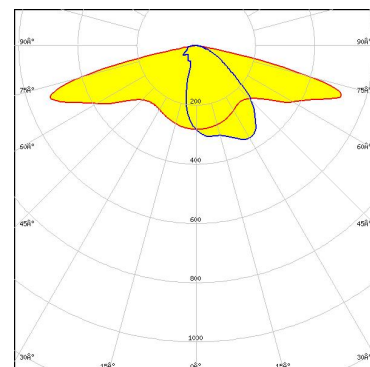


Light distribution files

#### OPTICAL RESULTS (MEASURED):

#### SAMSUNG


LED LH351D  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

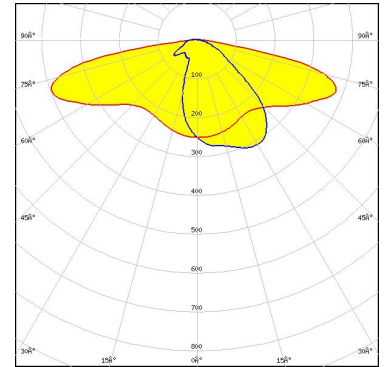

Light distribution files

#### SAMSUNG


LED LH351Z  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

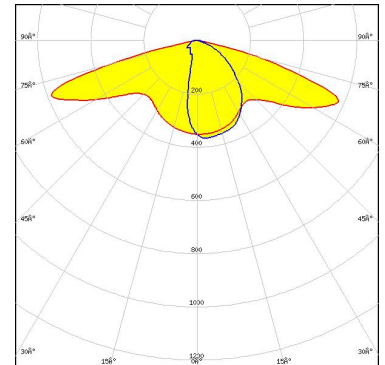

Light distribution files

#### SAMSUNG

LED LH508A  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

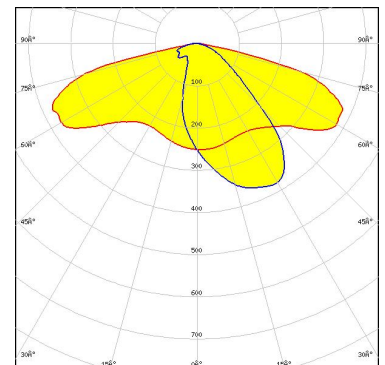


Light distribution files

#### OPTICAL RESULTS (MEASURED):



LED LED-Pa-L15c2W11c2-xxx-C050-01  
 FWHM / FWTM Asymmetric  
 Efficiency 97 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

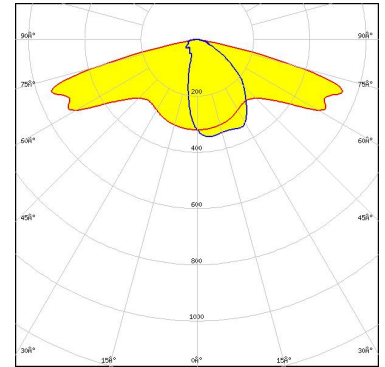


Light distribution files



SEOL SEMICONDUCTOR

LED Acrich MJT 4040  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

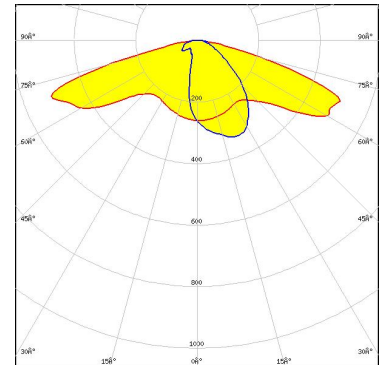

Light distribution files



SEOL SEMICONDUCTOR


LED Z5  
 FWHM / FWTM Asymmetric  
 Efficiency 93 %  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Light distribution files

#### OPTICAL RESULTS (MEASURED):




LED Z5M1/Z5M2  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

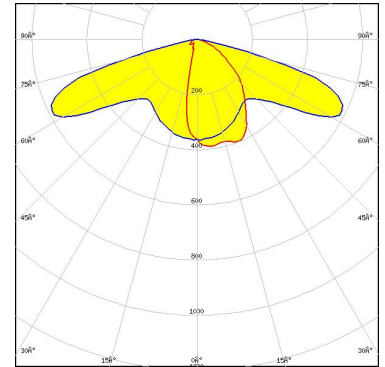

Light distribution files




LED Z5M3  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

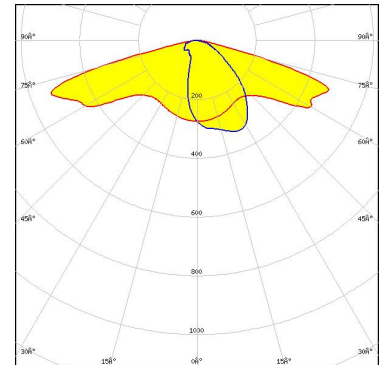

Light distribution files



LED Z5M4  
FWHM / FWTM Asymmetric  
Efficiency 96 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

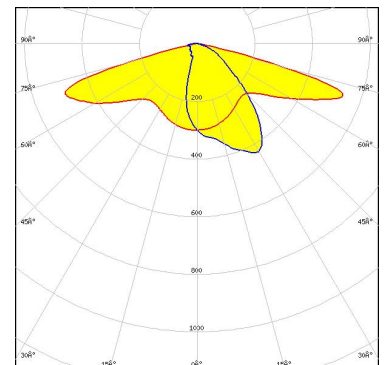


Light distribution files

#### OPTICAL RESULTS (MEASURED):




LED Z8Y22  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

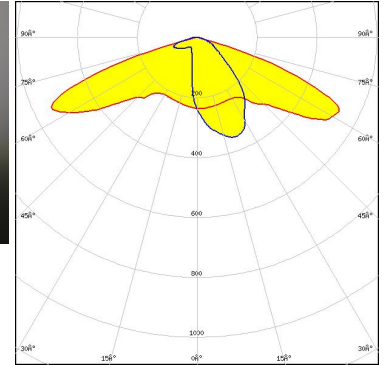

Light distribution files




LED Z8Y22P  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

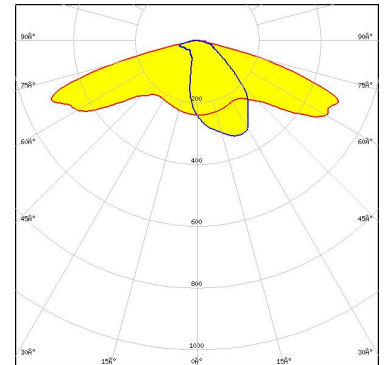

Light distribution files



LED TL1L4  
FWHM / FWTM Asymmetric  
Efficiency 93 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

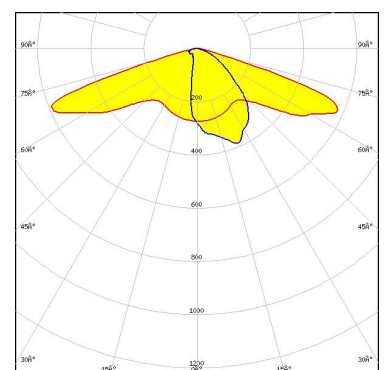

Light distribution files

#### OPTICAL RESULTS (MEASURED):


#### TRIDONIC

LED	RLE 2x4 2000lm HP EXC2 OTD
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Light distribution files

#### TRIDONIC


LED	RLE 2x8 4000lm HP EXC2 OTD
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

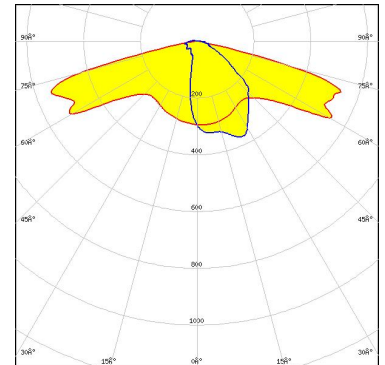

Light distribution files

#### TRIDONIC

LED	RLE G1 49x121mm 2000lm xxx EXC OTD
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

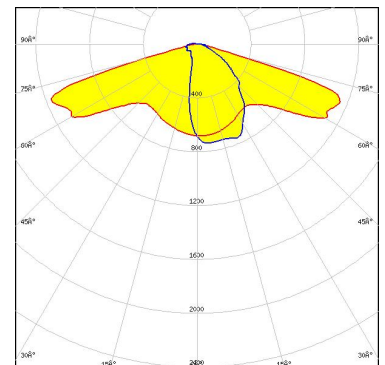


Light distribution files

#### OPTICAL RESULTS (MEASURED):

#### TRIDONIC


LED RLE G1 49x133mm 2000lm xxx EXC OTD  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

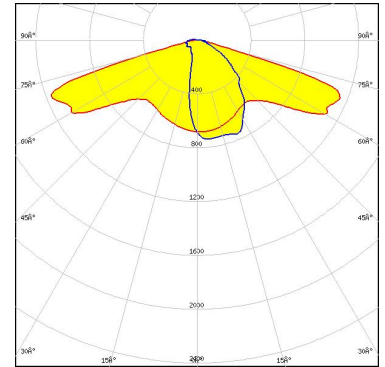

Light distribution files

#### TRIDONIC


LED RLE G1 49x223mm 4000lm xxx EXC OTD  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

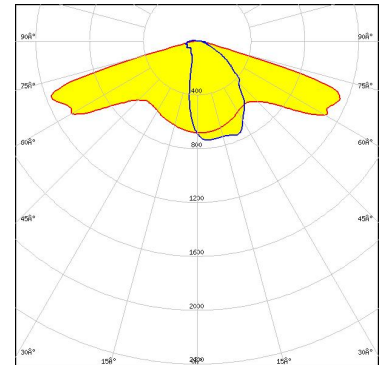

Light distribution files

#### TRIDONIC

LED RLE G1 49x245mm 4000lm xxx EXC OTD  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

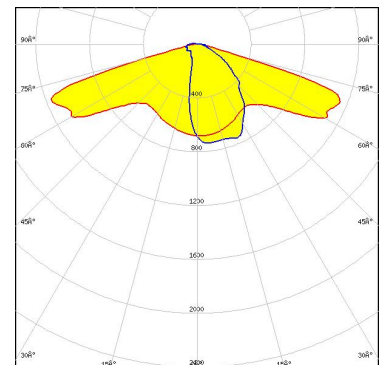


Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED J Series 5050 Round LES  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

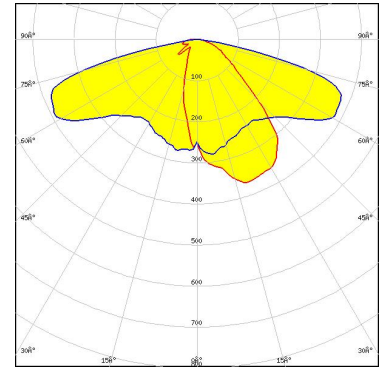

Light distribution files



LED J Series 5050 Round LES  
 FWHM / FWTM Asymmetric  
 Efficiency 80 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

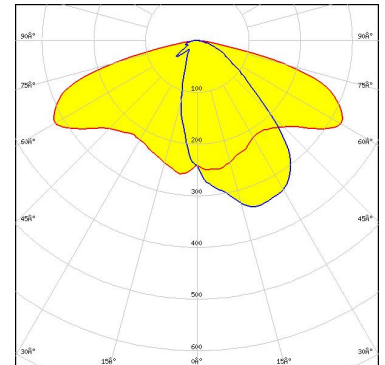


Light distribution files

Protective plate, glass



LED J Series 5050B 6V K Class  
 FWHM / FWTM Asymmetric  
 Efficiency 88 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

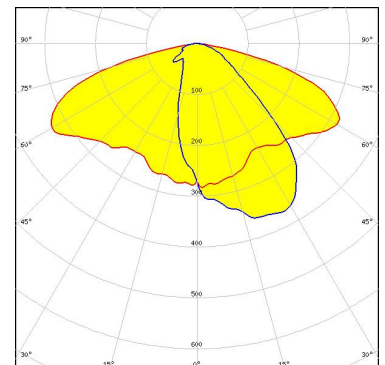

Light distribution files


Protective plate, glass



#### OPTICAL RESULTS (SIMULATED):




LED J Series 5050C 6V E Class  
 FWHM / FWTM Asymmetric  
 Efficiency 86 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 C17580\_STRADA-2X2-SHD-WHT

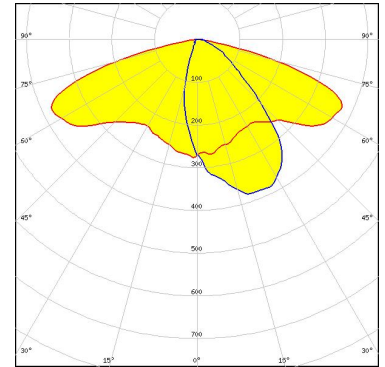

Light distribution files




LED J Series 5050C 6V E Class  
 FWHM / FWTM Asymmetric  
 Efficiency 92 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

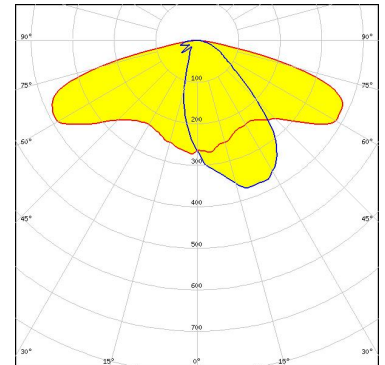

Light distribution files



LED J Series 5050C 6V E Class  
 FWHM / FWTM Asymmetric  
 Efficiency 81 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 C17677\_STRADA-2X2-SHD-BLK

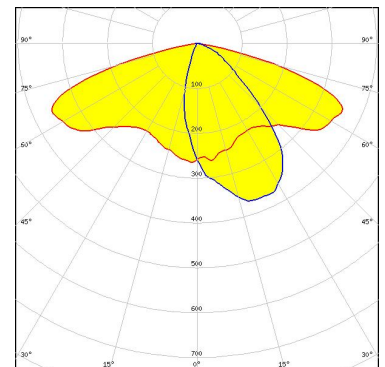


Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED XHP35 HI  
FWHM / FWTM Asymmetric  
Efficiency 89 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

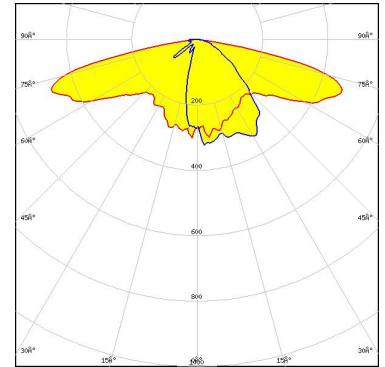

Light distribution files




LED XM-L2  
FWHM / FWTM Asymmetric  
Efficiency %  
LEDs/each optic 1  
Light colour/type White  
Required components:

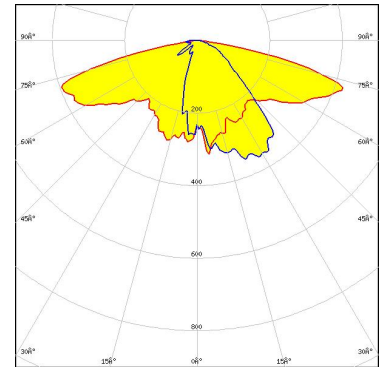

Light distribution files



LED XP-G2  
FWHM / FWTM Asymmetric  
Efficiency 84 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

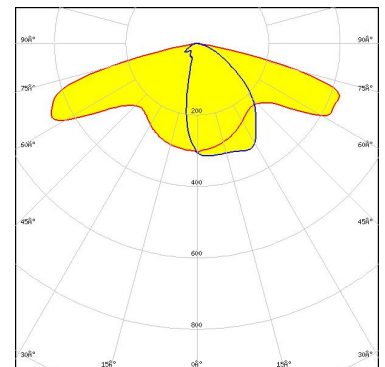


Protective plate, glass

Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED XP-G2  
 FWHM / FWTM Asymmetric  
 Efficiency 86 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 C17580\_STRADA-2X2-SHD-WHT

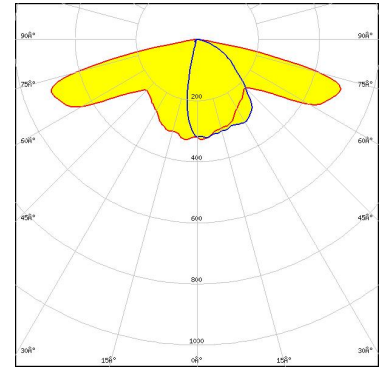

Light distribution files




LED XP-G2 HE  
 FWHM / FWTM Asymmetric  
 Efficiency 92 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

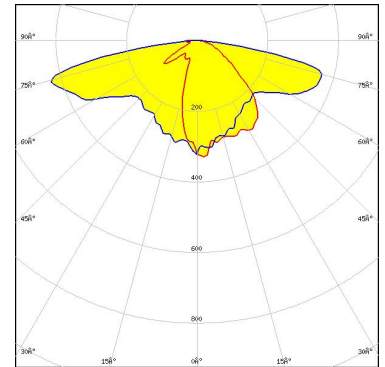

Light distribution files



LED XP-G2 HE  
 FWHM / FWTM Asymmetric  
 Efficiency 82 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 C17580\_STRADA-2X2-SHD-WHT

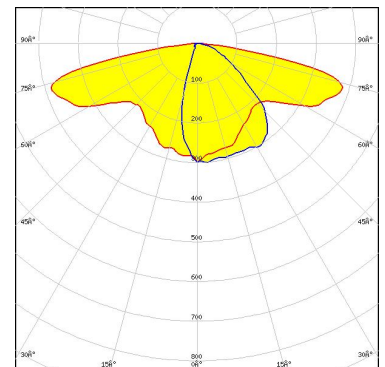

Light distribution files


#### OPTICAL RESULTS (SIMULATED):



LED XP-G3  
FWHM / FWTM Asymmetric  
Efficiency 79 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

Protective plate, glass


Light distribution files

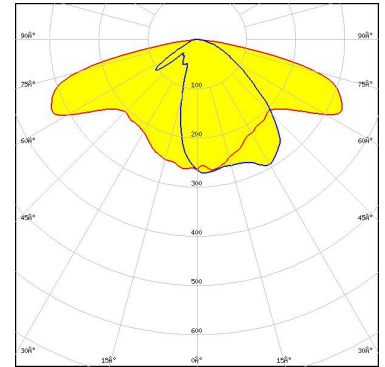

LED XP-G3  
FWHM / FWTM Asymmetric  
Efficiency 76 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
C17580\_STRADA-2X2-SHD-WHT

Protective plate, glass


Light distribution files

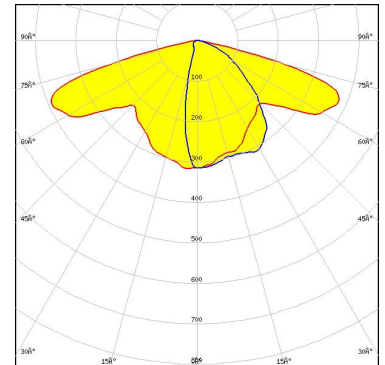

LED XP-G3  
FWHM / FWTM Asymmetric  
Efficiency 71 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
C17677\_STRADA-2X2-SHD-BLK

Protective plate, glass

Light distribution files

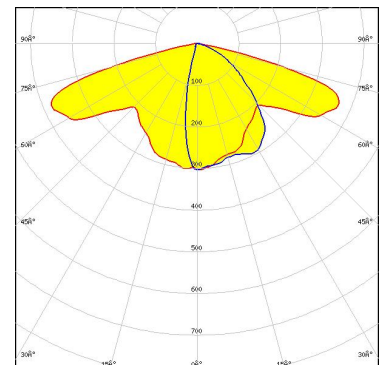


#### OPTICAL RESULTS (SIMULATED):



LED XP-G4  
 FWHM / FWTM Asymmetric  
 Efficiency 81 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:


Protective plate, glass

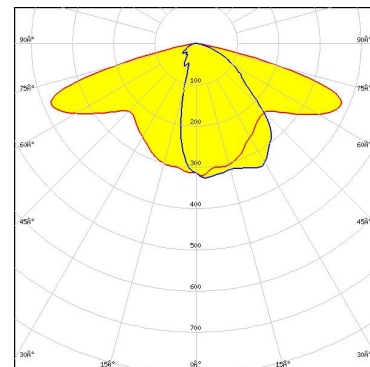

Light distribution files




LED XP-G4  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

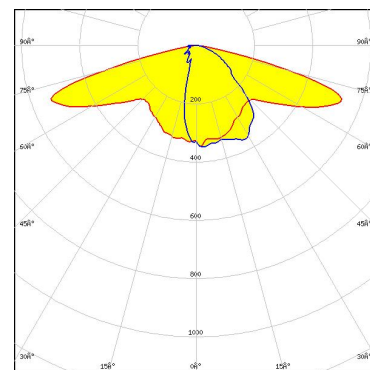

Light distribution files



LED XP-L2  
 FWHM / FWTM Asymmetric  
 Efficiency 79 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

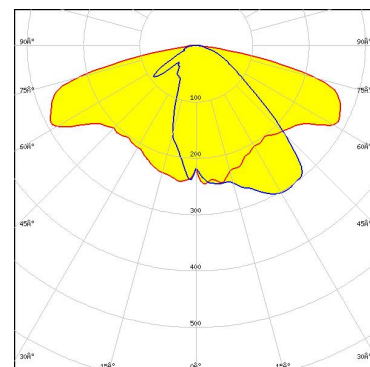


Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED XQ-E HD  
FWHM / FWTM Asymmetric  
Efficiency 89 %  
LEDs/each optic 1  
Light colour/type White  
Required components:

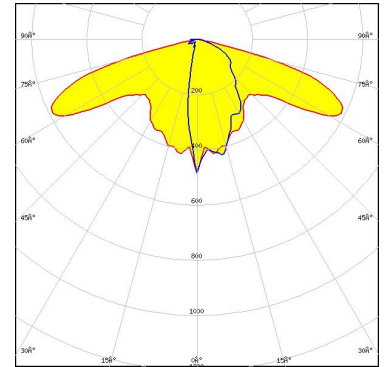

Light distribution files



LED LUXEON 3030 2D (Round LES)  
FWHM / FWTM Asymmetric  
Efficiency 81 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

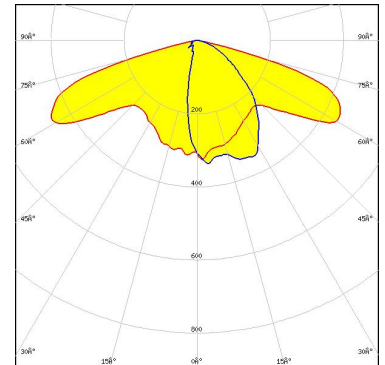


Protective plate, glass

Light distribution files



LED LUXEON 5050 Round LES  
FWHM / FWTM Asymmetric  
Efficiency 84 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

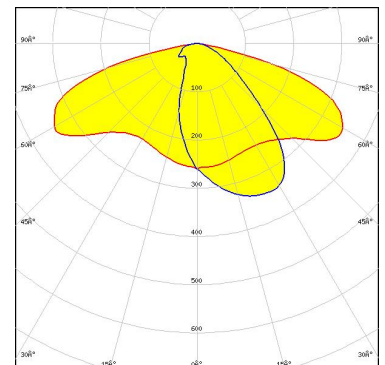


Protective plate, glass

Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED LUXEON 5050 Square LES  
 FWHM / FWTM Asymmetric  
 Efficiency 93 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

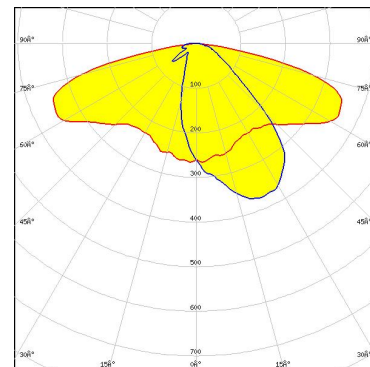

Light distribution files



LED LUXEON 5050 Square LES  
 FWHM / FWTM Asymmetric  
 Efficiency 83 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 C17677\_STRADA-2X2-SHD-BLK

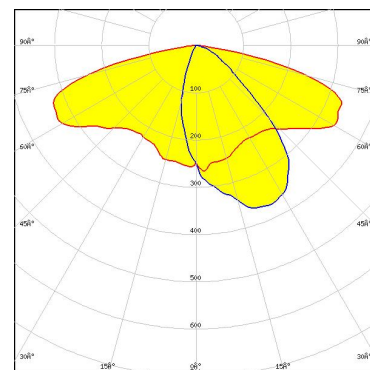


Light distribution files



LED LUXEON 5050 Square LES  
 FWHM / FWTM Asymmetric  
 Efficiency 80 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Protective plate, glass

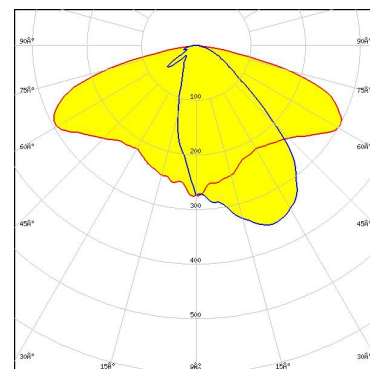


Light distribution files



#### OPTICAL RESULTS (SIMULATED):




LED LUXEON 5050 Square LES  
 FWHM / FWTM Asymmetric  
 Efficiency 89 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 C17580\_STRADA-2X2-SHD-WHT

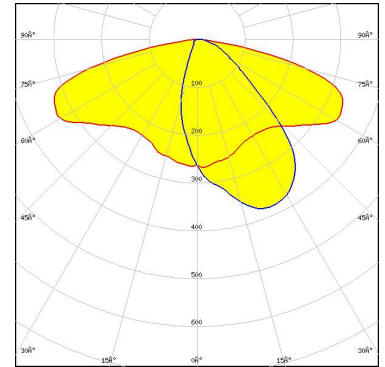

Light distribution files



LED LUXEON 5050 Square LES  
 FWHM / FWTM Asymmetric  
 Efficiency 76 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 C17580\_STRADA-2X2-SHD-WHT

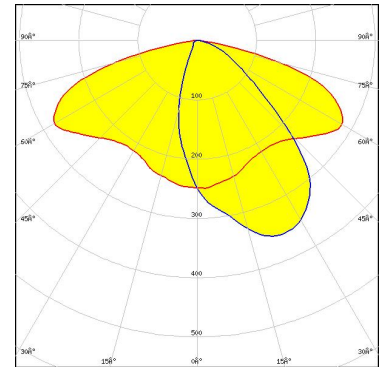


Light distribution files

Protective plate, glass



LED LUXEON 5050 Square LES  
 FWHM / FWTM Asymmetric  
 Efficiency 72 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 C17677\_STRADA-2X2-SHD-BLK

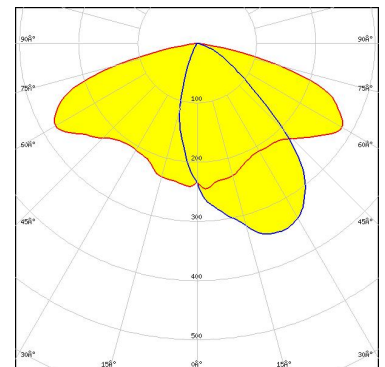

Light distribution files


Protective plate, glass



#### OPTICAL RESULTS (SIMULATED):




LED LUXEON H50-2  
 FWHM / FWTM Asymmetric  
 Efficiency %  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

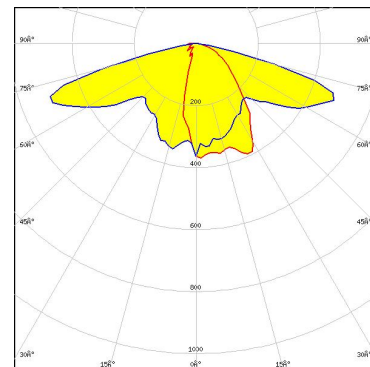

Light distribution files



LED LUXEON HL2X  
 FWHM / FWTM Asymmetric  
 Efficiency 90 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

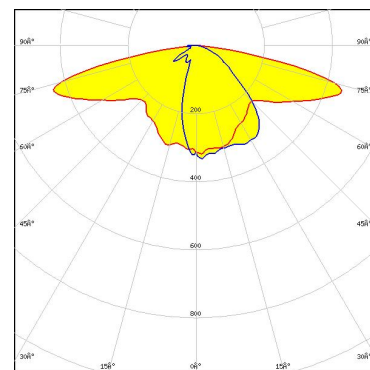


Light distribution files



LED LUXEON HL2X-V  
 FWHM / FWTM Asymmetric  
 Efficiency 93 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:



Simulated from photometric data

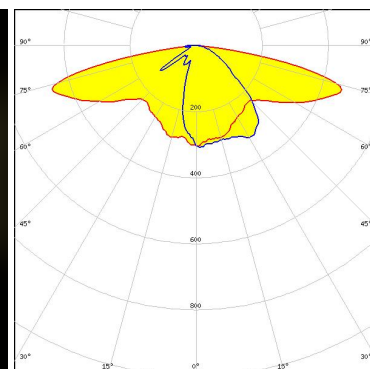


Light distribution files

#### OPTICAL RESULTS (SIMULATED):



LED LUXEON HL2X-V  
 FWHM / FWTM Asymmetric  
 Efficiency 79 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:


Protective plate, glass

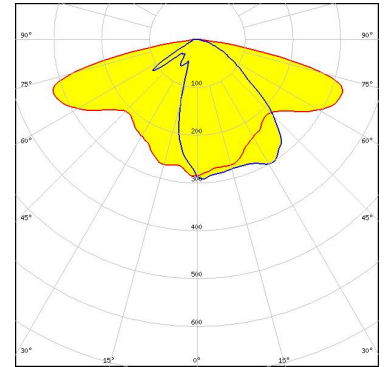

Light distribution files



LED LUXEON HL2Z  
 FWHM / FWTM Asymmetric  
 Efficiency 92 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

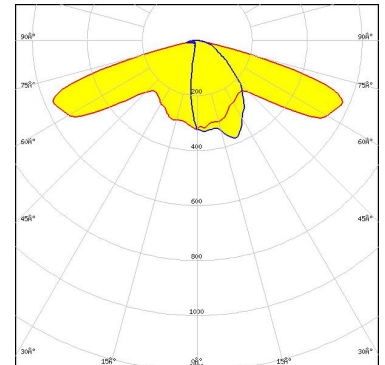


Light distribution files



LED LUXEON HL2Z  
 FWHM / FWTM Asymmetric  
 Efficiency 79 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Protective plate, glass

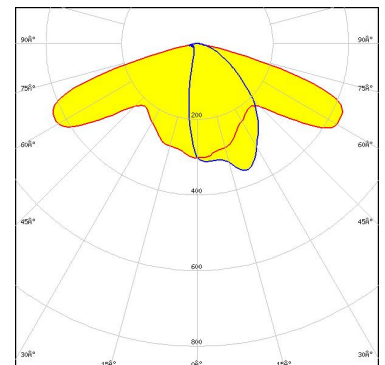


Light distribution files

#### OPTICAL RESULTS (SIMULATED):



LED LUXEON HL4X  
 FWHM / FWTM Asymmetric  
 Efficiency 78 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:


Protective plate, glass

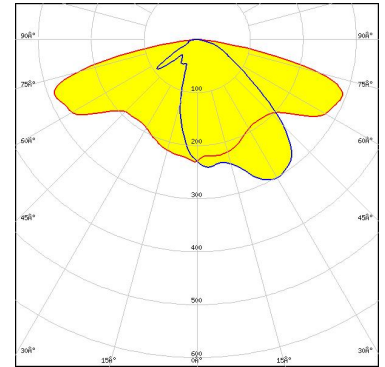

Light distribution files




LED LUXEON HL4X  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

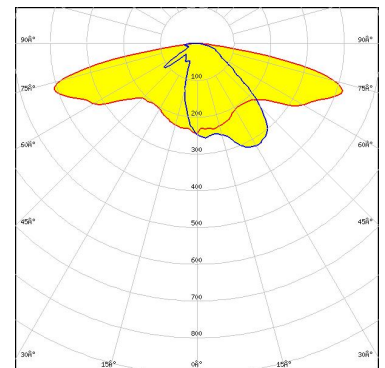

Light distribution files



LED LUXEON TX  
 FWHM / FWTM Asymmetric  
 Efficiency 90 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

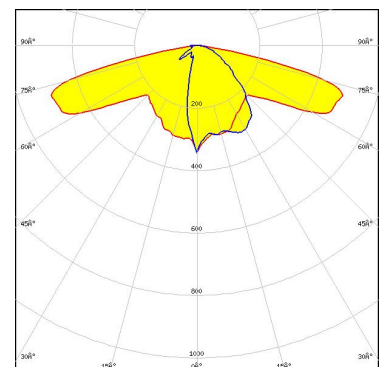


Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED LUXEON V2  
FWHM / FWTM Asymmetric  
Efficiency 93 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

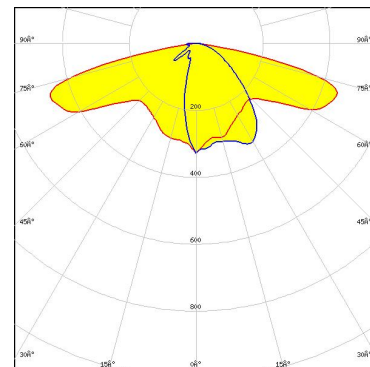

Light distribution files




LED LUXEON XR-HL2X (L2H2-xxxxxxxMLU010)  
FWHM / FWTM Asymmetric  
Efficiency 93 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

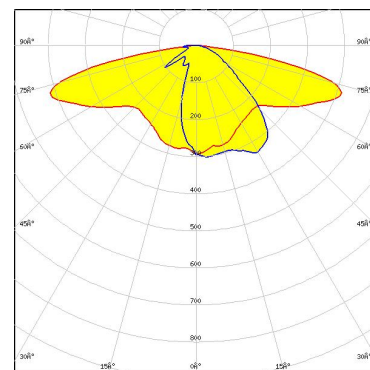

Light distribution files



LED LUXEON XR-HL2X (L2H2-xxxxxxxMLU010)  
FWHM / FWTM Asymmetric  
Efficiency 78 %  
Peak intensity 0.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

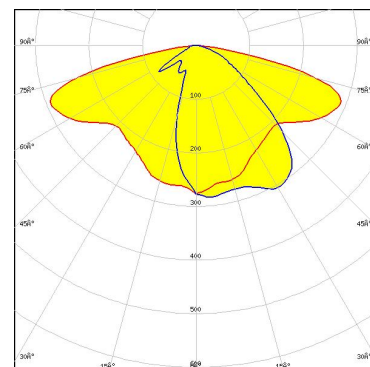



Protective plate, glass

Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED SST-20F-W  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

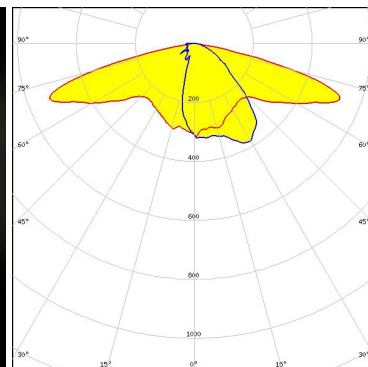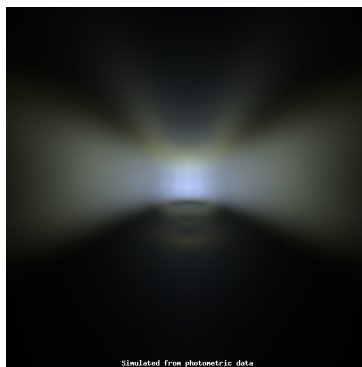

Light distribution files



LED SST-20F-W  
FWHM / FWTM Asymmetric  
Efficiency 81 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:


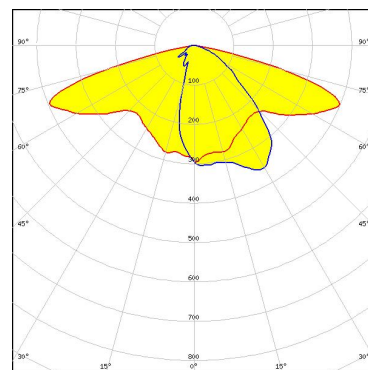


Protective plate, glass

Light distribution files



LED SST-36F-W  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

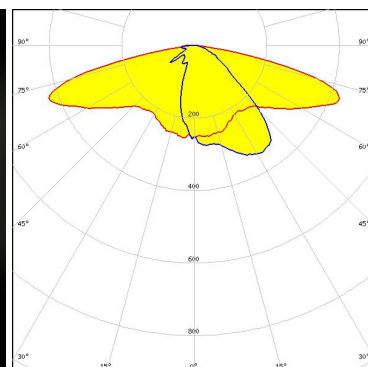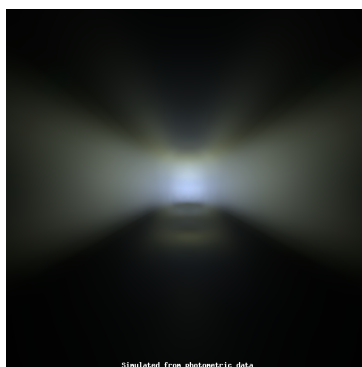

Light distribution files


#### OPTICAL RESULTS (SIMULATED):



LED SST-36F-W  
FWHM / FWTM Asymmetric  
Efficiency 79 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

Protective plate, glass


Light distribution files

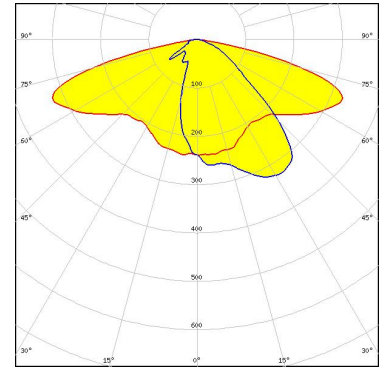

LED RecLED 122x50mm 1900lm 730 2x4 Opt G1  
FWHM / FWTM Asymmetric  
Efficiency 83 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

Protective plate, glass


Light distribution files

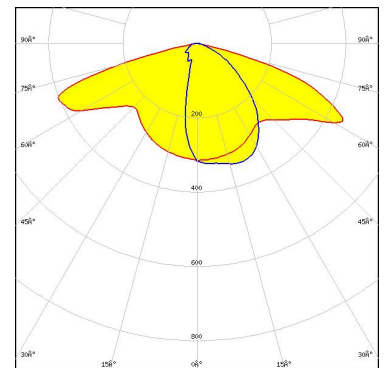

LED NF2x757G  
FWHM / FWTM Asymmetric  
Efficiency 81 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

Protective plate, glass


Light distribution files

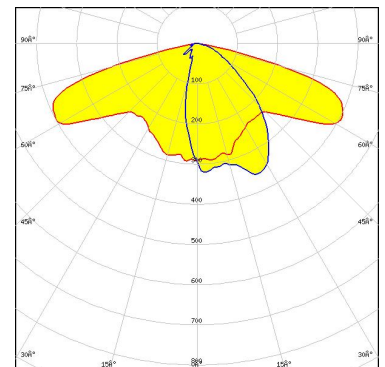

#### OPTICAL RESULTS (SIMULATED):




LED NV4WB35AM  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

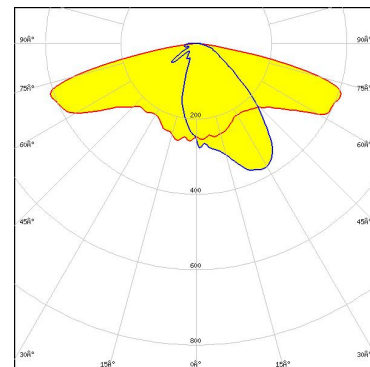

Light distribution files




LED NVSW219D  
 FWHM / FWTM Asymmetric  
 Efficiency 92 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

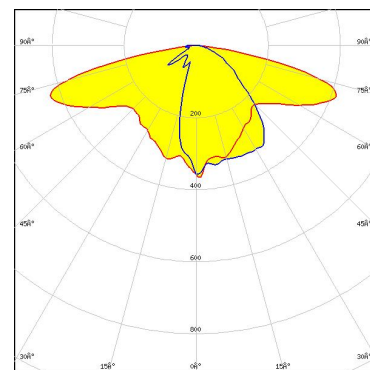

Light distribution files



LED NVSW219F  
 FWHM / FWTM Asymmetric  
 Efficiency 75 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

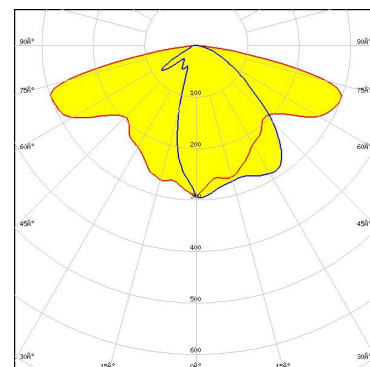

Protective plate, glass


Light distribution files



#### OPTICAL RESULTS (SIMULATED):




LED NVSW219F  
 FWHM / FWTM Asymmetric  
 Efficiency 90 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

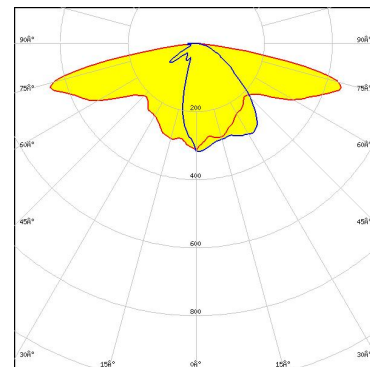

Light distribution files



LED NVSW519A  
 FWHM / FWTM Asymmetric  
 Efficiency 82 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

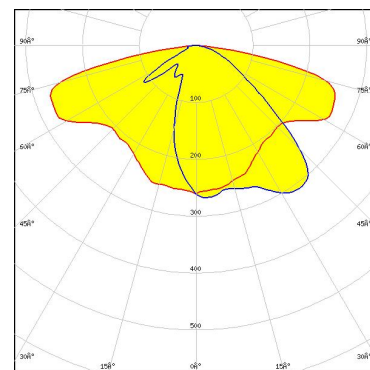


Light distribution files

Protective plate, glass



LED NVSW519A  
 FWHM / FWTM Asymmetric  
 Efficiency 91 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

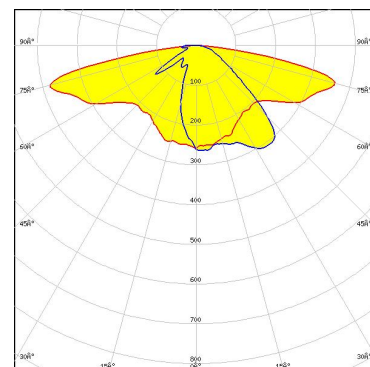


Light distribution files



#### OPTICAL RESULTS (SIMULATED):




LED NVSxE21A  
 FWHM / FWTM Asymmetric  
 Efficiency 95 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 4  
 Light colour/type White  
 Required components:

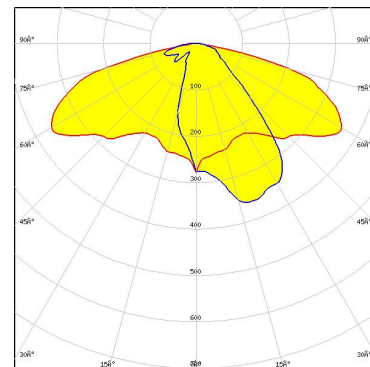

Light distribution files



LED NVSxE21A  
 FWHM / FWTM Asymmetric  
 Efficiency 81 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 4  
 Light colour/type White  
 Required components:

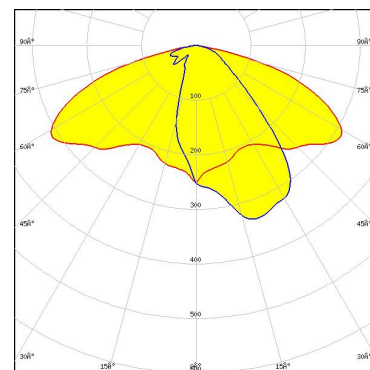


Protective plate, glass

Light distribution files



LED NVSxx19A  
 FWHM / FWTM Asymmetric  
 Efficiency 85 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

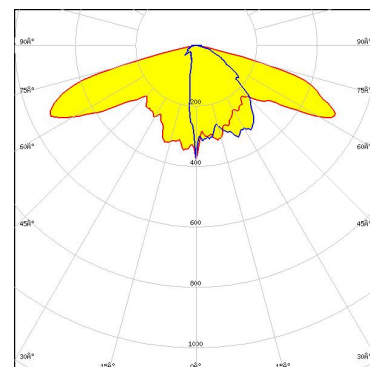


Protective plate, glass

Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED NVSxx19B/NVSxx19C  
 FWHM / FWTM Asymmetric  
 Efficiency 90 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

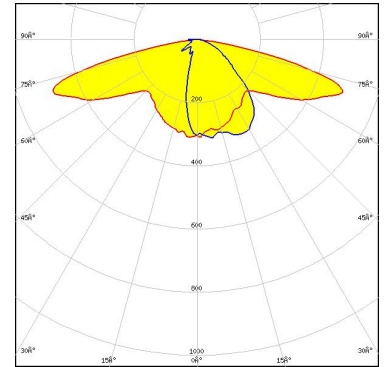

Light distribution files



LED NVSxx19B/NVSxx19C  
 FWHM / FWTM Asymmetric  
 Efficiency 80 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

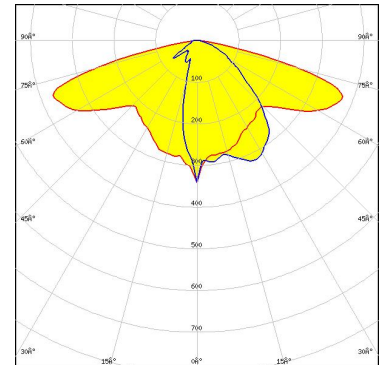


Light distribution files

Protective plate, glass



LED NVSxx19B/NVSxx19C  
 FWHM / FWTM Asymmetric  
 Efficiency 78 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

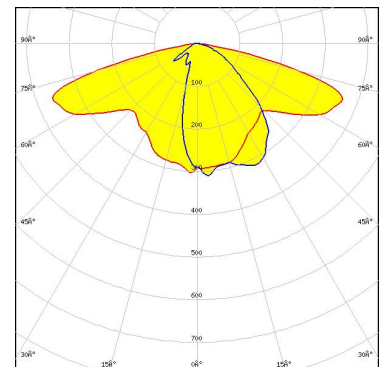


Light distribution files

Protective plate, glass

#### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors


LED Duris S8  
FWHM / FWTM Asymmetric  
Efficiency 88 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

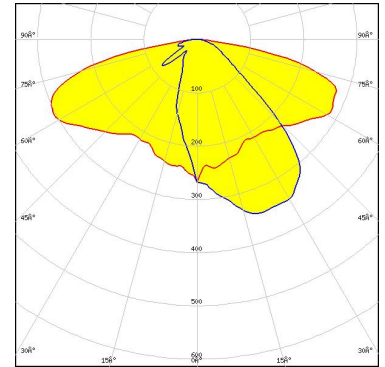

Light distribution files

**OSRAM**  
Opto Semiconductors


LED Duris S8  
FWHM / FWTM Asymmetric  
Efficiency 85 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
C17580\_STRADA-2X2-SHD-WHT

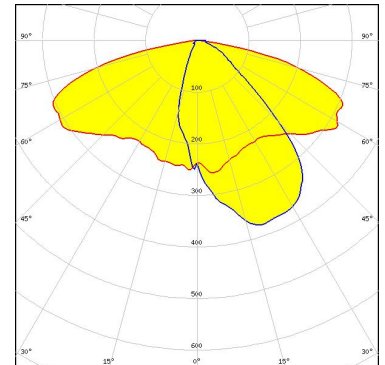

Light distribution files

**OSRAM**  
Opto Semiconductors

LED Duris S8  
FWHM / FWTM Asymmetric  
Efficiency 80 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
C17677\_STRADA-2X2-SHD-BLK

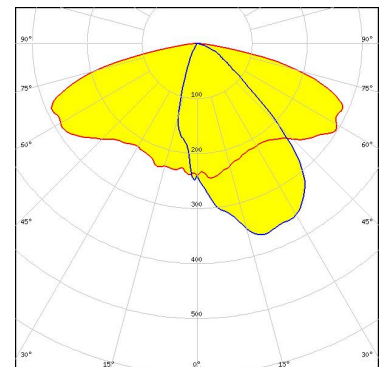

Light distribution files


#### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors

LED OSCONIQ P 3737 (2W version)  
FWHM / FWTM Asymmetric  
Efficiency 80 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

Protective plate, glass


Light distribution files

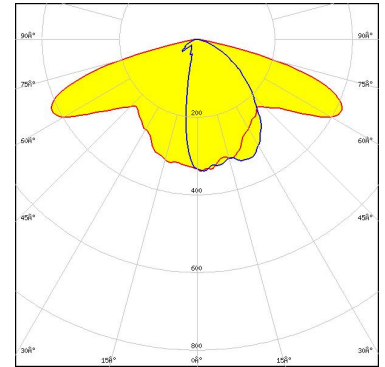

**OSRAM**  
Opto Semiconductors

LED OSCONIQ P 3737 (2W version)  
FWHM / FWTM Asymmetric  
Efficiency 90 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:


Light distribution files

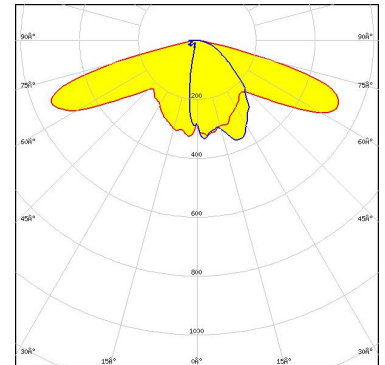

**OSRAM**  
Opto Semiconductors

LED OSCONIQ P 3737 (3W version)  
FWHM / FWTM Asymmetric  
Efficiency 93 %  
Peak intensity 2.1 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

Light distribution files

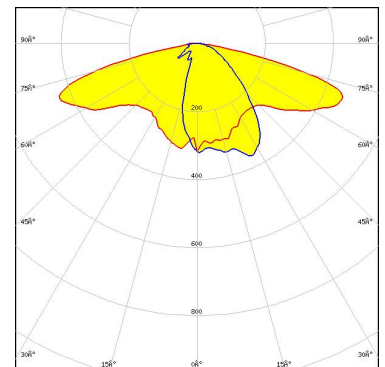


#### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors

LED: OSCONIQ S 5050 (Q9LR32)  
FWHM / FWTM: Asymmetric  
Efficiency: 81 %  
Peak intensity: 0.4 cd/lm  
LEDs/each optic: 1  
Light colour/type: White  
Required components:

Protective plate, glass


Light distribution files

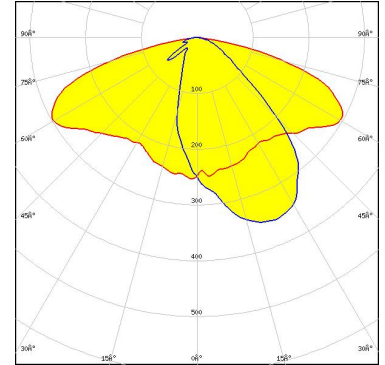

**OSRAM**  
Opto Semiconductors

LED: OSCONIQ S 5050 SFC  
FWHM / FWTM: Asymmetric  
Efficiency: 80 %  
Peak intensity: 0.4 cd/lm  
LEDs/each optic: 1  
Light colour/type: White  
Required components:  
C17677\_STRADA-2X2-SHD-BLK


Light distribution files

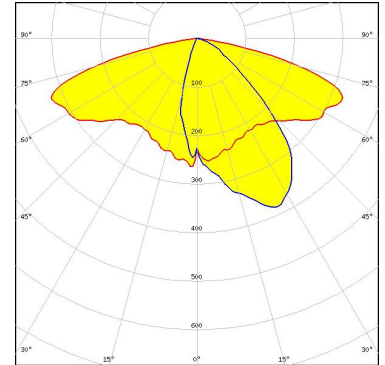

**OSRAM**  
Opto Semiconductors

LED: OSCONIQ S 5050 SFC  
FWHM / FWTM: Asymmetric  
Efficiency: 92 %  
Peak intensity: 0.4 cd/lm  
LEDs/each optic: 1  
Light colour/type: White  
Required components:


Light distribution files

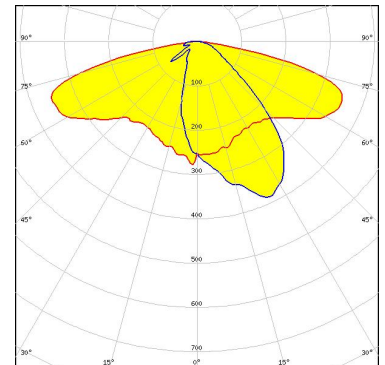

#### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors


LED OSCONIQ S 5050 SFC  
FWHM / FWTM Asymmetric  
Efficiency 85 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
C17580\_STRADA-2X2-SHD-WHT

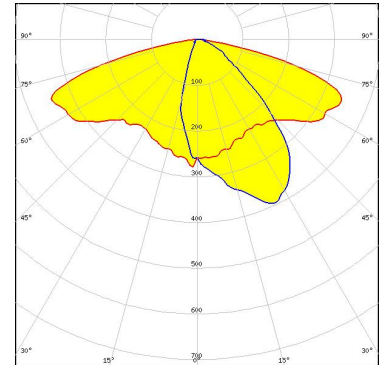

Light distribution files

**OSRAM**  
Opto Semiconductors

LED OSLO Pure 1414  
FWHM / FWTM Asymmetric  
Efficiency 81 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

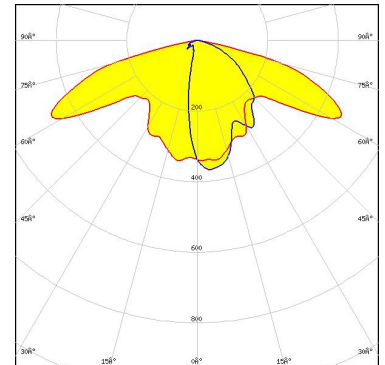


Light distribution files

Protective plate, glass

**OSRAM**  
Opto Semiconductors

LED OSLO Pure 1414  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

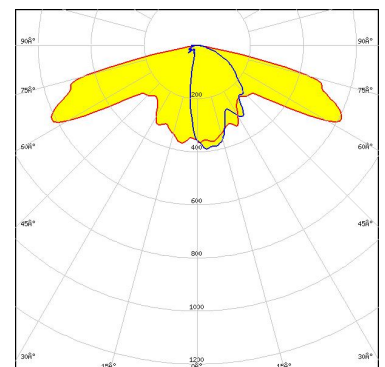


Light distribution files

#### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors


LED OSLON Square CSSRM2/CSSRM3  
FWHM / FWTM Asymmetric  
Efficiency 90 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

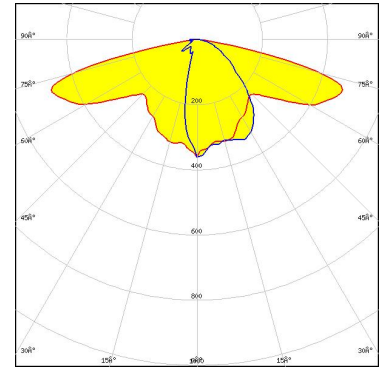

Light distribution files

**OSRAM**  
Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3  
FWHM / FWTM Asymmetric  
Efficiency 81 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

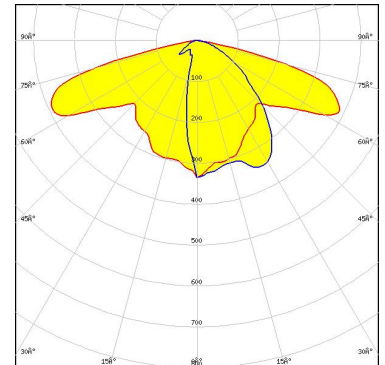


Protective plate, glass

Light distribution files

**OSRAM**  
Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3  
FWHM / FWTM Asymmetric  
Efficiency 85 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
C17580\_STRADA-2X2-SHD-WHT

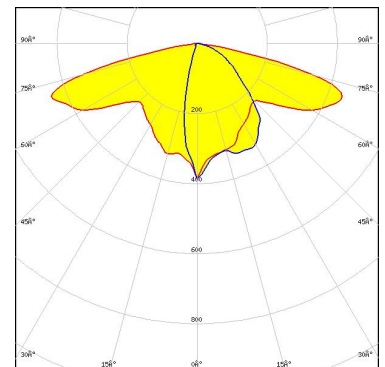

Light distribution files




#### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3  
FWHM / FWTM Asymmetric  
Efficiency 74 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
C17580\_STRADA-2X2-SHD-WHT


Protective plate, glass

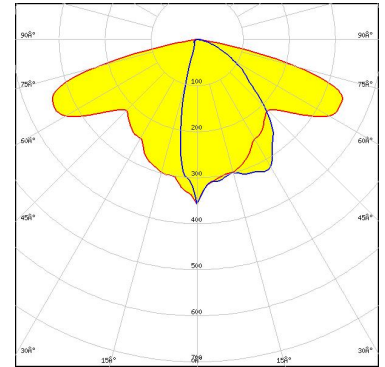

Light distribution files

**OSRAM**  
Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3  
FWHM / FWTM Asymmetric  
Efficiency 82 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
C17677\_STRADA-2X2-SHD-BLK

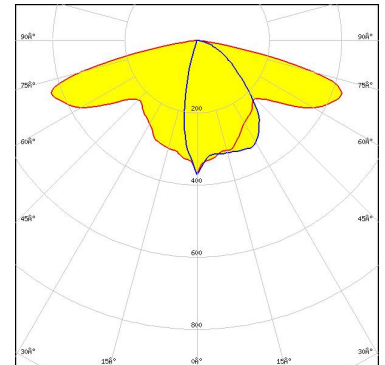


Light distribution files

**OSRAM**  
Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3  
FWHM / FWTM Asymmetric  
Efficiency 71 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
C17677\_STRADA-2X2-SHD-BLK

Protective plate, glass

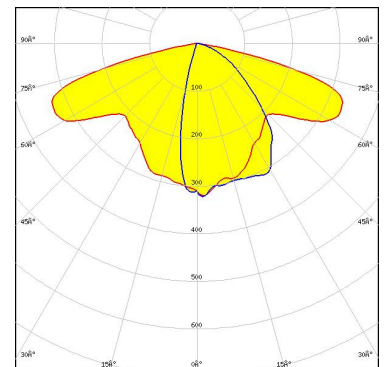


Light distribution files



#### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors


LED OSLON Square CSSRM2/CSSRM3  
FWHM / FWTM Asymmetric  
Efficiency 83 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
C17580\_STRADA-2X2-SHD-WHT

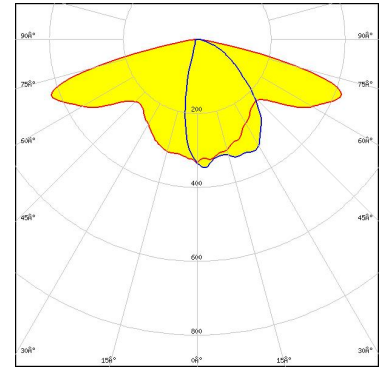

Light distribution files

**PHILIPS**


LED Fortimo FastFlex LED 2x8 DA (U)HE  
FWHM / FWTM Asymmetric  
Efficiency 95 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

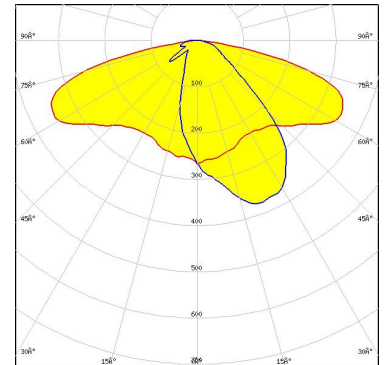

Light distribution files

**PHILIPS**

LED Fortimo FastFlex LED 2x8 DA (U)HE  
FWHM / FWTM Asymmetric  
Efficiency 81 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

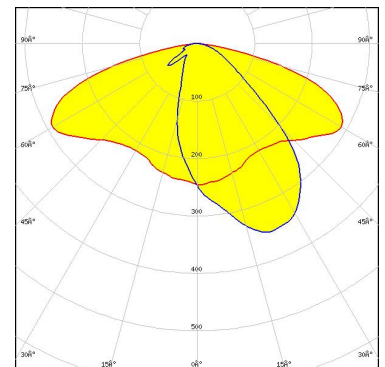

Protective plate, glass

Light distribution files

#### OPTICAL RESULTS (SIMULATED):

### PHILIPS

LED Fortimo FastFlex LED 2x8 DA G4+

FWHM / FWTM Asymmetric


Efficiency 69 %

Peak intensity 0.3 cd/lm

LEDs/each optic 1

Light colour/type White

Required components:  
C17580\_STRADA-2X2-SHD-WHT

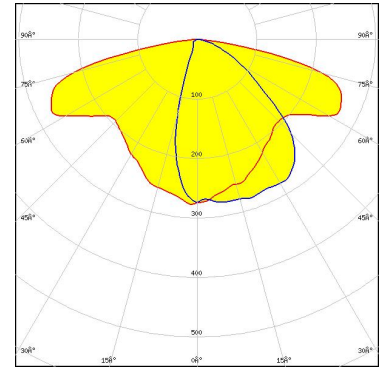

Light distribution files

### PHILIPS

LED Fortimo FastFlex LED 2x8 DA G4+

FWHM / FWTM Asymmetric


Efficiency 65 %

Peak intensity 0.3 cd/lm

LEDs/each optic 1

Light colour/type White

Required components:  
C17677\_STRADA-2X2-SHD-BLK

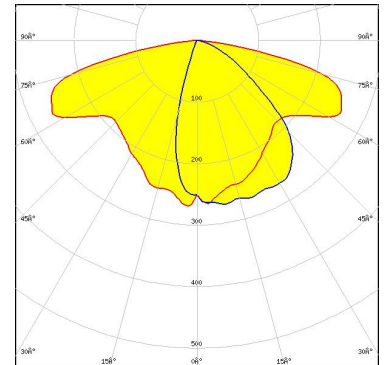

Light distribution files

### PHILIPS

LED Fortimo FastFlex LED 2x8 DA G5

FWHM / FWTM Asymmetric


Efficiency 83 %

Peak intensity 0.4 cd/lm

LEDs/each optic 1

Light colour/type White

Required components:

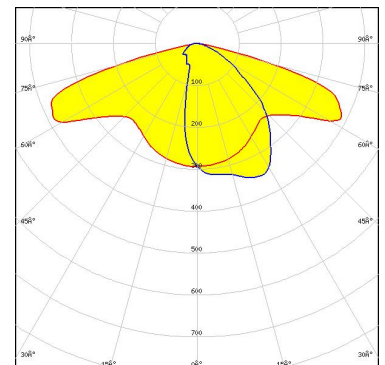

Protective plate, glass

Light distribution files


#### OPTICAL RESULTS (SIMULATED):

### SAMSUNG

LED	HiLOM RH12 Z (LH351C)
FWHM / FWTM	Asymmetric
Efficiency	82 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Protective plate, glass

Light distribution files

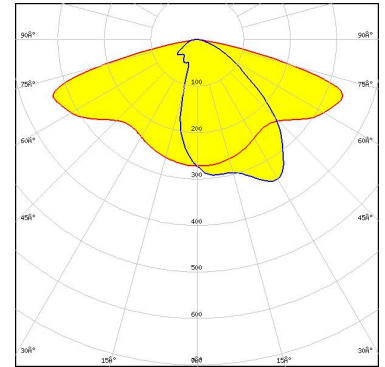


### SAMSUNG

LED	HiLOM RM8 Z (LH502C)
FWHM / FWTM	Asymmetric
Efficiency	84 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Protective plate, glass


Light distribution files

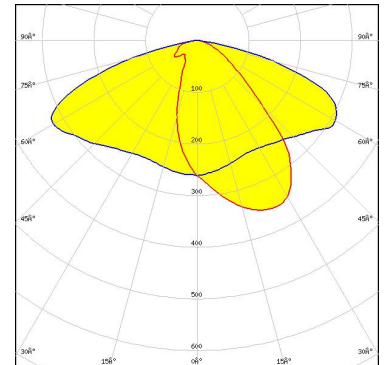

### SAMSUNG

LED	LH181B
FWHM / FWTM	Asymmetric
Efficiency	92 %
Peak intensity	0.4 cd/lm
LEDs/each optic	4
Light colour/type	White
Required components:	

Light distribution files

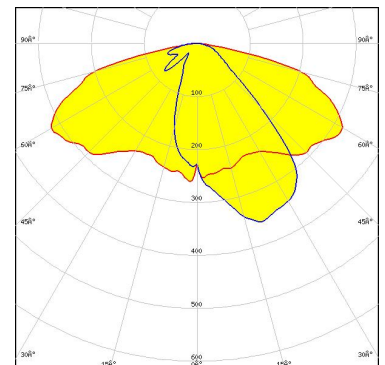


#### OPTICAL RESULTS (SIMULATED):

#### SAMSUNG

LED LH351B  
 FWHM / FWTM Asymmetric  
 Efficiency 69 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 C17677\_STRADA-2X2-SHD-BLK

Protective plate, glass

Light distribution files

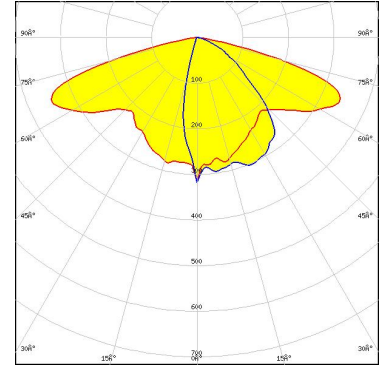


#### SAMSUNG

LED LH351B  
 FWHM / FWTM Asymmetric  
 Efficiency 77 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Protective plate, glass

Light distribution files

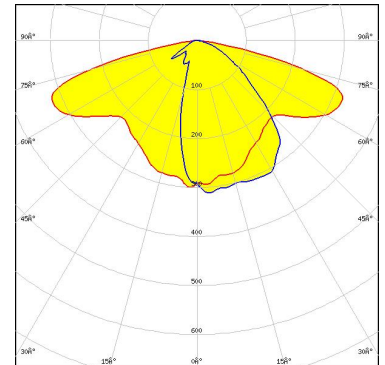


#### SAMSUNG

LED LH351C  
 FWHM / FWTM Asymmetric  
 Efficiency 79 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Protective plate, glass


Light distribution files

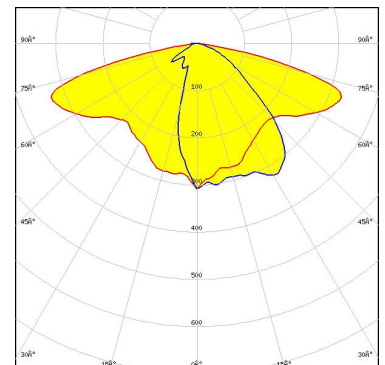

#### OPTICAL RESULTS (SIMULATED):

#### SAMSUNG


LED LH502D  
 FWHM / FWTM Asymmetric  
 Efficiency 80 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 C17677\_STRADA-2X2-SHD-BLK

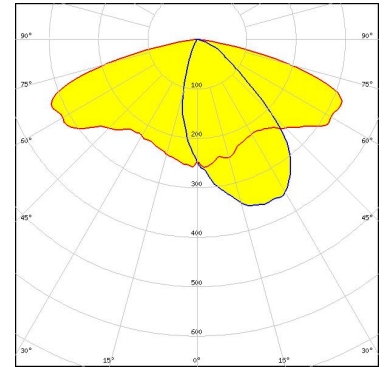

Light distribution files

#### SAMSUNG


LED LH502D  
 FWHM / FWTM Asymmetric  
 Efficiency 85 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 C17580\_STRADA-2X2-SHD-WHT

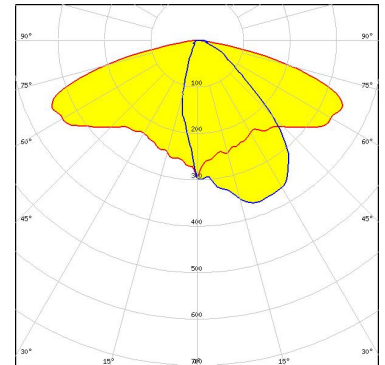

Light distribution files

#### SAMSUNG

LED LH502D  
 FWHM / FWTM Asymmetric  
 Efficiency 92 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

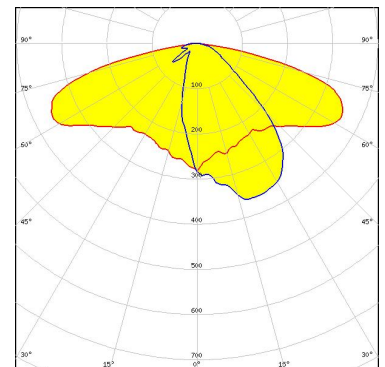

Light distribution files


#### OPTICAL RESULTS (SIMULATED):

#### SAMSUNG

LED LM301B  
 FWHM / FWTM Asymmetric  
 Efficiency 80 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 4  
 Light colour/type White  
 Required components:

Protective plate, glass


Light distribution files

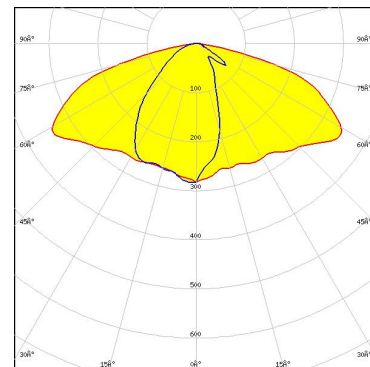

#### SAMSUNG


LED LM301B  
 FWHM / FWTM Asymmetric  
 Efficiency 91 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 4  
 Light colour/type White  
 Required components:

Light distribution files

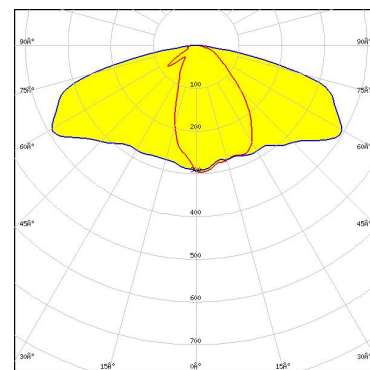

LED MJT 5050  
 FWHM / FWTM Asymmetric  
 Efficiency 92 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:


Light distribution files

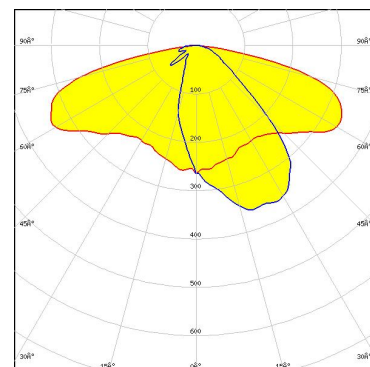

#### OPTICAL RESULTS (SIMULATED):




LED: SEOUL DC 5050 6V  
 FWHM / FWTM: Asymmetric  
 Efficiency: 80 %  
 Peak intensity: 0.4 cd/lm  
 LEDs/each optic: 1  
 Light colour/type: White  
 Required components:  
 C17677\_STRADA-2X2-SHD-BLK

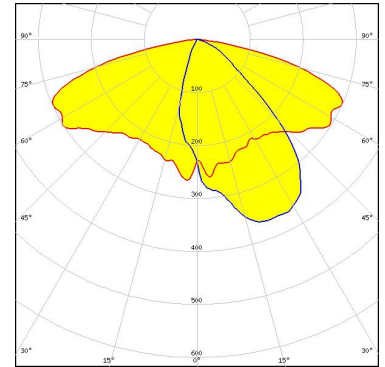

Light distribution files




LED: SEOUL DC 5050 6V  
 FWHM / FWTM: Asymmetric  
 Efficiency: 94 %  
 Peak intensity: 0.4 cd/lm  
 LEDs/each optic: 1  
 Light colour/type: White  
 Required components:

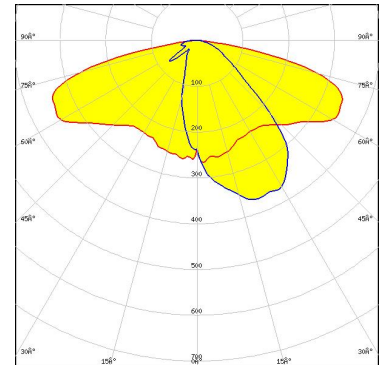

Light distribution files






LED: SEOUL DC 5050 6V  
 FWHM / FWTM: Asymmetric  
 Efficiency: 85 %  
 Peak intensity: 0.4 cd/lm  
 LEDs/each optic: 1  
 Light colour/type: White  
 Required components:  
 C17580\_STRADA-2X2-SHD-WHT

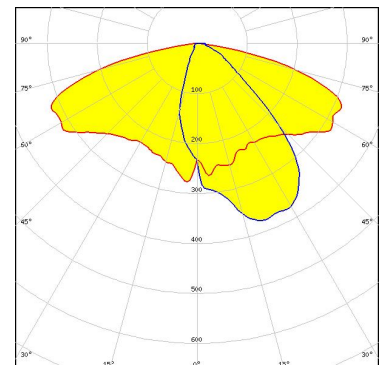

Light distribution files






#### OPTICAL RESULTS (SIMULATED):

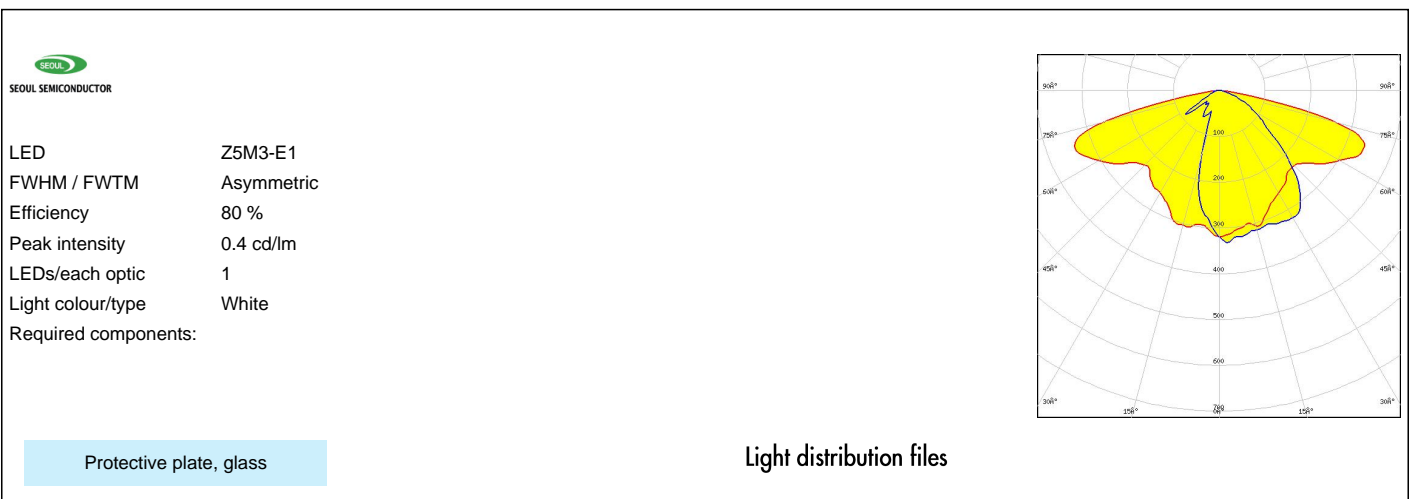
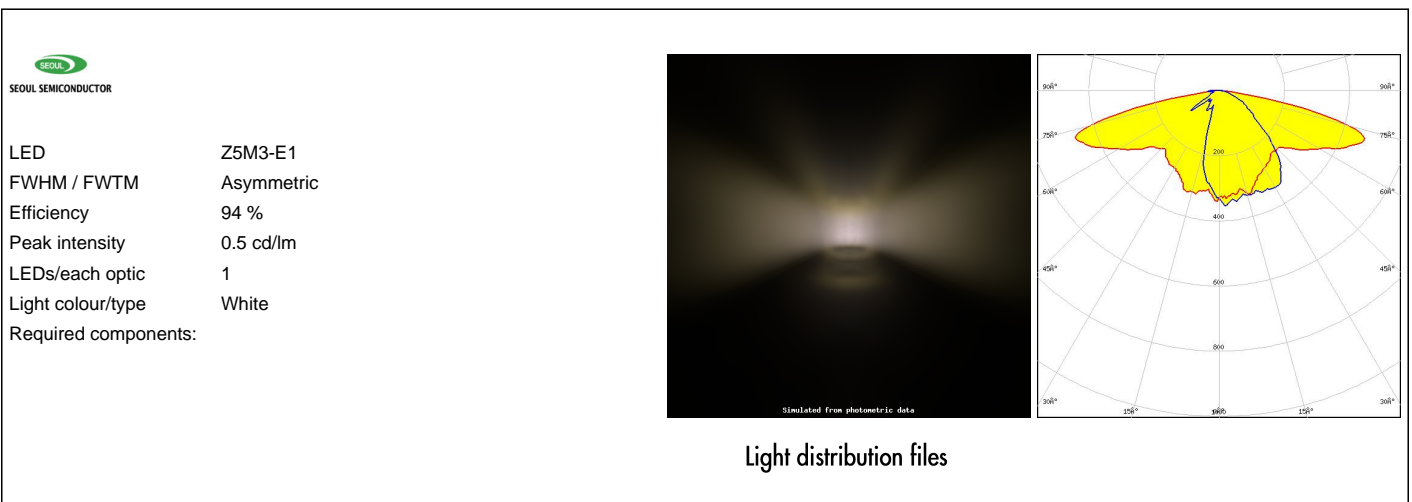
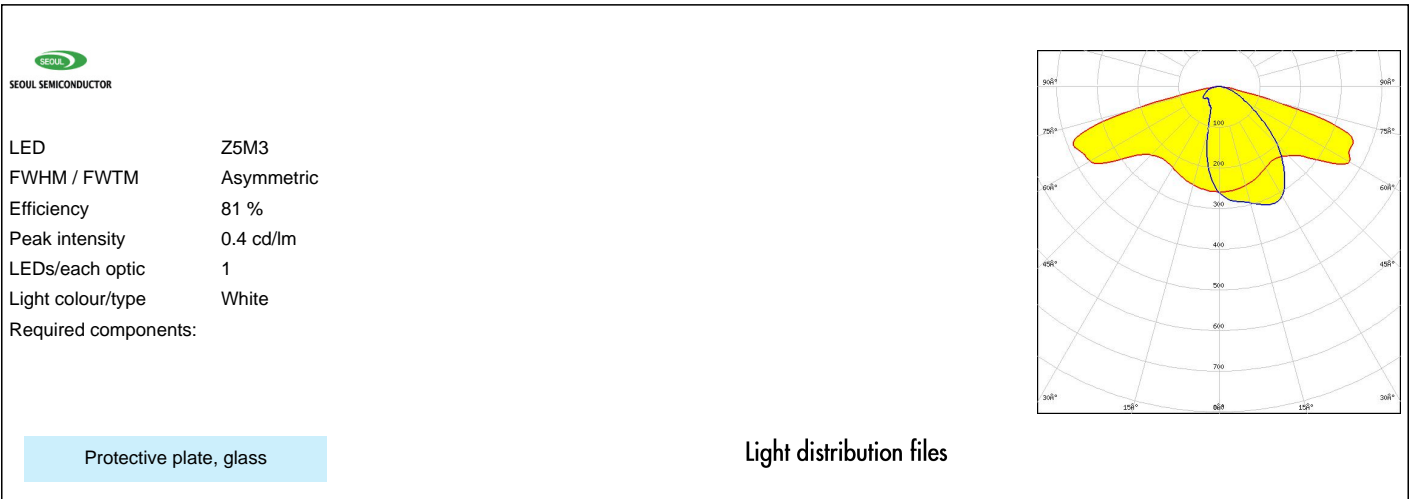




#### OPTICAL RESULTS (SIMULATED):

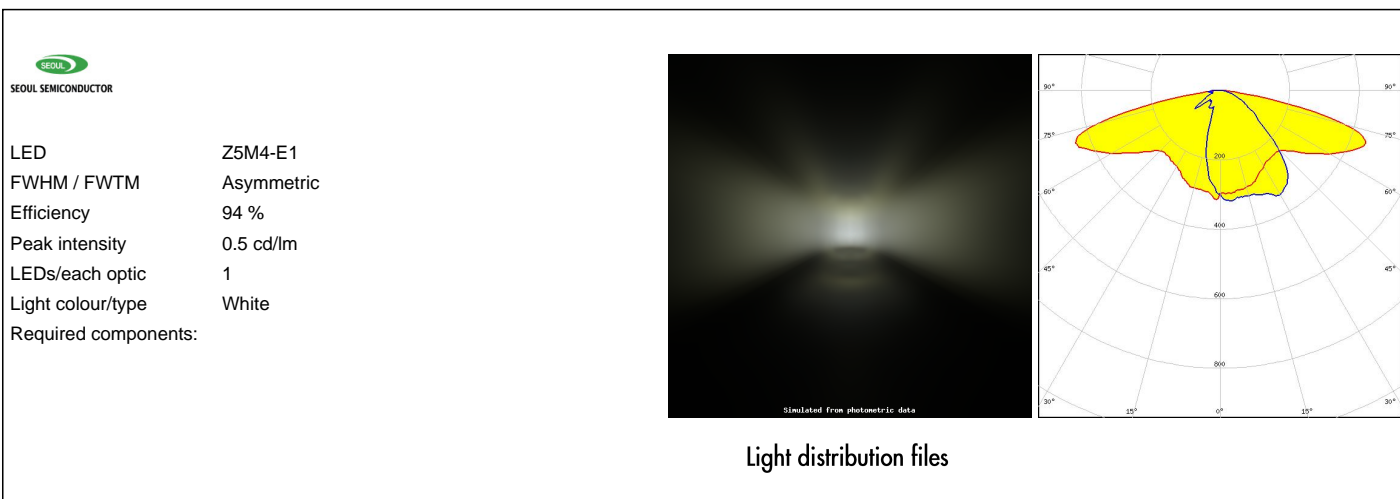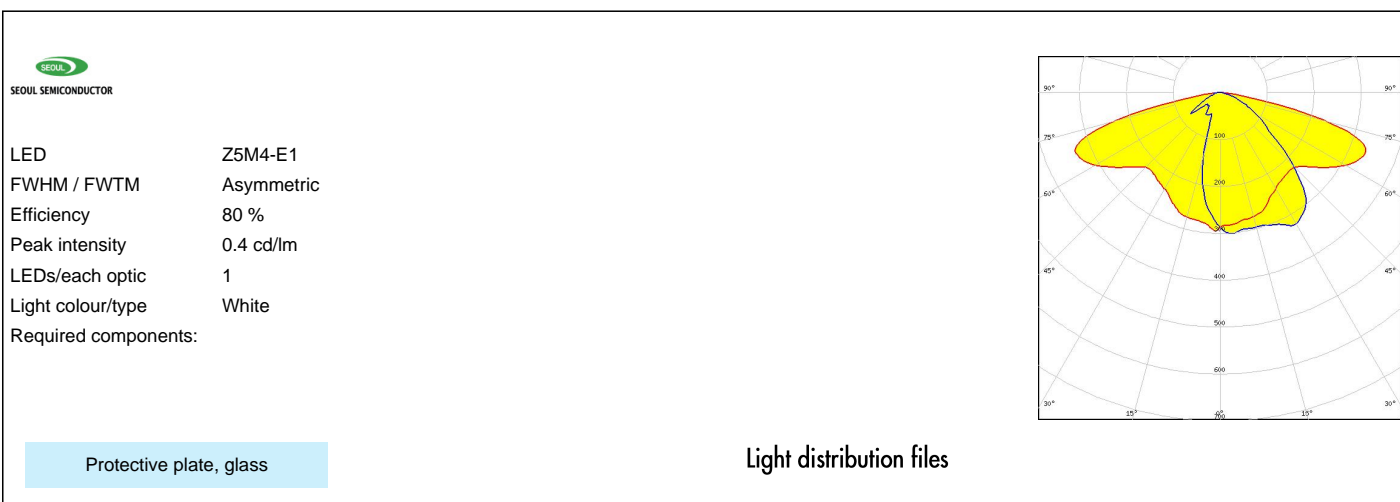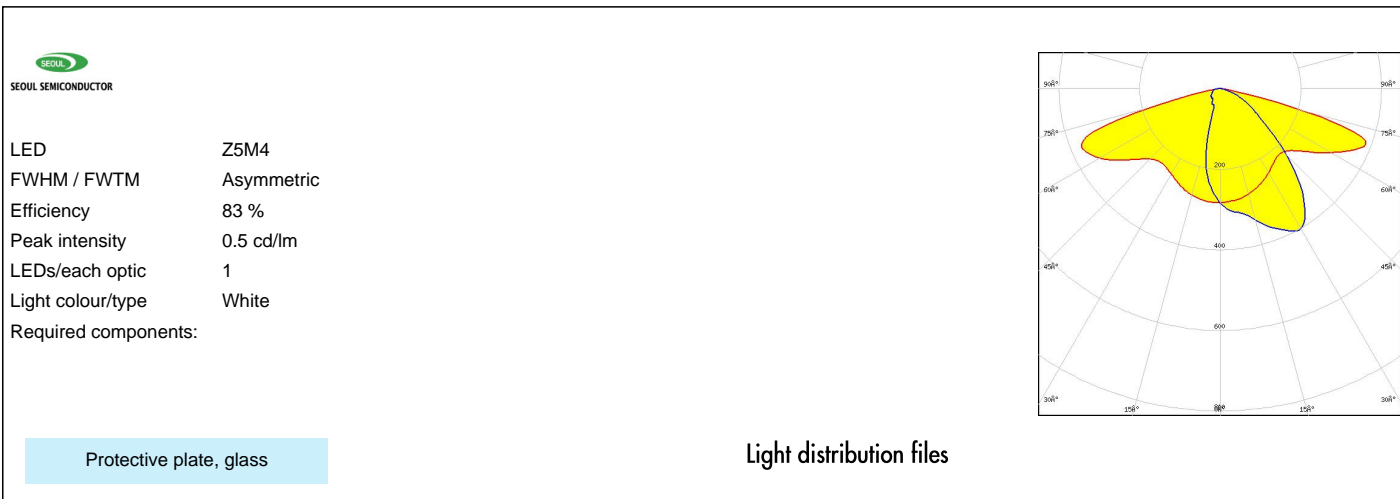

#### OPTICAL RESULTS (SIMULATED):

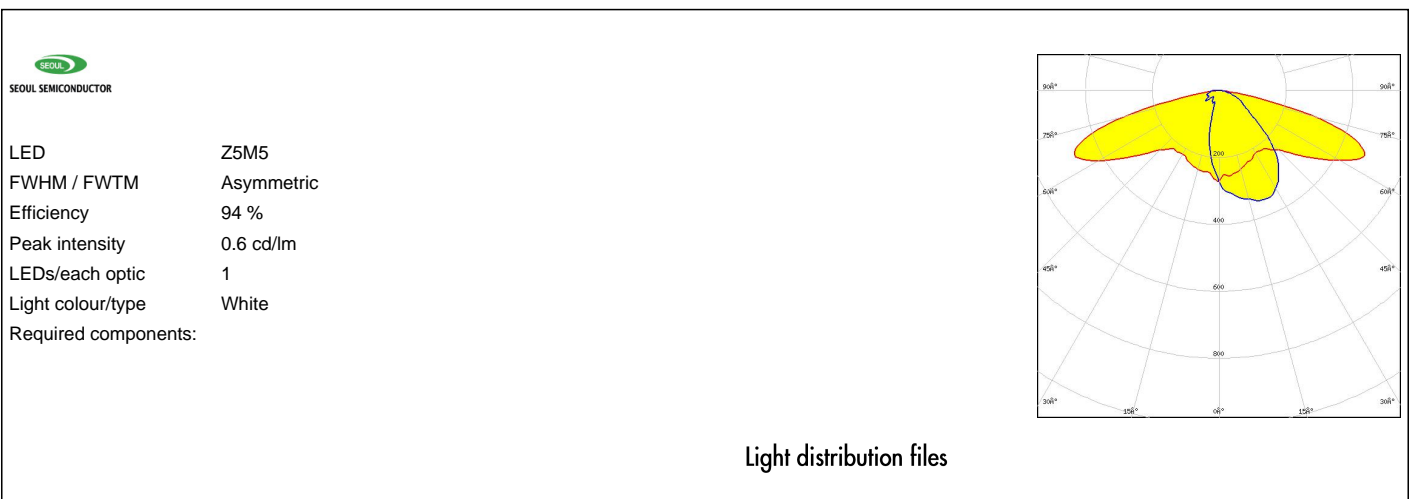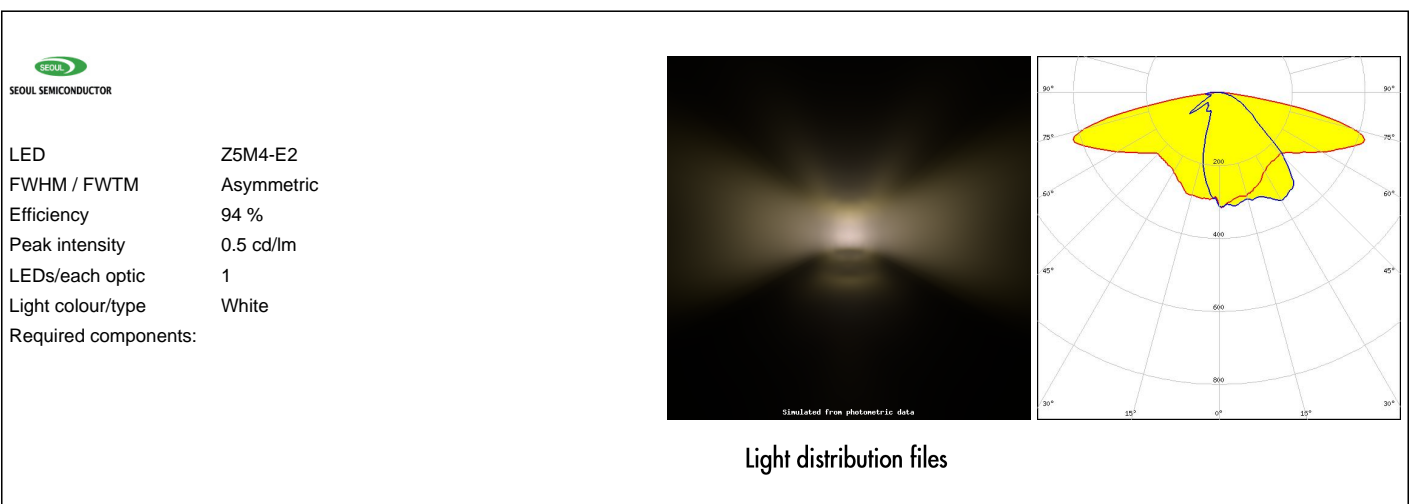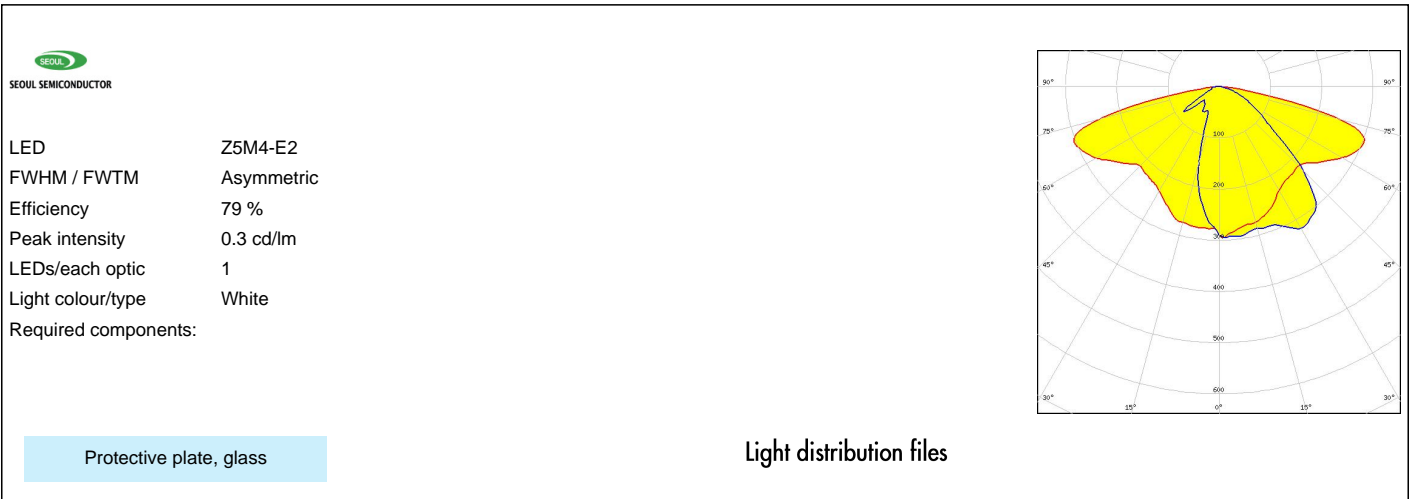


#### OPTICAL RESULTS (SIMULATED):



LED Z5M5  
FWHM / FWTM Asymmetric  
Efficiency 80 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:


Protective plate, glass

Light distribution files

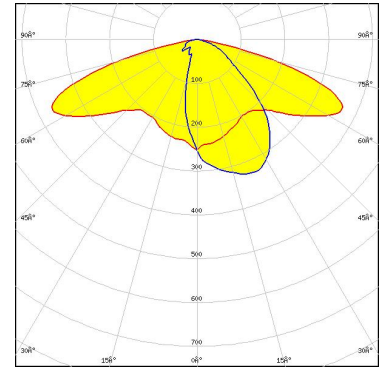

LED Z8Y19  
FWHM / FWTM Asymmetric  
Efficiency 93 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 4  
Light colour/type White  
Required components:

Light distribution files

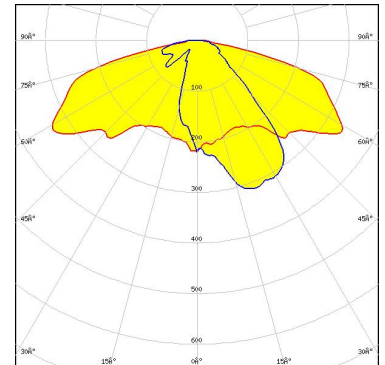


#### TRIDONIC

LED RLE 2x8 4000lm HP EXC2 OTD  
FWHM / FWTM Asymmetric  
Efficiency 83 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

Protective plate, glass

Light distribution files

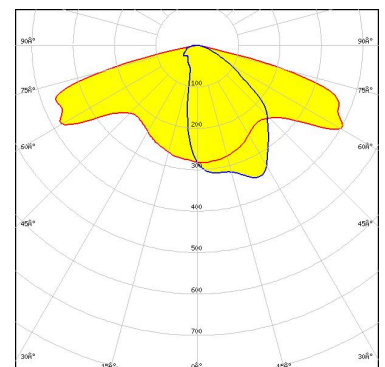

### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 7  
FI-24100 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Poznan, Poland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)