

## HB-IP-24-W


~60° wide beam.

### SPECIFICATION:

Dimensions	173.0 x 71.4
Height	10 mm
Fastening	pin, screw
Ingress protection classes	IP66, IP67
ROHS compliant	yes ⓘ



### MATERIALS:

Component	Type	Material	Colour	Finish	Length
HB-IP-24-W	Multi-lens	PMMA	clear		173.0
STRADA-IP-24-SEAL	Seal	Silicone	white		165.0

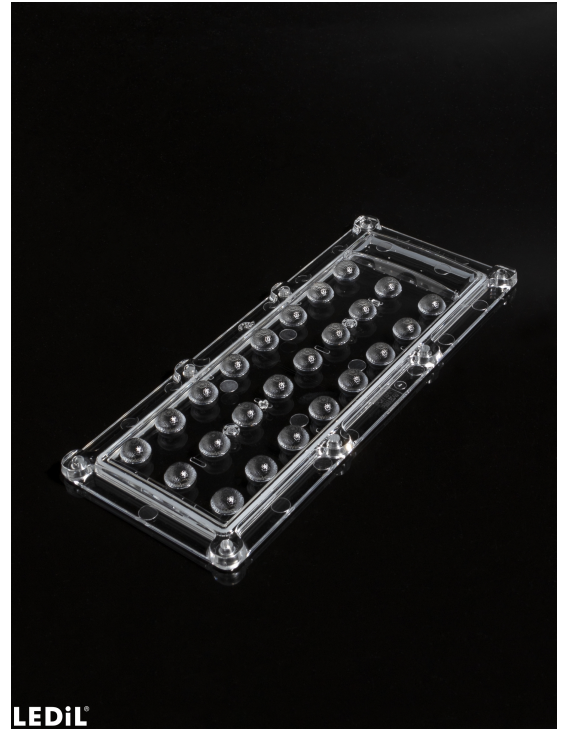

### ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
CS18048_HB-IP-24-W » Box size: 476 x 273 x 247 mm	120	120	40	5.6

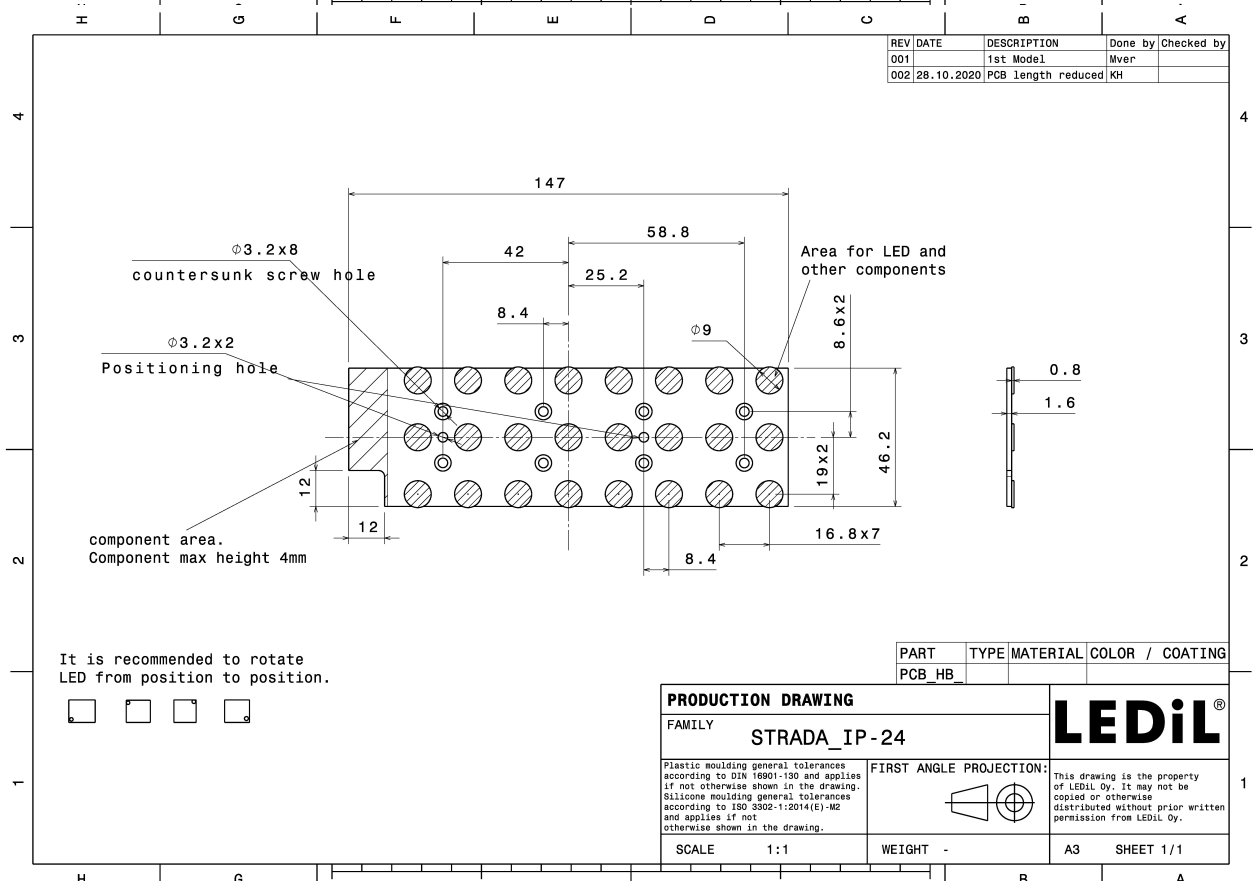
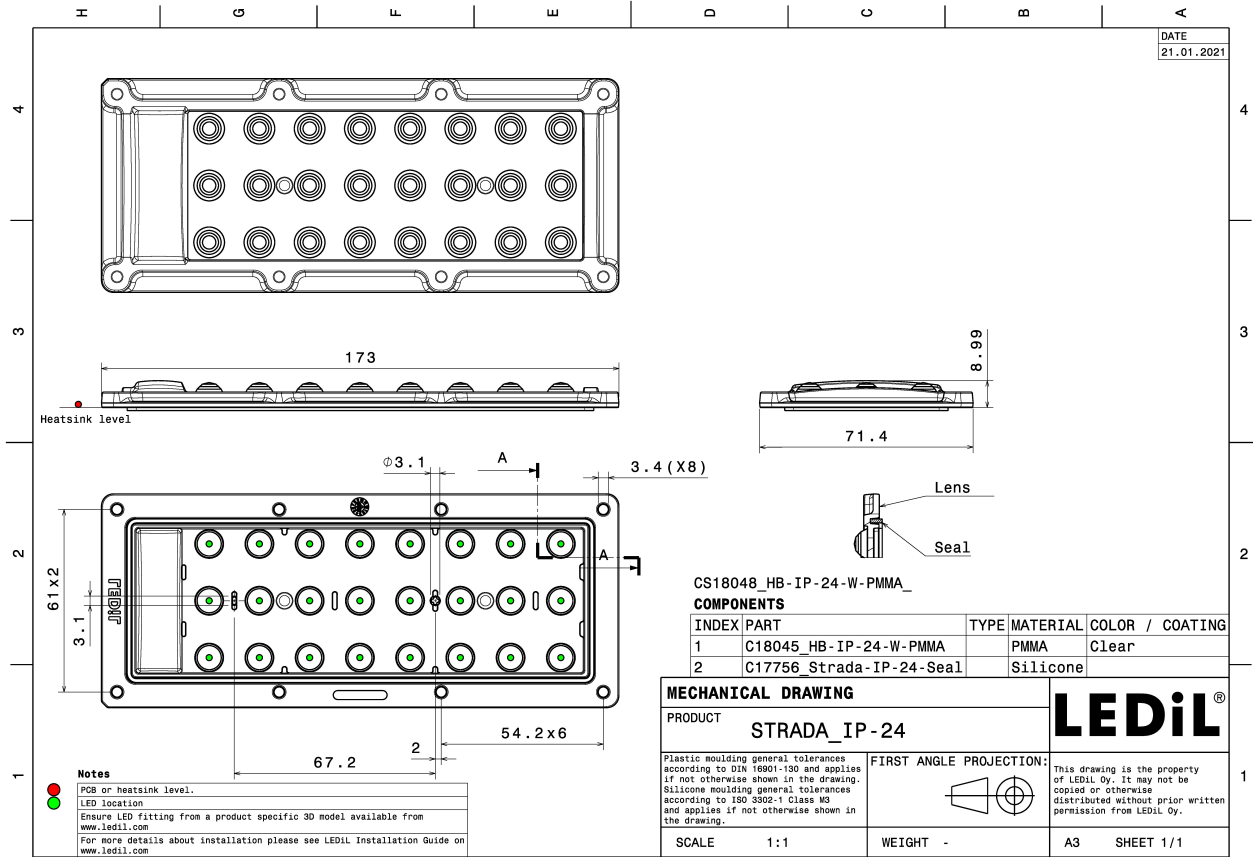


See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)

#### OPTICAL RESULTS (MEASURED):





**LED** LIGHT ENGINE STRADA-IP 24 LEDs 147.4 x 46.2 x 1.5  
**FWHM / FWTM** 68.0° / 90.0°  
**Efficiency** 96 %  
**Peak intensity** 0.9 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

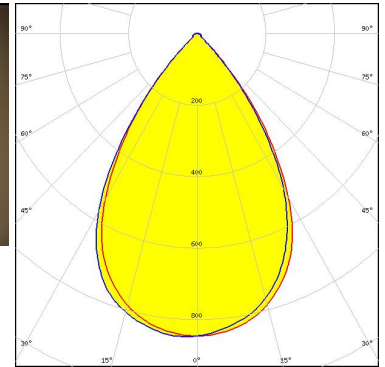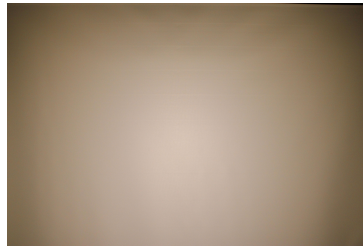

Light distribution files





**LED** LUXEON 5050 HE  
**FWHM / FWTM** 65.0° / 89.0°  
**Efficiency** 96 %  
**Peak intensity** 0.9 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

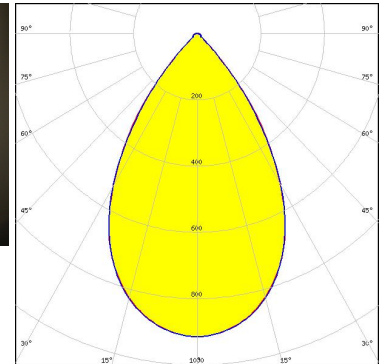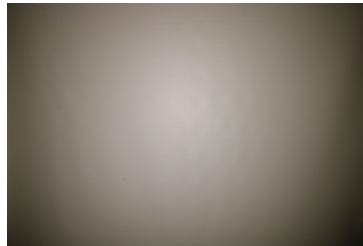

Light distribution files



**LED** LUXEON 5050 Square LES  
**FWHM / FWTM** 65.0° / 88.0°  
**Efficiency** 95 %  
**Peak intensity** 0.9 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

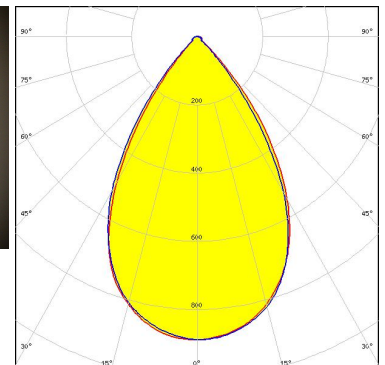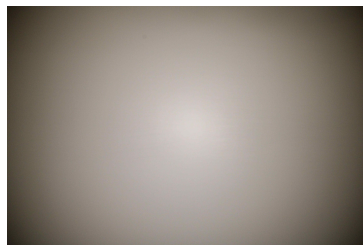


Light distribution files

#### OPTICAL RESULTS (MEASURED):





LED LUXEON XR-5050 HE (L225-xxxx024MLU010)  
FWHM / FWTM 65.0° / 89.0°  
Efficiency 97 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

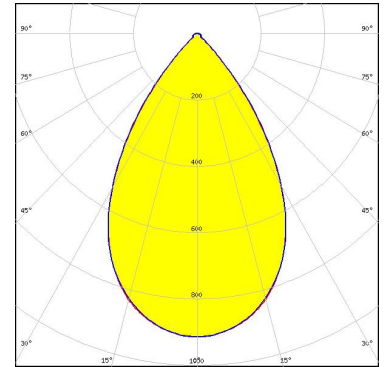

Light distribution files





LED OSCONIQ S 5050  
FWHM / FWTM 68.0° / 90.0°  
Efficiency 95 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

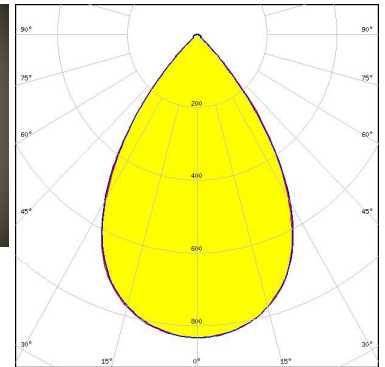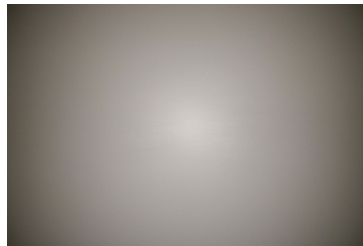

Light distribution files



LED HiLOM RM24 ZP (LH502D)  
FWHM / FWTM 66.0° / 90.0°  
Efficiency 97 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

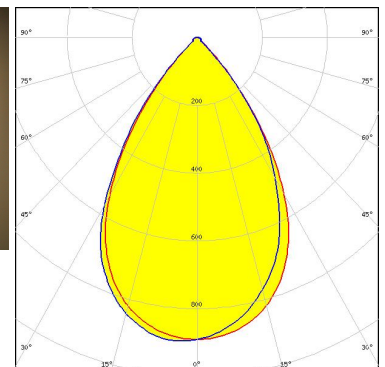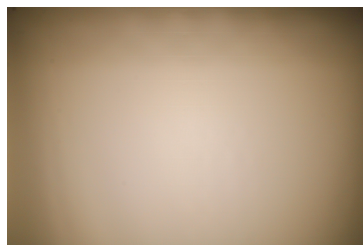



Light distribution files



### OPTICAL RESULTS (MEASURED):

#### TRIDONIC

LED RLE 3x8 6000lm HP HE EXC3 OTD  
FWHM / FWTM 65.0° / 89.0°  
Efficiency 97 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

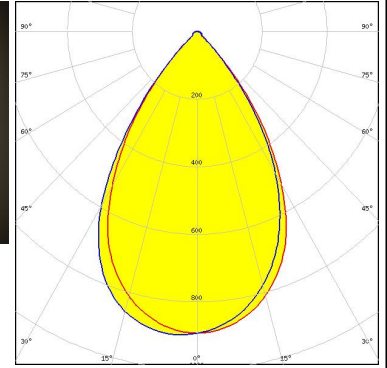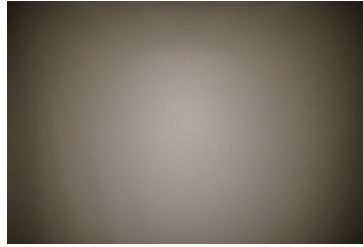


Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED J Series 3030  
FWHM / FWTM 52.0° / 86.0°  
Efficiency 94 %  
Peak intensity 1.2 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

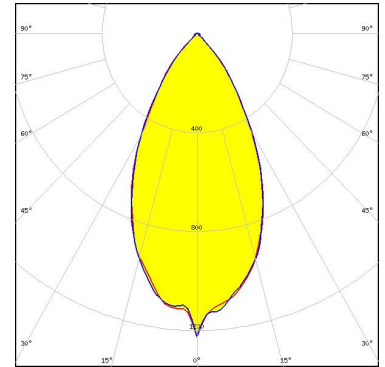


Light distribution files



LED J Series 5050C 6V E Class  
FWHM / FWTM 66.0° / 90.0°  
Efficiency 94 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

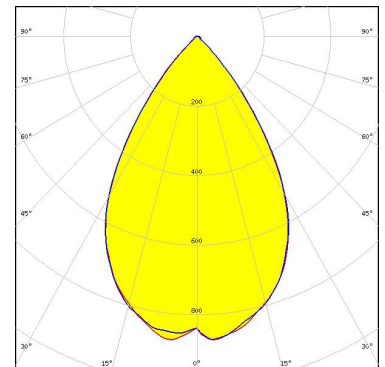

LED LUXEON 5050 HE  
FWHM / FWTM 66.0° / 90.0°  
Efficiency 94 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

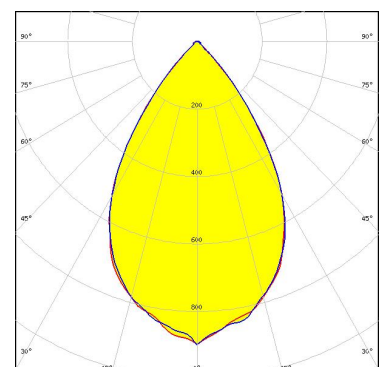


Light distribution files

#### OPTICAL RESULTS (SIMULATED):

**MST** | *Your solutions*


LED RecLED 147x47mm 5800lm 7x0 5050 STRADA-IP-24 G2  
FWHM / FWTM 70.0° / 90.0°  
Efficiency 93 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

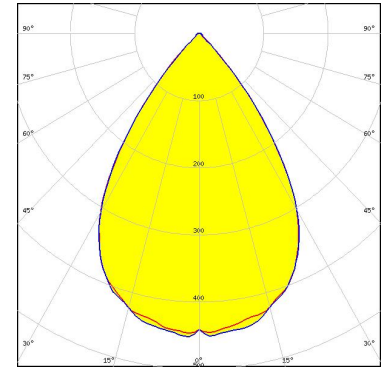

Light distribution files

**NICHIA**


LED NFMW48xA  
FWHM / FWTM 68.0° / 90.0°  
Efficiency 94 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

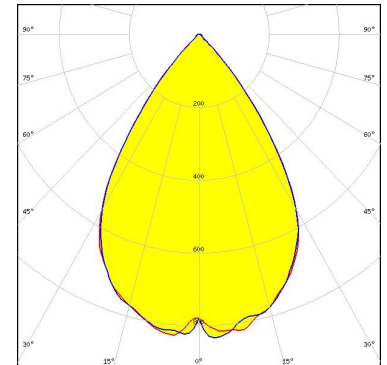

Light distribution files

**OSRAM**  
Opto Semiconductors

LED Duris S8  
FWHM / FWTM 68.0° / 90.0°  
Efficiency 94 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

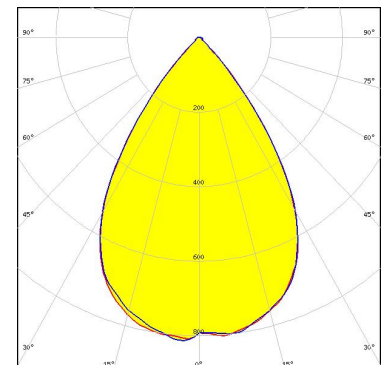


Light distribution files

#### OPTICAL RESULTS (SIMULATED):

### SAMSUNG


LED HiLOM RM24 ZP (LH502C)  
FWHM / FWTM 66.0° / 89.0°  
Efficiency 93 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

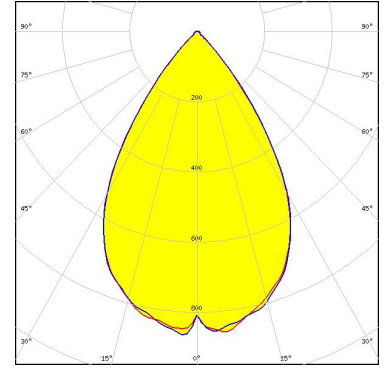

Light distribution files

### SAMSUNG


LED LH502C  
FWHM / FWTM 66.0° / 88.0°  
Efficiency 94 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

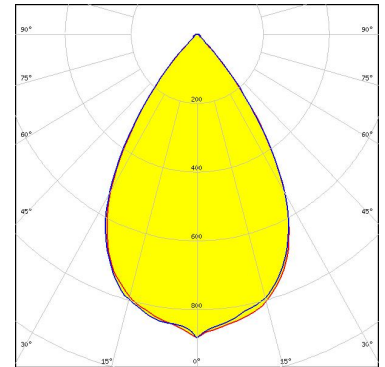

Light distribution files

### SAMSUNG

LED LH502D  
FWHM / FWTM 66.0 + 65.0° / 90.0°  
Efficiency 94 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

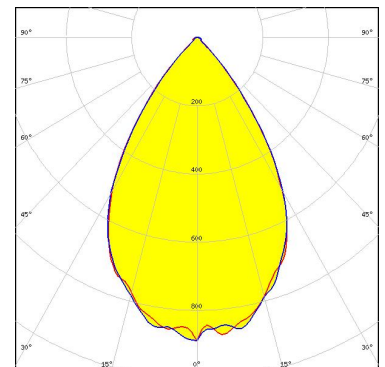


Light distribution files

### OPTICAL RESULTS (SIMULATED):

#### SAMSUNG


LED LH508C  
FWHM / FWTM 66.0° / 88.0°  
Efficiency 91 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

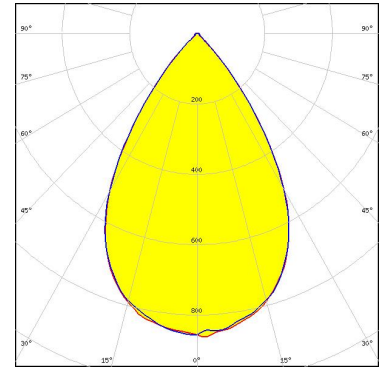

Light distribution files



LED SEOUL DC 5050 6V  
FWHM / FWTM 68.0° / 90.0°  
Efficiency 93 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

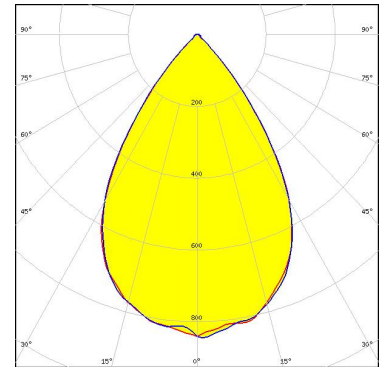

Light distribution files



### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Salo, Finland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)