


EI48/16.8ST Transformers for Printed Boards

For power 10VA.

Designed for the electronics.

Connection method - with pins to printed boards.

- Type - EI/ST
- Input voltage - from 24V to 400V
- Output voltage - from 6V to 24V
- Output voltage - from 2x6V to 2x24V
- Frequency - 50-60HZ
- Isolation class - B/130°C
- Ambient temperature - +70°C
- Protection class - II
- Dielectric strength - 4200V
- Short-circuit protection - (non) proof
- Core type - EI DIN 41302
- IEC Norm - EN 61558

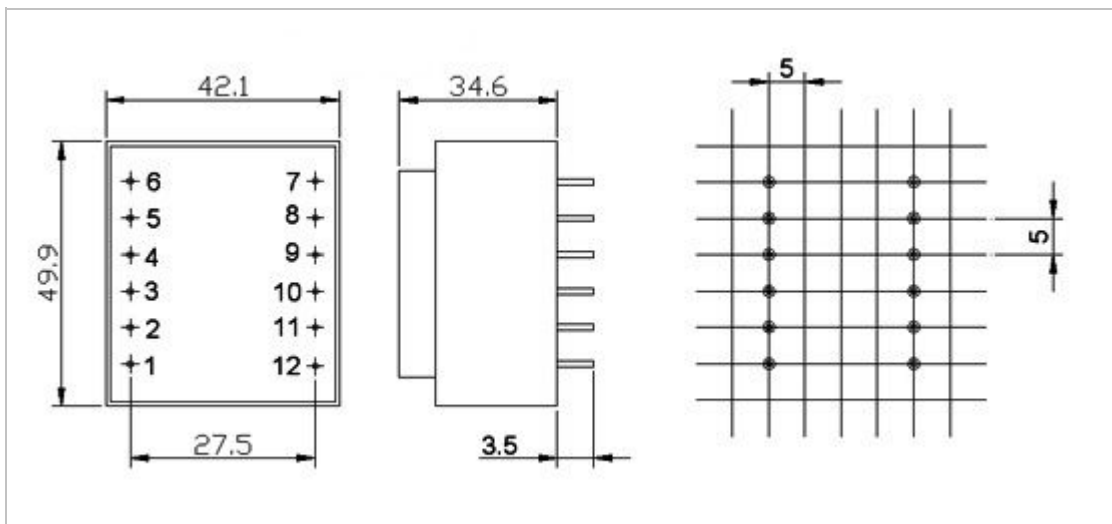

Part. №	Power, VA	Primary voltage, V	Primary № pins	Secondary voltage loaded, V	Secondary current, mA	Secondary № pins	Secondary voltage no load, V
BULTRAF10VA/6V	10	230	1-6	1x6	1667	8-11	1x7.6
BULTRAF10VA/9V	10	230	1-6	1x9	1111	8-11	1x11.4
BULTRAF10VA/12V	10	230	1-6	1x12	833	8-11	1x15
BULTRAF10VA/12V+12V	10	230	1-6	2x12	417	7-8/11-12	2x15
BULTRAF10VA/18V	10	230	1-6	1x18	556	8-11	1x22.6
BULTRAF10VA/24V	10	230	1-6	1x24	416	8-11	1x30.2