

## STELLA-HB

~75° high bay beam for warehouse and outdoor lighting. Compatible with up to 30 mm LES size. Variant with black frame. COBs.

### SPECIFICATION:

Dimensions	Ø 90.0 mm
Height	19.5 mm
Fastening	screw
Ingress protection classes	IP67
ROHS compliant	yes ⓘ




### MATERIALS:

Component	Type	Material	Colour	Finish	Length
STELLA-HB	Single lens	Silicone	clear		85.0
STELLA-FRAME	Holder	PA66	black		90.0

### ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
FN14074_STELLA-HB	Single lens	135	135	15	7.9
» Box size: 480 x 280 x 300 mm					


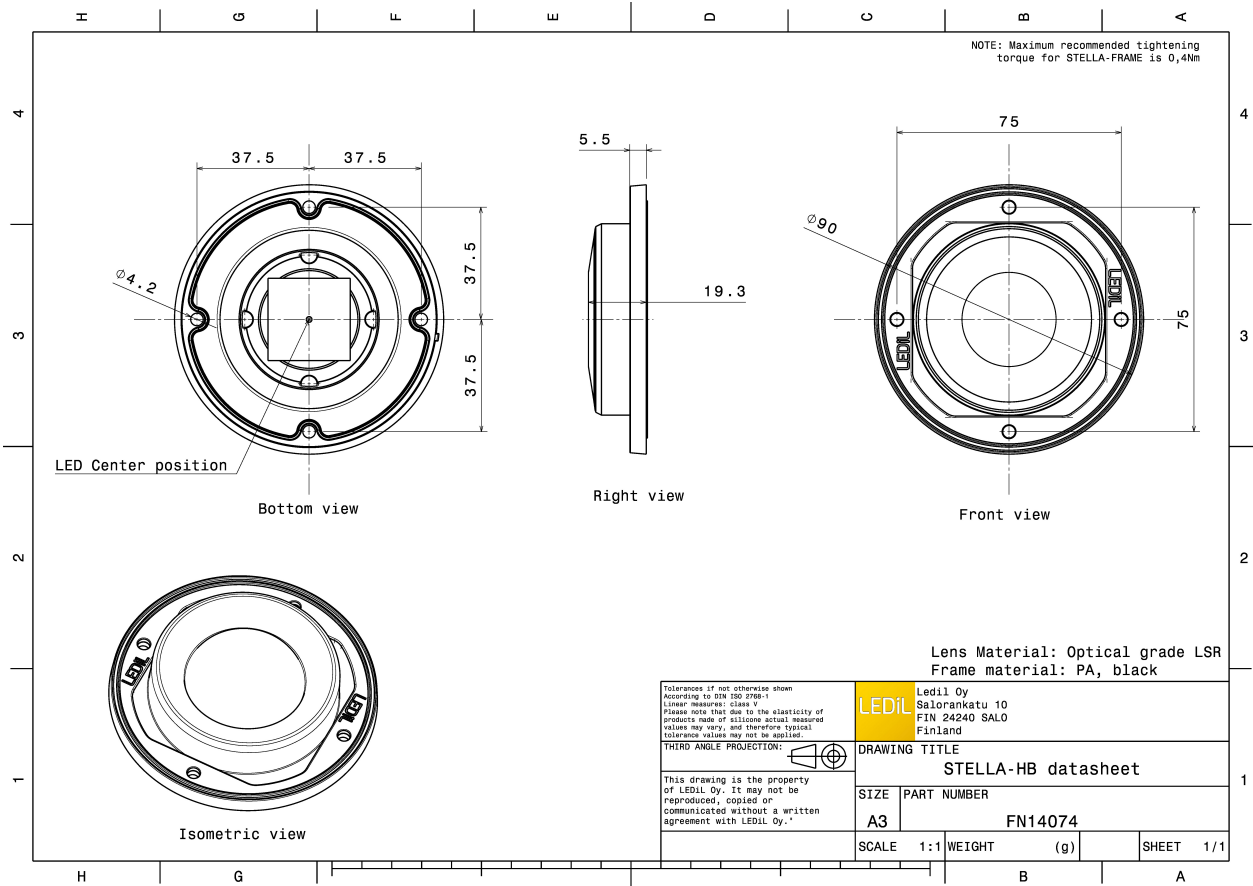


See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)

### OPTICAL RESULTS (MEASURED):





**LED** V18 Gen7  
**FWHM / FWTM** 80.0° / 101.0°  
**Efficiency** 93 %  
**Peak intensity** 0.6 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

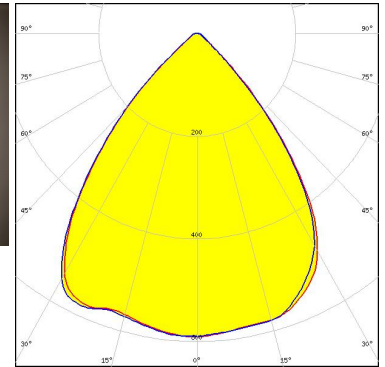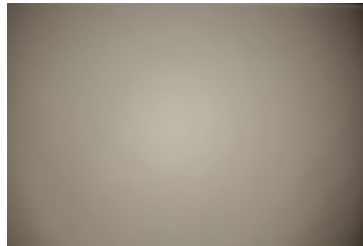

Light distribution files





**LED** V22 Gen7  
**FWHM / FWTM** 75.0° / 101.0°  
**Efficiency** 93 %  
**Peak intensity** 0.7 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

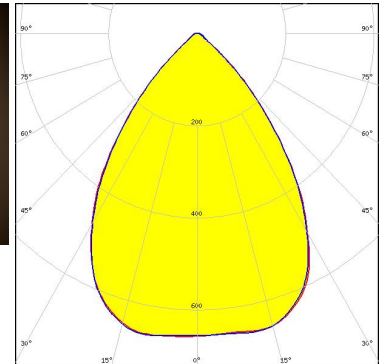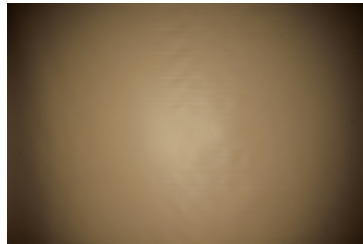

Light distribution files



**LED** VERO18  
**FWHM / FWTM** 75.0° / 96.0°  
**Efficiency** 93 %  
**Peak intensity** 0.7 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

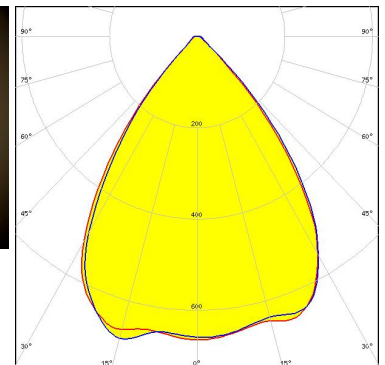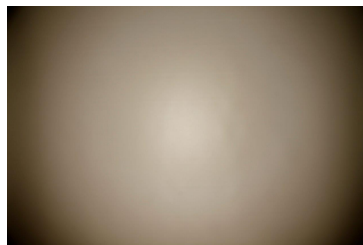


Light distribution files

#### OPTICAL RESULTS (MEASURED):





LED VERO29  
 FWHM / FWTM 69.0° / 104.0°  
 Efficiency 94 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

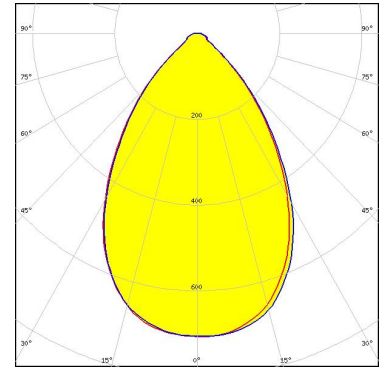

Light distribution files

#### CITIZEN



LED CLL04x/CLU04x  
 FWHM / FWTM 77.0° / 101.0°  
 Efficiency 94 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

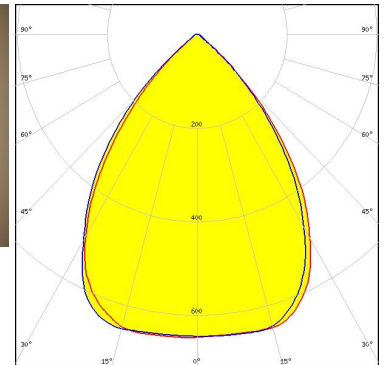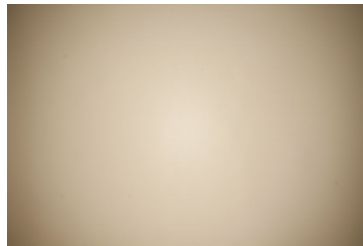

Light distribution files

#### CITIZEN

LED CLL04x/CLU04x  
 FWHM / FWTM 68.0° / 94.0°  
 Efficiency 93 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 Bender Wirth: 431 Typ L4

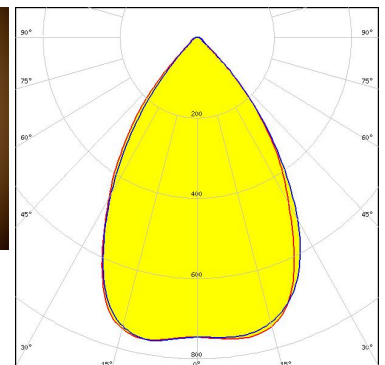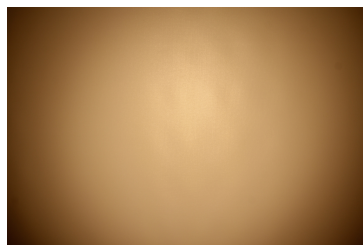


Light distribution files



#### OPTICAL RESULTS (MEASURED):

### CITIZEN


LED CLL05x/CLU05x  
 FWHM / FWTM 73.0° / 110.0°  
 Efficiency 93 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

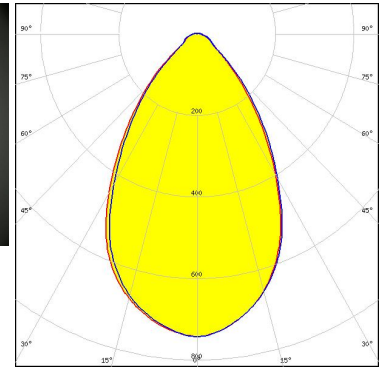

Light distribution files

### CITIZEN



LED CLL05x/CLU05x  
 FWHM / FWTM 65.0° / 103.0°  
 Efficiency 94 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 Bender Wirth: 458 Typ L4

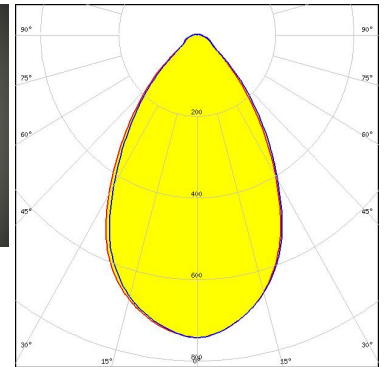

Light distribution files



LED CMA2550  
 FWHM / FWTM 74.0° / 96.0°  
 Efficiency 94 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

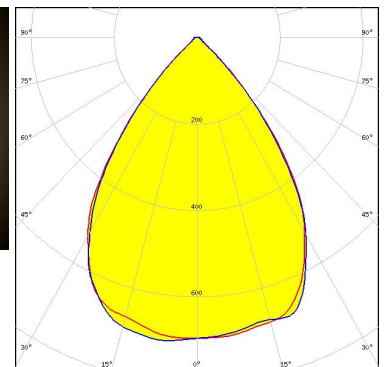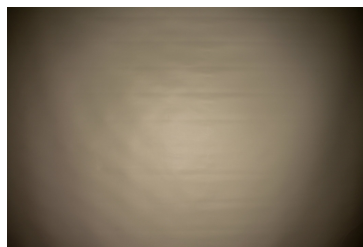


Light distribution files

### OPTICAL RESULTS (MEASURED):





LED CMA3090  
 FWHM / FWTM 67.0° / 96.0°  
 Efficiency 96 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

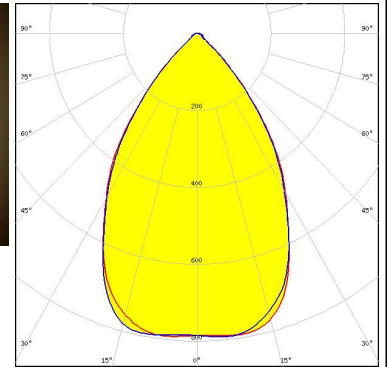

Light distribution files




LED CXA/B 1816 & CXA/B 1820 & CXA 1850  
 FWHM / FWTM 87.0° / 104.0°  
 Efficiency 93 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

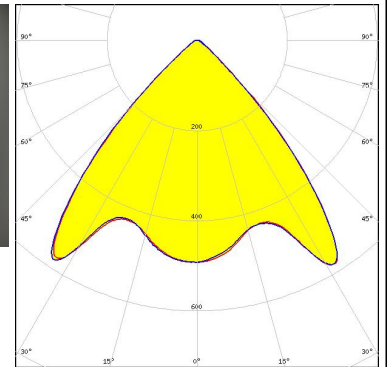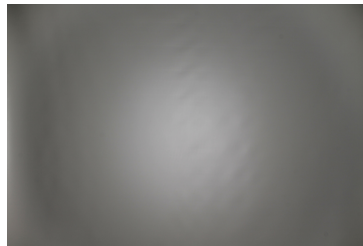

Light distribution files



LED CXA/B 25xx  
 FWHM / FWTM 83.0° / 102.0°  
 Efficiency 93 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

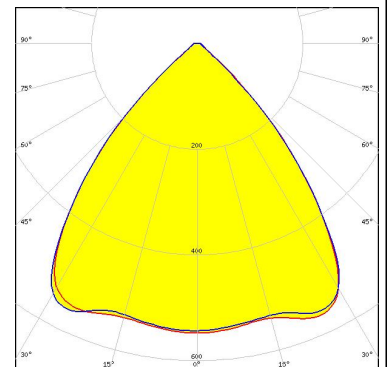


Light distribution files

### OPTICAL RESULTS (MEASURED):




LED CXA/B 30xx  
 FWHM / FWTM 78.0° / 103.0°  
 Efficiency 93 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

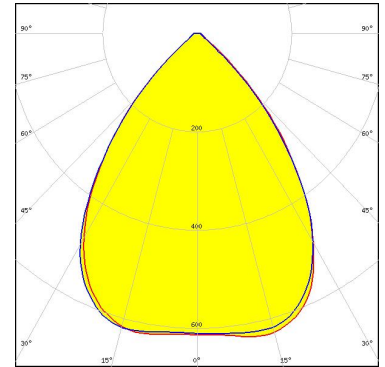

Light distribution files





LED CXA/B 3590  
 FWHM / FWTM 72.0° / 106.0°  
 Efficiency 93 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

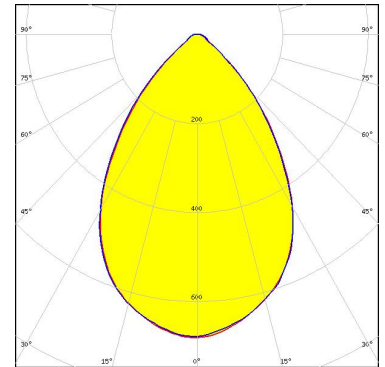

Light distribution files



LED LUXEON CoB 1211  
 FWHM / FWTM 71.0° / 93.0°  
 Efficiency 93 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

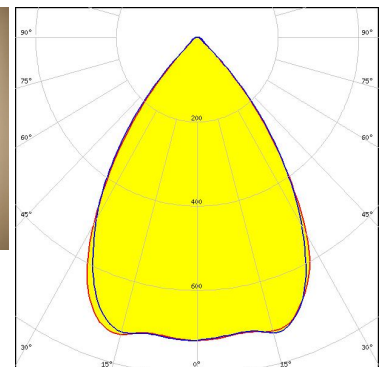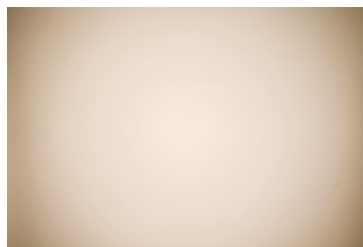


Light distribution files

#### OPTICAL RESULTS (MEASURED):





LED LUXEON CoB 1213/1216/1812  
 FWHM / FWTM 72.0° / 99.0°  
 Efficiency 94 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

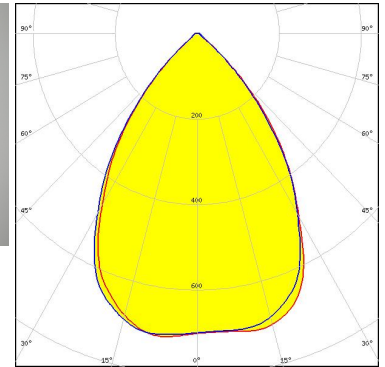

Light distribution files




LED LUXEON CoB 1321  
 FWHM / FWTM 71.0° / 108.0°  
 Efficiency 94 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

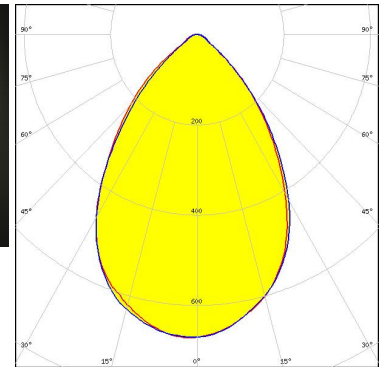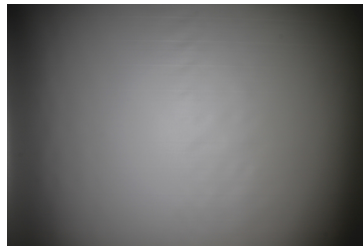

Light distribution files



LED LUXEON CoB 1825  
 FWHM / FWTM 72.0° / 111.0°  
 Efficiency 93 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

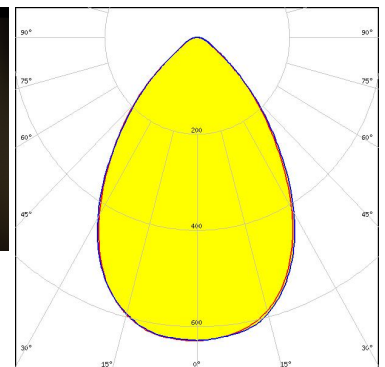


Light distribution files

### OPTICAL RESULTS (MEASURED):




LED CxM-18 (21.5x21.5)  
FWHM / FWTM 80.0° / 100.0°  
Efficiency 93 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

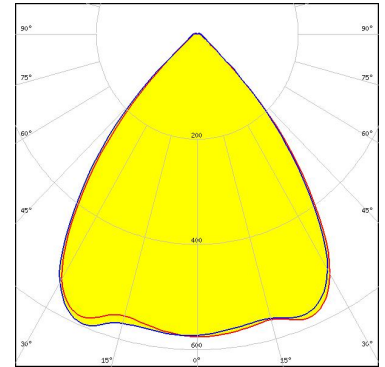

Light distribution files





LED CxM-22 (28x28)  
FWHM / FWTM 73.0° / 100.0°  
Efficiency 93 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

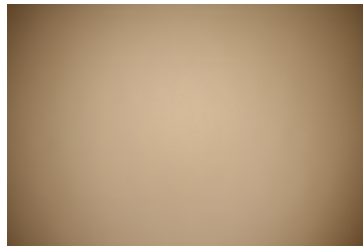

Light distribution files



LED COB H-Type  
FWHM / FWTM 74.0° / 102.0°  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

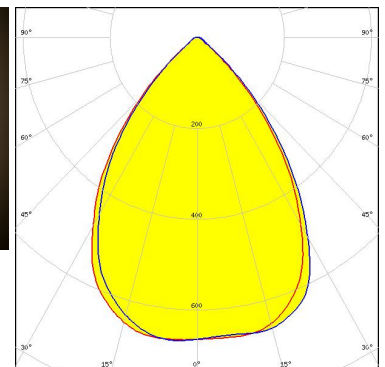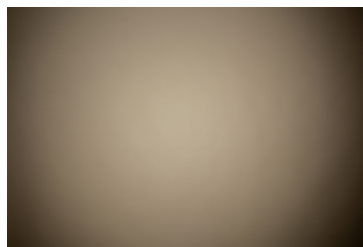


Light distribution files

### OPTICAL RESULTS (MEASURED):




LED COB J-Type  
FWHM / FWTM 84.0° / 102.0°  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

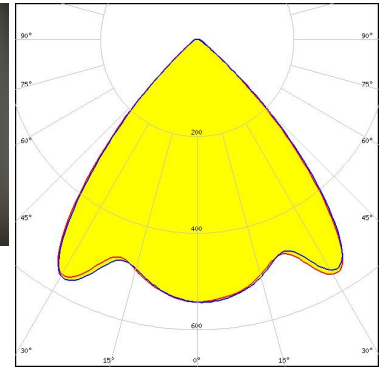

Light distribution files





LED Soleriq S19  
FWHM / FWTM 84.0° / 101.0°  
Efficiency 92 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

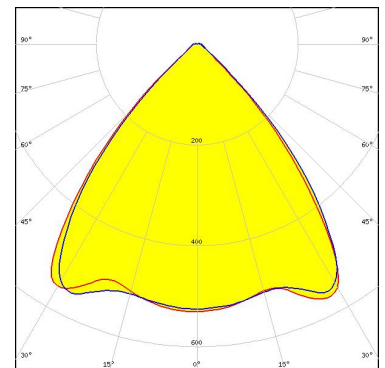

Light distribution files



LED Fortimo SLM L19 CoB  
FWHM / FWTM 71.0° / 94.0°  
Efficiency 94 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
Bender Wirth: 431 Typ L4

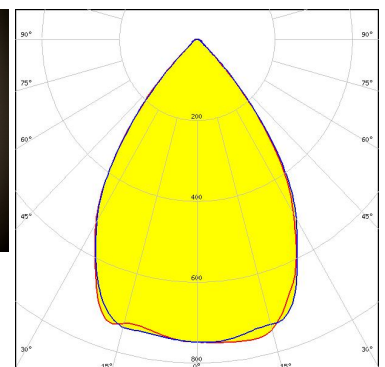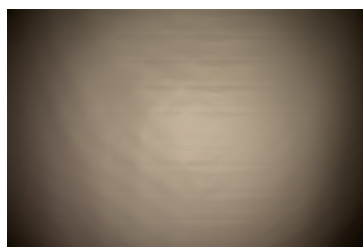


Light distribution files



#### OPTICAL RESULTS (MEASURED):

### PHILIPS



LED Fortimo SLM L23 CoB  
 FWHM / FWTM 67.0° / 96.0°  
 Efficiency 94 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:  
 Bender Wirth: 431 Typ L4

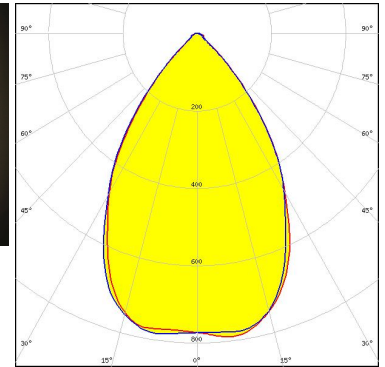

Light distribution files

### SAMSUNG



LED LC016D / LC019D / LC026D / LC033D  
 FWHM / FWTM 83.0° / 101.0°  
 Efficiency 93 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

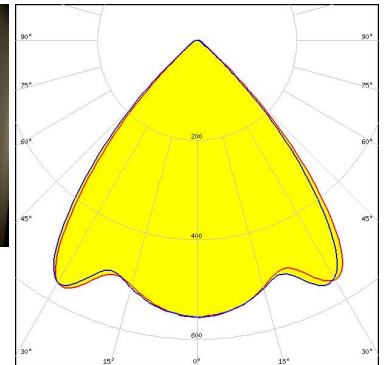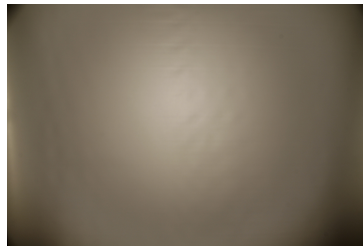

Light distribution files

### SAMSUNG

LED LC040D / LC060D / LC080D  
 FWHM / FWTM 76.0° / 102.0°  
 Efficiency 93 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

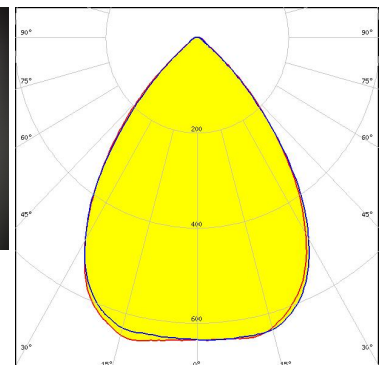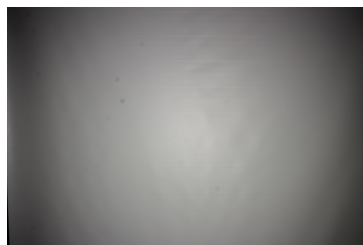


Light distribution files



### OPTICAL RESULTS (MEASURED):

#### SAMSUNG



LED LC040D / LC060D / LC080D  
FWHM / FWTM 77.0° / 104.0°  
Efficiency 93 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

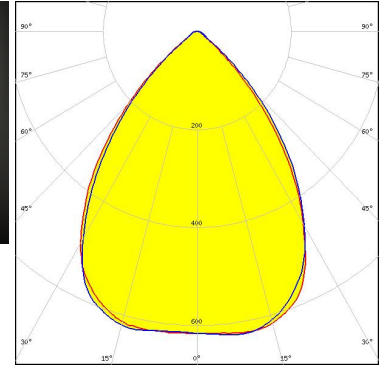

Light distribution files



LED MJT COB LES 33  
FWHM / FWTM 68.0° / 106.0°  
Efficiency 93 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:  
Bender Wirth: 458 Typ L4

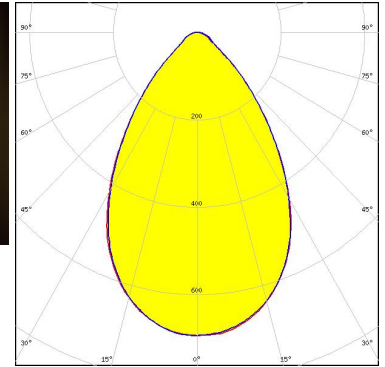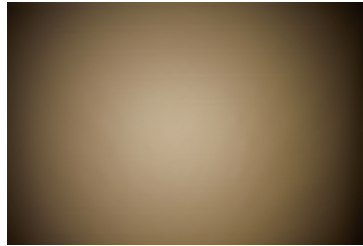


Light distribution files


### OPTICAL RESULTS (SIMULATED):



**LED** V13 Gen 8-9  
**FWHM / FWTM** 78.0° / 94.0°  
**Efficiency** 91 %  
**Peak intensity** 0.7 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

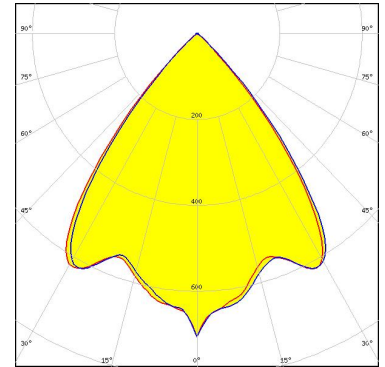


**LED** V18 Gen 8-9  
**FWHM / FWTM** 76.0° / 96.0°  
**Efficiency** 90 %  
**Peak intensity** 0.7 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

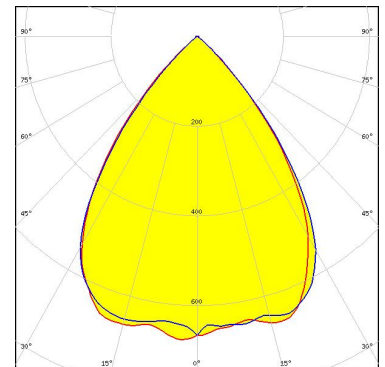

Bender Wirth: 462 Typ L4





**LED** V22 Gen 8-9  
**FWHM / FWTM** 72.0° / 97.0°  
**Efficiency** 90 %  
**Peak intensity** 0.7 cd/lm  
**LEDs/each optic** 1  
**Light colour/type** White  
**Required components:**

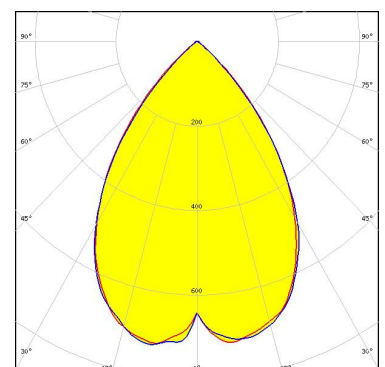

Bender Wirth: 431 Typ L4

### OPTICAL RESULTS (SIMULATED):

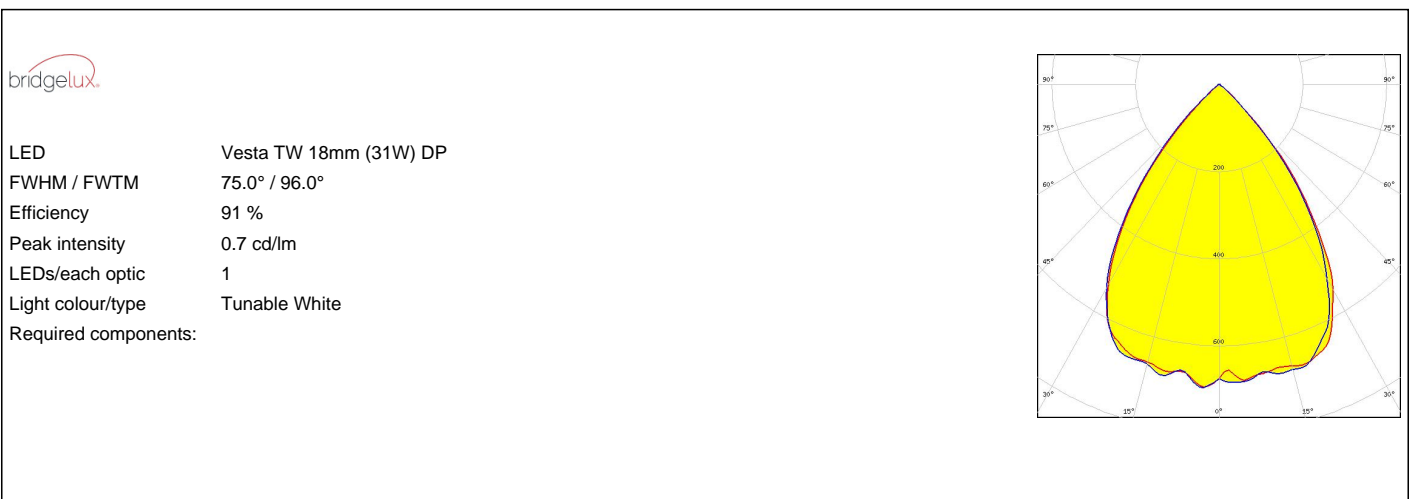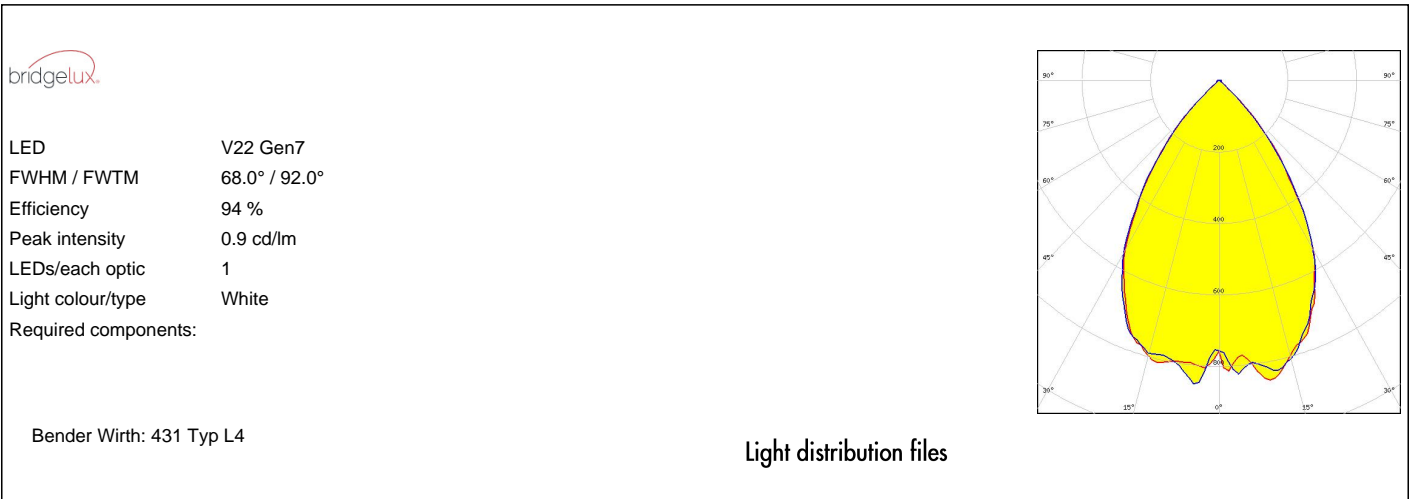


### OPTICAL RESULTS (SIMULATED):



LED Vesta TW 22mm DP  
 FWHM / FWTM 72.0° / 97.0°  
 Efficiency 91 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type Tunable White


Required components:

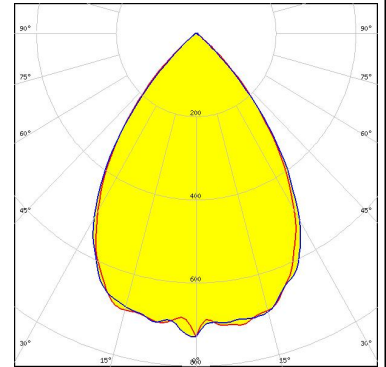

### CITIZEN

LED CLL03x/CLU03x  
 FWHM / FWTM 76.0° / 93.0°  
 Efficiency 96 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White

Required components:

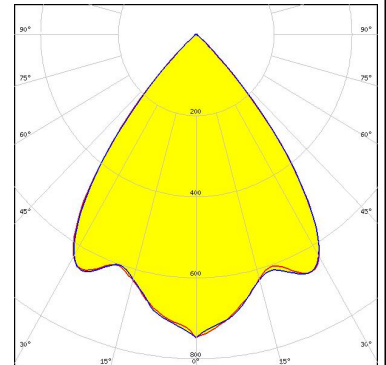


Light distribution files



LED CMA3090  
 FWHM / FWTM 73.0° / 100.0°  
 Efficiency 94 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour/type White

Required components:

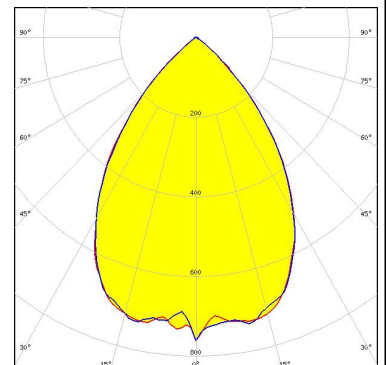


Light distribution files

### OPTICAL RESULTS (SIMULATED):




LED CMT28xx  
FWHM / FWTM 73.0° / 98.0°  
Efficiency 91 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

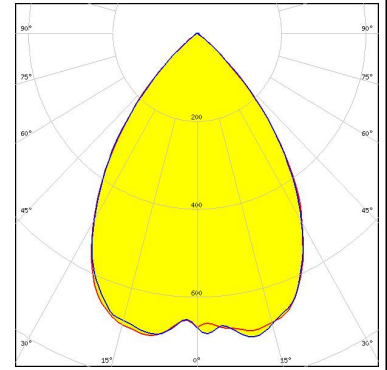

Light distribution files




LED CXM-32  
FWHM / FWTM 68.0° / 104.0°  
Efficiency 96 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

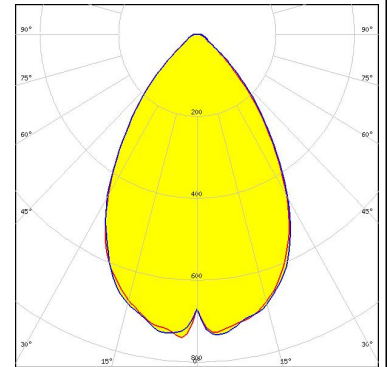

Light distribution files




LED Fortimo SLM L13 CoB  
FWHM / FWTM 78.0° / 92.0°  
Efficiency 91 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

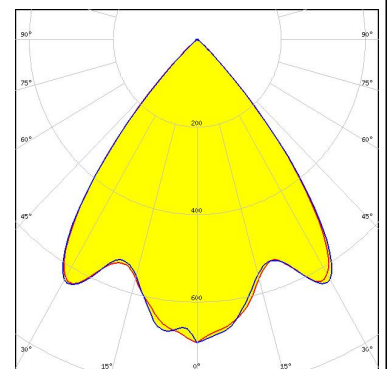

### OPTICAL RESULTS (SIMULATED):


#### TRIDONIC

LED SLE 13mm 3000lm xxx R ADV8  
FWHM / FWTM 82.0° / 96.0°  
Efficiency 91 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

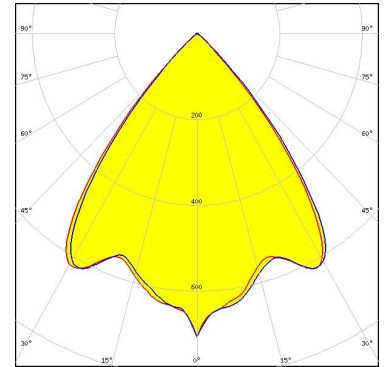

#### TRIDONIC


LED SLE 17mm 5000lm xxx R ADV8  
FWHM / FWTM 78.0° / 98.0°  
Efficiency 91 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

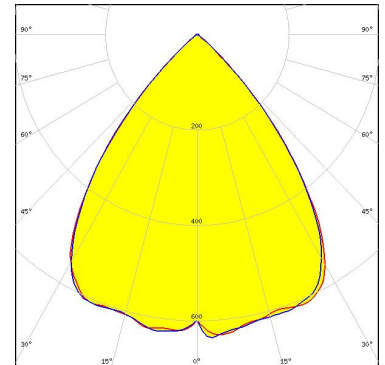

Bender Wirth: 466 Typ L4

#### TRIDONIC

LED SLE 21mm 6000lm xxx R ADV8  
FWHM / FWTM 73.0° / 99.0°  
Efficiency 91 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

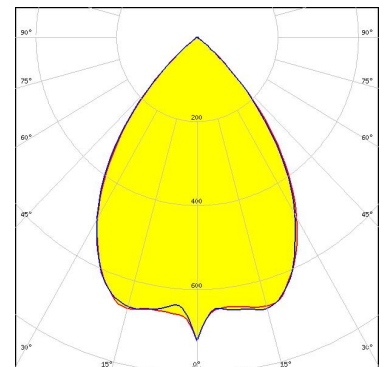

Bender Wirth: 466 Typ L4

### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Poznan, Poland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)