

AMY-70-WW-C

 ${\sim}60^{\circ}$ wide beam. Assembly with holder C compatible with LEDiL HEKLA. Black version.

SPECIFICATION:



MATERIALS:

ComponentTypeMaterialColourFinishAMY-70-WWSingle lensPMMAAMY-70-HLD-CHolderPCblack

ORDERING INFORMATION:

Component Qty in box MOQ MPQ Box weight (kg)

210

210

15


7.4

CP17785_AMY-70-WW-C

» Box size: 480 x 280 x 300 mm




PRODUCT CP17785_AMY-70-WW-C

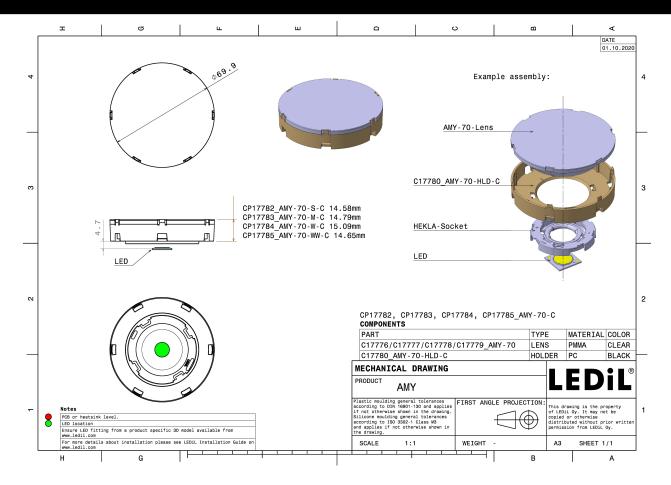

See also our general installation guide: www.ledil.com/installation_guide




OPTICAL RESULTS (MEASURED):

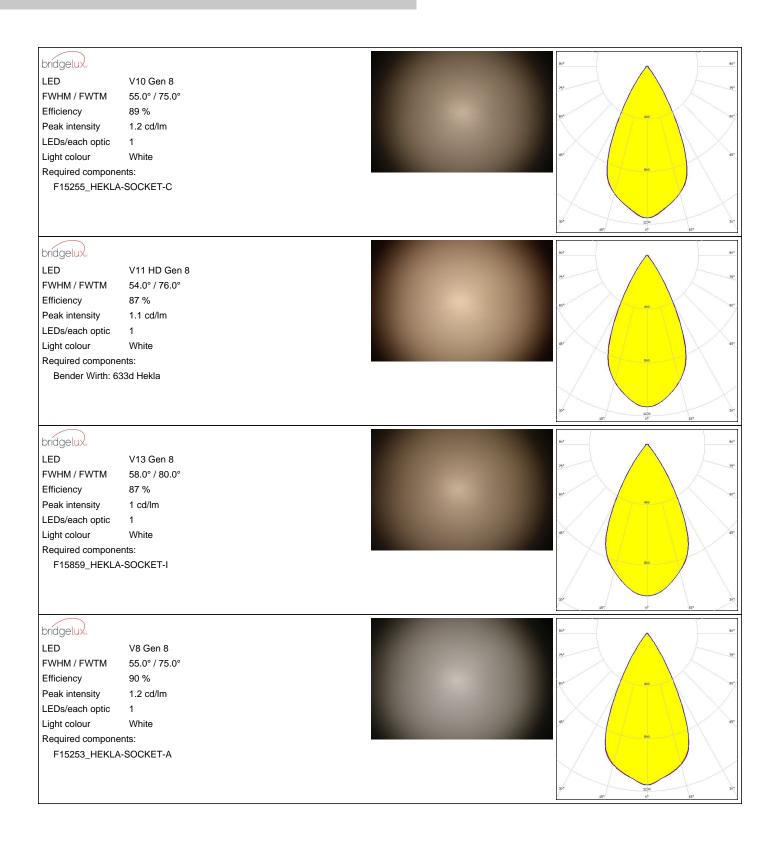




OPTICAL RESULTS (MEASURED):

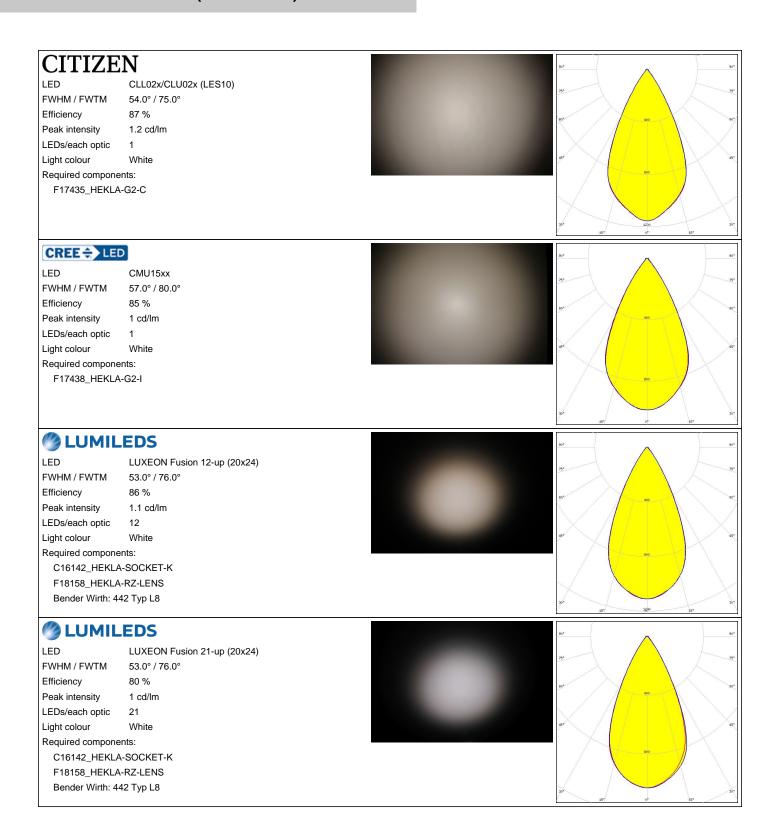



OPTICAL RESULTS (MEASURED):

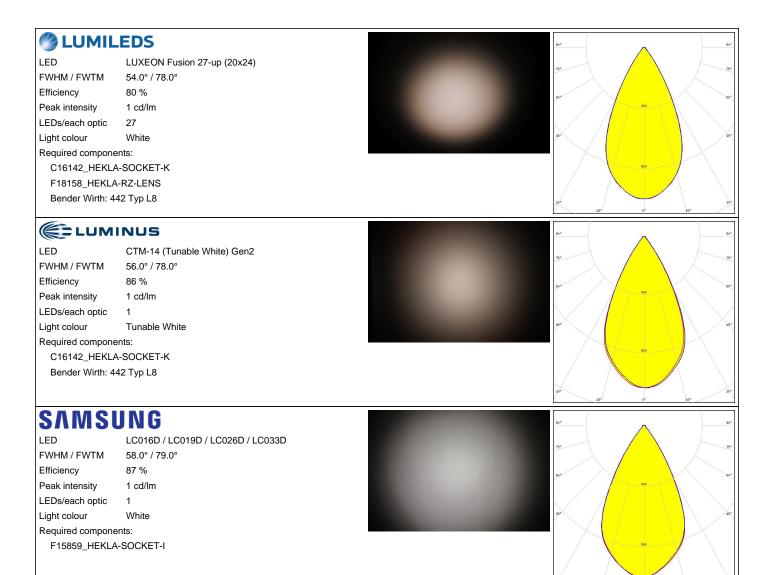



bridgelux

LED V18 Gen 8


 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 62.0° / 86.0°

Efficiency 83 % Peak intensity 0.8 cd/lm

LEDs/each optic White

Light colour Required components:

Bender Wirth: 639b Hekla XL



bridgelux

LED V3 HD Gen 8

FWHM / FWTM 52.0° / 72.0°


Efficiency 91 % Peak intensity 1.3 cd/lm

LEDs/each optic 1

White Light colour

Required components:

F15253_HEKLA-SOCKET-A



bridgelux

LED V3 HD Gen 8 FC

FWHM / FWTM 52.0° / 72.0 + 71.0°


Efficiency 90 % 1.4 cd/lm

Peak intensity LEDs/each optic 1

Light colour White

Required components:

F15255_HEKLA-SOCKET-C



bridgelux.

Light colour


LED V4 HD Gen 8

FWHM / FWTM 53.0 + 54.0° / 72.0°

Efficiency 91 % Peak intensity 1.3 cd/lm LEDs/each optic 1 White

Required components:

F15253_HEKLA-SOCKET-A





bridgelux

LED V6 Gen 8

FWHM / FWTM 55.0° / 74.0°


Efficiency 90 %

Peak intensity 1.2 cd/lm

LEDs/each optic 1
Light colour White

Required components:

F15253_HEKLA-SOCKET-A



bridgelux

LED V6 HD Gen 8


FWHM / FWTM 52.0° / 73.0 + 72.0° Efficiency 90 %

Peak intensity 1.3 cd/lm

LEDs/each optic 1
Light colour White

Required components:

F15255_HEKLA-SOCKET-C



bridgelux

LED V8 Gen7
FWHM / FWTM 55.0° / 74.0°

Efficiency 87 %


Peak intensity 1.2 cd/lm

LEDs/each optic 1

Light colour White

Required components:

F15253_HEKLA-SOCKET-A



bridgelux.


LED V9 HD Gen 8 FWHM / FWTM 54.0° / 74.0°

Efficiency 89 %
Peak intensity 1.2 cd/lm

LEDs/each optic 1
Light colour White

Required components:

F15859_HEKLA-SOCKET-I



7/16



bridgelux

LED VERO10

FWHM / FWTM 54.0° / 74.0°

Efficiency 87 %


Peak intensity 1.2 cd/lm

LEDs/each optic 1

Light colour White

Required components:

F15616_HEKLA-SOCKET-F



bridgelux.

LED VERO13


FWHM / FWTM 56.0° / 76.0° Efficiency 85 %

Peak intensity 1.1 cd/lm

LEDs/each optic 1
Light colour White

Required components:

C16142_HEKLA-SOCKET-K



bridgelux

LED VERO18


FWHM / FWTM 62.0° / 88.0°

Efficiency 87 %
Peak intensity 0.9 cd/lm

LEDs/each optic 1

Light colour White

Required components: C16142_HEKLA-SOCKET-K



bridgelux.

LED Vesta DTW 13mm (21W)


FWHM / FWTM 53.0° / 74.0°

Efficiency 89 %
Peak intensity 1.3 cd/lm

LEDs/each optic 1
Light colour White

Required components:

Bender Wirth: 632b Hekla XL



8/16



bridgelux


LED Vesta DTW 15mm (33W)

FWHM / FWTM $55.0 + 54.0^{\circ} / 79.0^{\circ}$

Efficiency 87 % Peak intensity 1.1 cd/lm LEDs/each optic Light colour White

Required components:

Bender Wirth: 632b Hekla XL




bridgelux

LED Vesta DTW 6mm

FWHM / FWTM 53.0 + 54.0° / 73.0 + 74.0°

Efficiency 89 % Peak intensity 1.2 cd/lm LEDs/each optic 1 White Light colour

Required components: Bender Wirth: 652b Hekla




bridgelux

LED Vesta DTW 9mm (4W/6W/12W)

FWHM / FWTM 53.0° / 74.0° Efficiency 89 % Peak intensity 1.2 cd/lm LEDs/each optic 1

Light colour White Required components:

Bender Wirth: 652b Hekla




bridgelux.

LED Vesta TW 13mm (18W) DP FWHM / FWTM $55.0 + 54.0^{\circ} / 78.0 + 76.0^{\circ}$

Efficiency 87 % Peak intensity 1.1 cd/lm LEDs/each optic

Tunable White Light colour

Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 492 Typ L8





bridgelux


LED Vesta TW 15mm DP FWHM / FWTM 57.0° / 79.0 + 80.0°

Efficiency 86 %
Peak intensity 1 cd/lm
LEDs/each optic 1

Light colour Tunable White

Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 482 Typ L8



bridgelux


LED Vesta TW 9mm (9W) DP

FWHM / FWTM 54.0° / 78.0° Efficiency 90 % Peak intensity 1.2 cd/lm LEDs/each optic 1

Light colour Tunable White

Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 489 Typ L8



CITIZEN

 LED
 CLL03x/CLU03x


 FWHM / FWTM
 56.0° / 78.0°

 Efficiency
 85 %

 Peak intensity
 1 cd/lm

Peak intensity 1 cd/lr
LEDs/each optic 1
Light colour White
Required components:

F15859_HEKLA-SOCKET-I



CITIZEN

Required components:

LED CLU700/701/702/703

FWHM / FWTM 52.0° / 72.0°


Efficiency 89 %

Peak intensity 1.3 cd/lm

LEDs/each optic 1

Light colour White

F15255_HEKLA-SOCKET-C





CITIZEN


LED CLU700/701/702/703

White

FWHM / FWTM 52.0° / 72.0°
Efficiency 88 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1

Light colour
Required components:

F15255_HEKLA-SOCKET-C



CREE + LED


LED CMA1825

FWHM / FWTM 56.0° / 78.0°
Efficiency 86 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1

Light colour White

F15254_HEKLA-SOCKET-B

Required components:




CREE + LED

LED CMT14xx

FWHM / FWTM 54.0° / 75.0° Efficiency 86 %

Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White

Required components: F17435_HEKLA-G2-C



CREE - LED


LED CMU10xx

FWHM / FWTM 55.0° / 76.0°
Efficiency 87 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1

White

Required components: F17435_HEKLA-G2-C

Light colour





CREE \$\text{LED}


LED CXA/B 15xx

FWHM / FWTM 55.0 + 54.0° / 74.0°

Efficiency 86 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15256_HEKLA-SOCKET-D



CREE + LED


LED CXA/B 1830 FWHM / FWTM 56.0° / 79.0°

Efficiency 86 %

Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White

Required components:

Bender Wirth: 637b Hekla



MUMILEDS


LED LUXEON CoB 1202/1203

FWHM / FWTM 54.0° / 74.0 + 76.0°

Efficiency 89 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15858_HEKLA-SOCKET-H




MUMILEDS

LED LUXEON CoB 1202HD

FWHM / FWTM 54.0° / 74.0°
Efficiency 90 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15848_HEKLA-SOCKET-G








LED LUXEON CoB 1204/1205

FWHM / FWTM 55.0 + 56.0° / 77.0 + 78.0°

Efficiency 88 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White

Bender Wirth: 632a Hekla XL

Required components:




M LUMILEDS

LED LUXEON CoB 1204HD FWHM / FWTM 54.0° / 74.0 + 76.0°

Efficiency 89 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15858_HEKLA-SOCKET-H




MILEDS

LED LUXEON CoB 1208 FWHM / FWTM 56.0° / 78.0 + 79.0°

Efficiency 88 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Bender Wirth: 632a Hekla XL




MILEDS

LED LUXEON CX Plus CoB - HD S04H9

FWHM / FWTM 54.0° / 76.0°
Efficiency 87 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White

F15255_HEKLA-SOCKET-C

Required components:







LED CxM-14 (19x19)

FWHM / FWTM 58.0° / 81.0°


Efficiency 84 %

Peak intensity 1 cd/lm

LEDs/each optic 1

Light colour White

Required components: F17438_HEKLA-G2-I



WNICHIA

LED COB L-Type (LES 11)

FWHM / FWTM 56.0° / 77.0°

Efficiency 86 %


Peak intensity 1.1 cd/lm

LEDs/each optic 1

Light colour White

Required components: F17437_HEKLA-G2-H

hite



OSRAM

LED PrevaLED Core G7 LES15 CoB


FWHM / FWTM 58.0° / 80.0°

Efficiency 85 %

Peak intensity 1 cd/lm LEDs/each optic 1

Light colour White

Required components: F17438_HEKLA-G2-I



SAMSUNG


LED LC003D / LC006D / LC009D / LC013D

FWHM / FWTM 54.0° / 76.0 + 75.0°

Efficiency 88 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15255_HEKLA-SOCKET-C






SAMSUNG

LC020T (Tunable white)

FWHM / FWTM 56.0° / 76.0° Efficiency 86 % Peak intensity 1.1 cd/lm LEDs/each optic

Light colour White Required components:

F15859_HEKLA-SOCKET-I




SAMSUNG

LED LC020T (Tunable white)

FWHM / FWTM 56.0° / 76.0° Efficiency 87 % Peak intensity 1.1 cd/lm LEDs/each optic 1 White Light colour

Required components:

F15859_HEKLA-SOCKET-I



TRIDONIC


SLE G7 LES13

FWHM / FWTM 56.0° / 78.0° Efficiency 86 % Peak intensity 1 cd/lm

LEDs/each optic 1 Light colour White

Required components:

F15859_HEKLA-SOCKET-I




XICATO

XOB 14.5 mm FWHM / FWTM 55.0° / 76.0°

Efficiency 79 % Peak intensity 1 cd/lm LEDs/each optic White Light colour

Required components: F17438_HEKLA-G2-I





PRODUCT DATASHEET CP17785 AMY-70-WW-C

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

16/16

www.ledil.com/ where_to_buy