



MOSFET (N-CHANNEL)

FEATURES

- λ Low On-Resistance:  $R_{DS(ON)}$
- λ Low Gate Threshold Voltage
- λ Low Input Capacitance
- λ Fast Switching Speed
- λ Low Input/Output Leakage



SOT-23

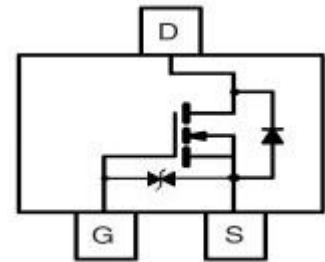

MECHANICAL DATA

- λ Case: SOT-23
- λ Case Material: Molded Plastic. UL flammability
- λ Classification Rating: 94V-0
- λ Weight: 0.008 grams (approximate)

MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$  unless otherwise noted)







Parameter	Symbol	Value	Unit
Drain-source voltage	$V_{DS}$	60	V
Gate-source voltage	$V_{GS}$	$\pm 20\text{V}$	V
Continuous drain current	$I_D$	340	mA
Pulsed drain current (Note 1)	$I_{DM}$	800	mA
Power dissipation	$P_D$	0.35	W
Thermal resistance from Junction to ambient	$R_{\theta JA}$	357	$^\circ\text{C/W}$
Junction And Storage temperature Range	$T_J, T_{STG}$	-65 ~ +150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$  unless otherwise specified)

Parameter	Symb	Min	Typ	Max	Unit	Conditions
<b>Static Characteristics</b>						
Drain-Source breakdown voltage	$V_{(BR)DSS}$	60			V	$V_{GS}=0\text{V}, I_D=250\mu\text{A}$
Gate-threshold voltage (note 1)	$V_{GS(th)}$	1	1.3	2.5	V	$V_{DS}=V_{GS}, I_D=1\text{mA}$
Zero gate voltage drain current	$I_{DSS}$			1	$\mu\text{A}$	$V_{DS}=48\text{V}, V_{GS}=0\text{V}$
Gate-body leakage current	$I_{GSS}$			$\pm 10$	$\mu\text{A}$	$V_{DS}=0\text{V}, V_{GS}=\pm 20\text{V}$
				$\pm 200$	nA	$V_{DS}=0\text{V}, V_{GS}=\pm 10\text{V}$
				$\pm 100$	nA	$V_{DS}=0\text{V}, V_{GS}=\pm 5\text{V}$
Drain-source on-resistance (note 1)	$R_{DS(ON)}$		1.1	5.3	$\Omega$	$V_{GS}=4.5\text{V}, I_D=0.2\text{A}$
			0.9	5	$\Omega$	$V_{GS}=10\text{V}, I_D=0.5\text{A}$
Diode forward voltage (note 1)	$V_{SD}$			1.5	V	$I_S=0.3\text{A}, V_{GS}=0\text{V}$
Gate-Source Breakdown Voltage	$BV_{GSO}$	$\pm 21.5$		$\pm 30$	V	$I_{GS}=\pm 1\text{mA}$ (Open Drain)
Recovered charge	$Q_r$		30		nC	$V_{GS}=0\text{V}, I_S=0.3\text{A}, V_R=25\text{V}, di/dt=-100\text{A}/\mu\text{S}$
<b>Dynamic Characteristics</b>						
Input capacitance	$C_{iss}$			40	pF	$V_{DS}=10\text{V}, V_{GS}=0\text{V}, f=1\text{MHz}$
Output capacitance	$C_{oss}$			30	pF	
Reverse transfer capacitance	$C_{rss}$			10	pF	
<b>Switching Characteristics</b>						
Turn-on delay time	$t_{d(on)}$		3		nS	$V_{DD}=50\text{V}, V_{GS}=10\text{V}, R_G=50\Omega, R_{GS}=50\Omega, R_L=250\Omega$
Turn-off delay time	$t_{d(off)}$		15		nS	
Reverse recovery time	$t_{rr}$		26		nS	$V_{GS}=0\text{V}, I_S=0.3\text{A}, V_R=25\text{V}, di/dt=-100\text{A}/\mu\text{S}$


Note:1. Pulse test ; Pulse width  $\leq 300\mu\text{s}$ , Duty cycle  $\leq 2\%$  .

MOSFET (N-CHANNEL)  
Typical Characteristics

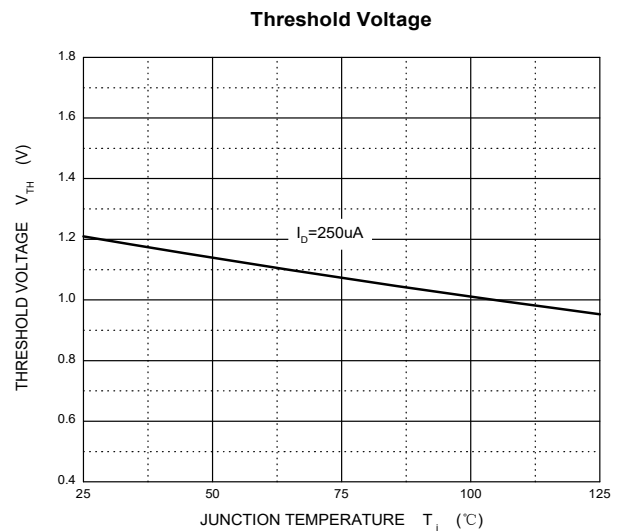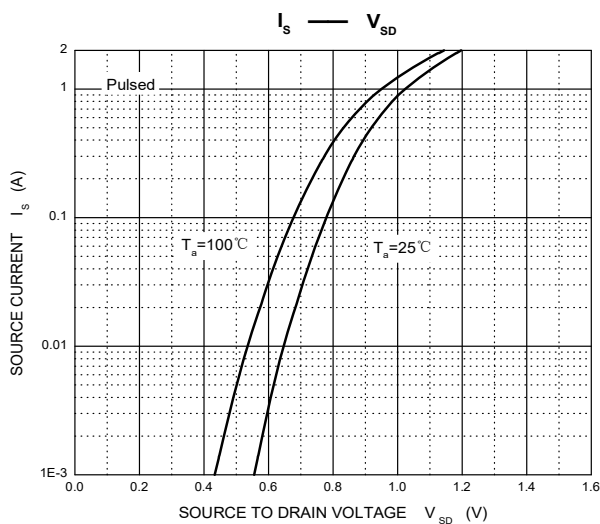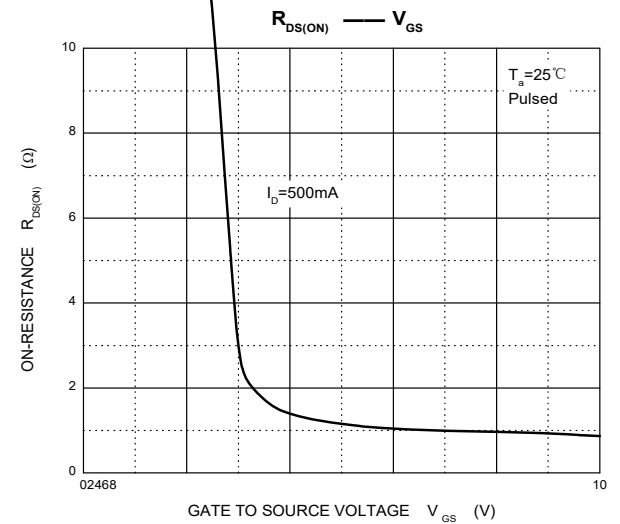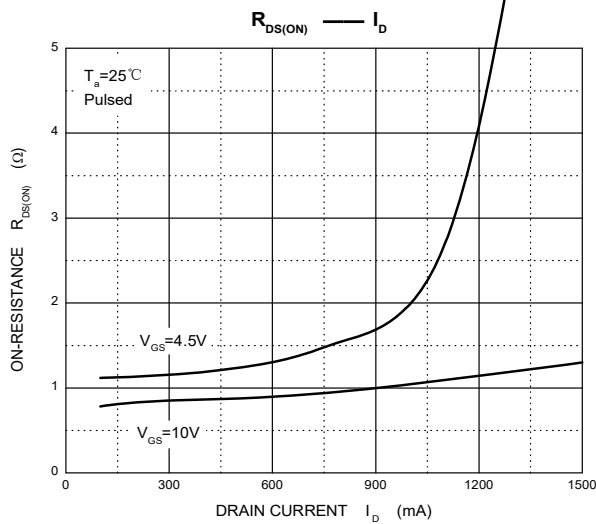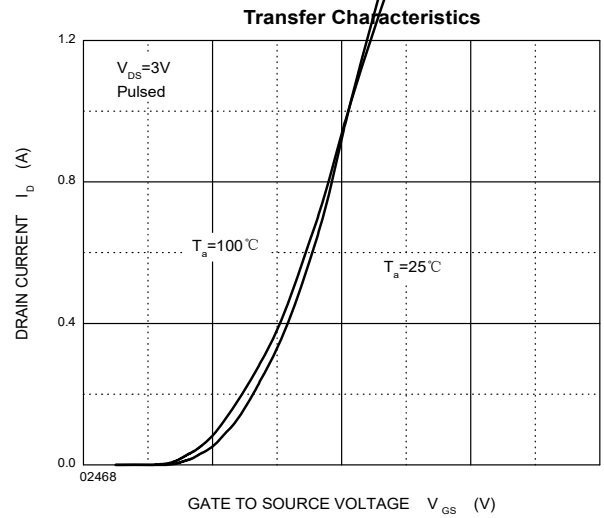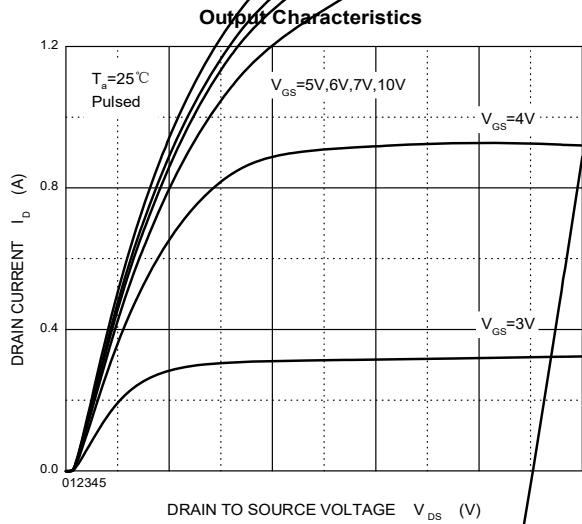


MOSFET (N-CHANNEL)

SOT-23 Package Outline Dimensions

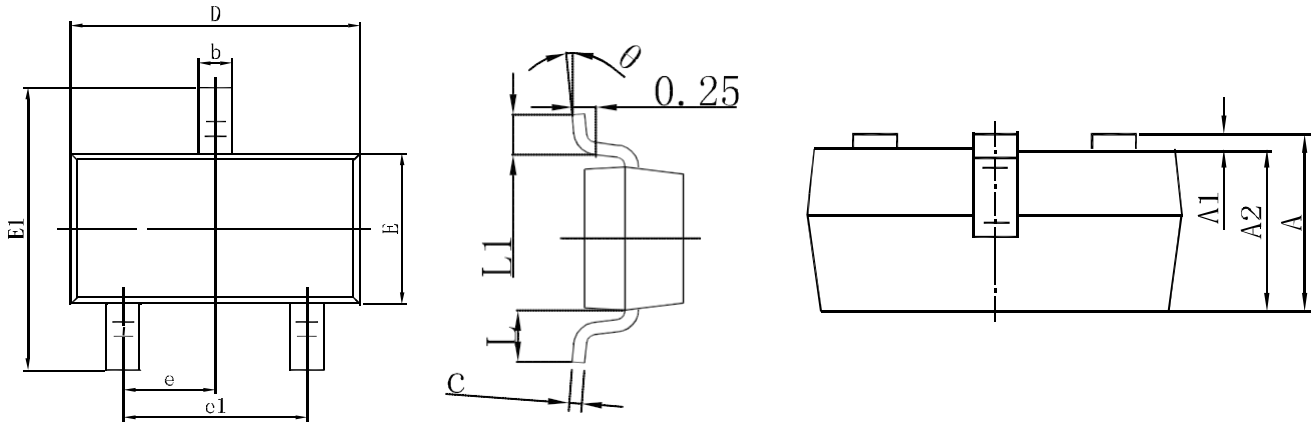

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

SOT-23 Suggested Pad Layout

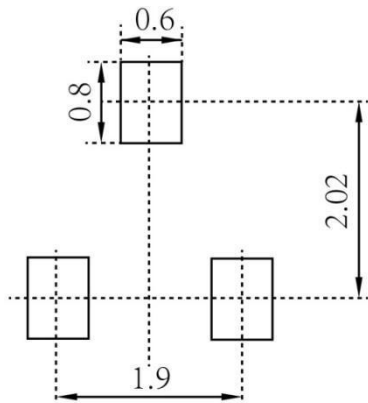


Note:

1. Controlling dimension: in millimeters
2. General tolerance: ±0.05mm
3. The pad layout is for reference purposes only

MOSFET (N-CHANNEL)


SOT-23 Tape and Reel

SOT-23 Embossed Carrier Tape

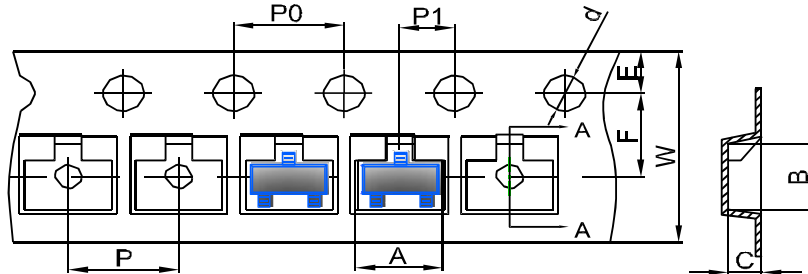


DIMENSIONS ARE IN MILLIMETER										
TYPE	A	B	C	d	E	F	P0	P	P1	W
SOT-23	3.15	2.77	1.22	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00
TOLERANCE	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1

SOT-23 Tape Leader and Trailer

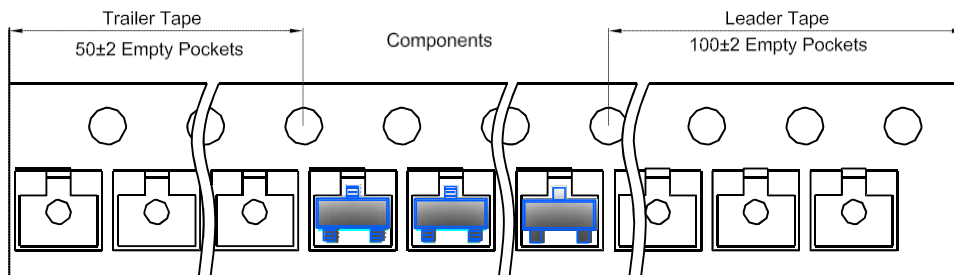

SOT-23 Reel

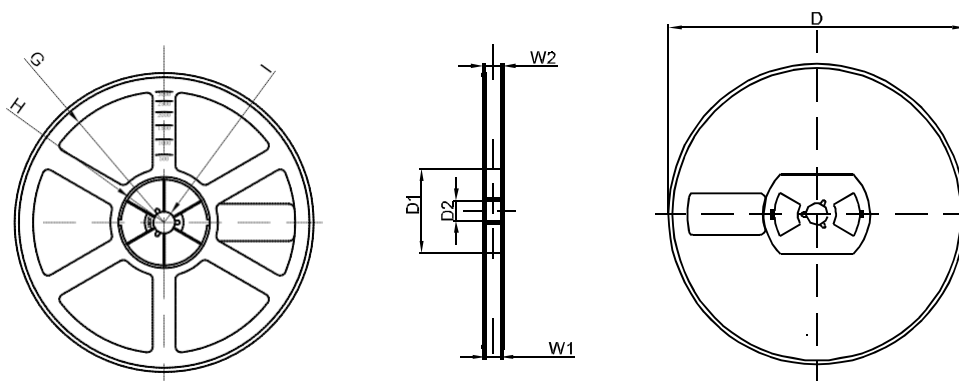

DIMENSIONS ARE IN MILLIMETER								
REEL OPTION	D	D1	D2	G	H	I	W1	W2
7" DIA	Ø178	54.40	13.00	R78	R25.60	R6.50	9.50	12.30
TOLERANCE	±2	±1	±1	±1	±1	±1	±1	±1