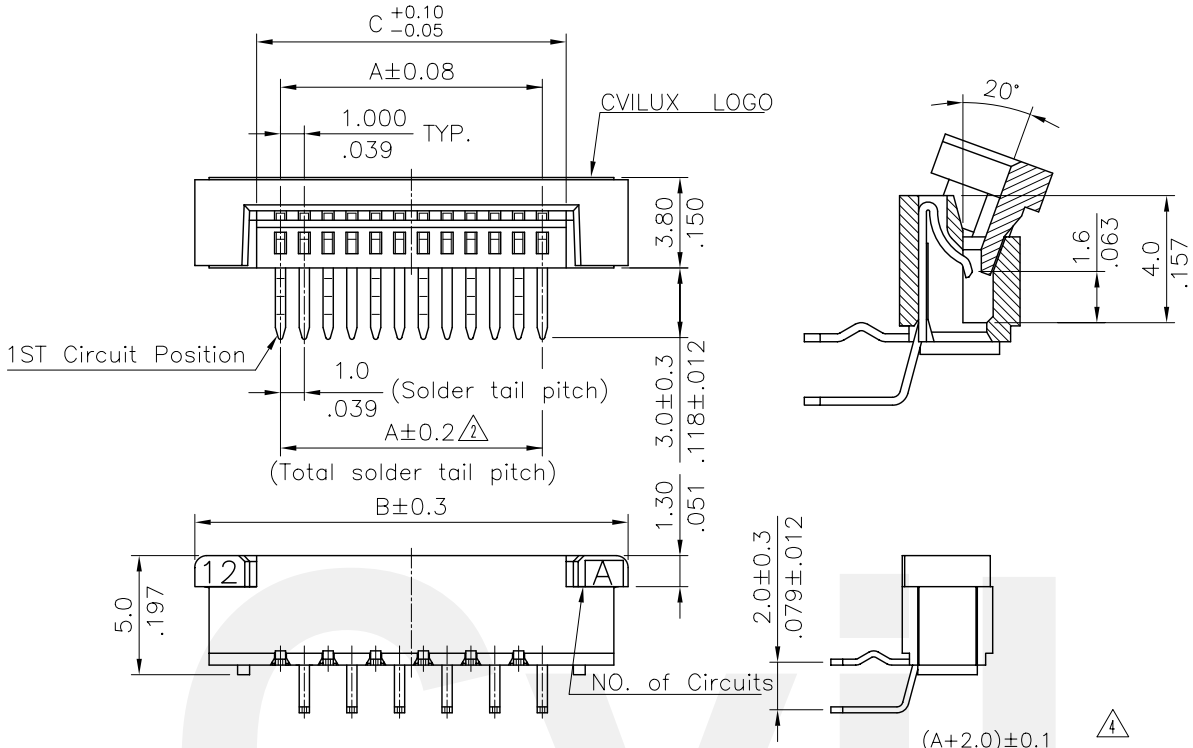

Material:

* Insulation: Nylon 6T UL 94V−0
  Color Nature
* Slider: Nylon 6T UL 94V−0, Color Brown
* Contact: Phosphor Bronze

Ordering Code

CF10	**	1	D	0	T	0
①	②	③	④	⑤	⑥	⑦

① Series No.
② No. of Circuits
③ Plating code:
  1= Tin plated over Nickel
④ Contact type : D= Down side contact
⑤ Insulation Color: 0= Nature
⑥ Packing : T= Tube Packaged
⑦ Other option: 0= Standard

A = 1.00 * No. of Spaces
B = A + 7.2
△1 C = A + 2.1
* Available in 4 through 32 circuits

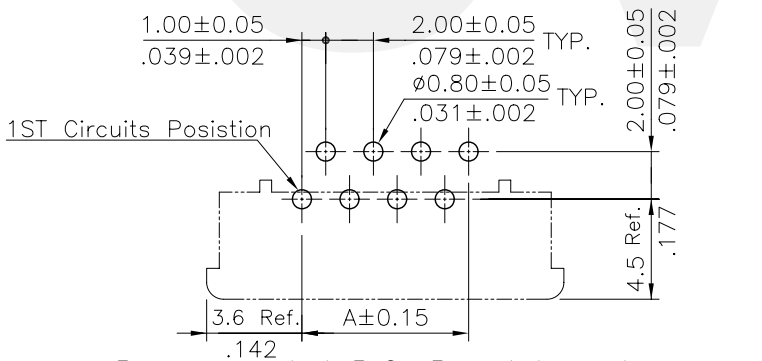

Recommended P.C. Board Layout

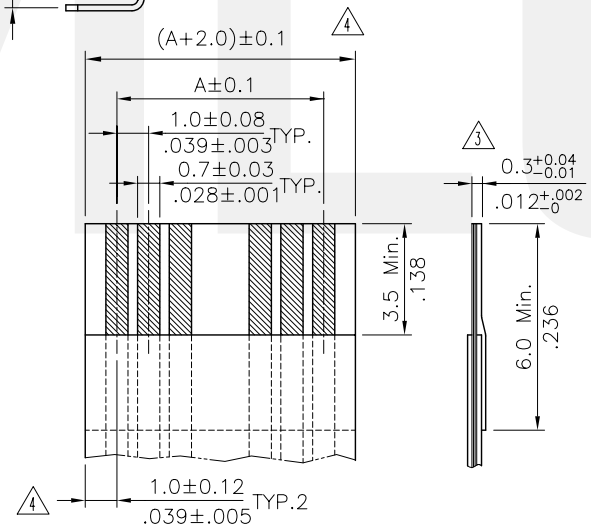

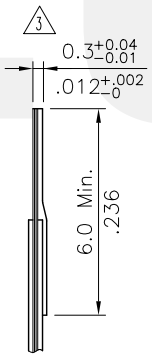

* ACCOMMODATED FFC

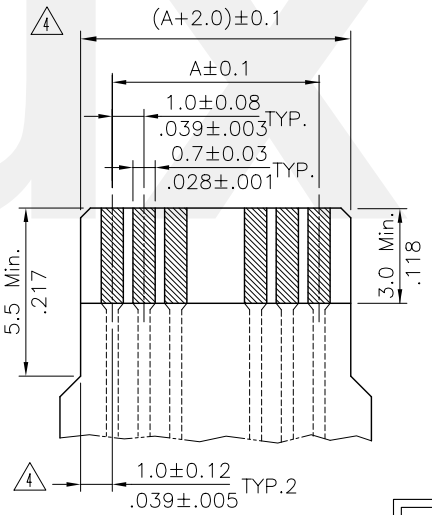

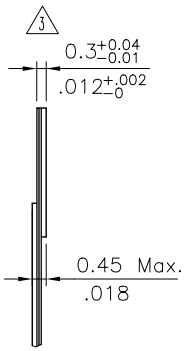

* ACCOMMODATED FPC

RoHS Compliant

SYM	NAME	DATE	REVISIONS
4	Bill	3/26-08'	ECR08027-0/ECN08145
3	Sandy	9/22-07'	ECN07381/ECR07065-1
2	Sun	10/27/05'	ECN05368
1	Sun	8/11/05'	ECN05268

CVILUX CORP. 2008.04.28 ISSUED

		DATE
DRAWN BY:	Bill	4/10 08'
ENGINEER:	CLARK	4/14 08'
CHECKED BY:	David	4/14 08'
APPROVED BY:	Alex	4/14 08'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X	± 0.15/.006	X.° ± 1°
.XX	± 0.10/.004	.X° ±
.XXX	± 0.05/.002	.XX° ±

TITLE: 1.00mm(.039") R/A DIP TYPE ZIF FFC/FPC CONNECTOR (DOWNSIDE CONTACT)

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CF1002SH	PART NO.	CF10**1D0T0
SCALE	3 / 1	SHEET 1 OF 1	