



CB50 Series 1.27mm(.050") Dual Row Female Headers

- Ultra Low profile
- Top and Bottom entry available
- High performance contact design
- Mates with CH51, CH52, CH53, and CH57 Connectors
- Lead Free soldering process available


RoHS Compliant

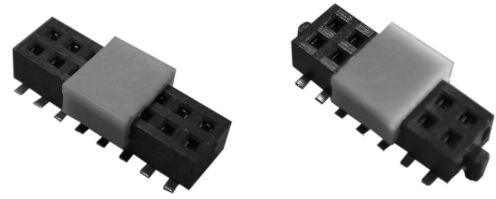



P/N CB50**20**0 Without Peg **PN2X17-1.27 SMD**

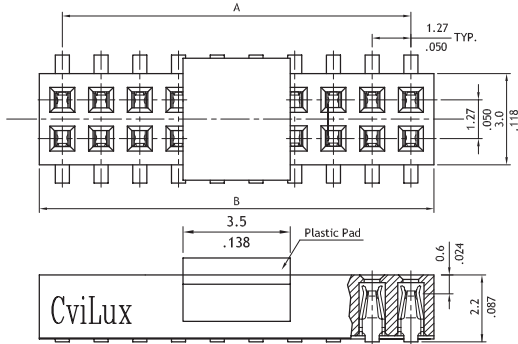



DIM. A = 1.27 X No. of Spaces
 DIM. B = DIM. A + 1.67
 DIM. C = DIM. A - 1.27

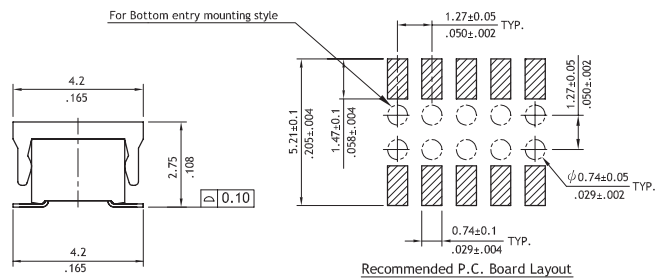

P/N CB50**2P**0 Pegs Type 1

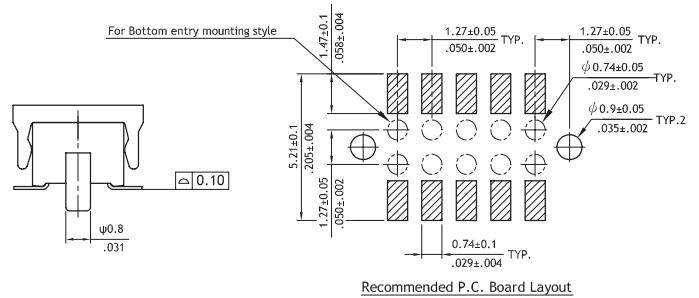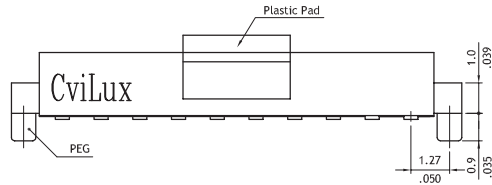

P/N CB50**2A**0 Pegs Type 2

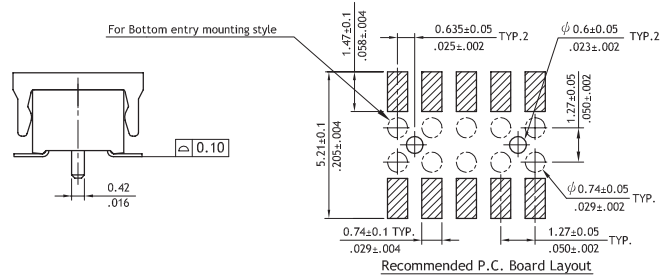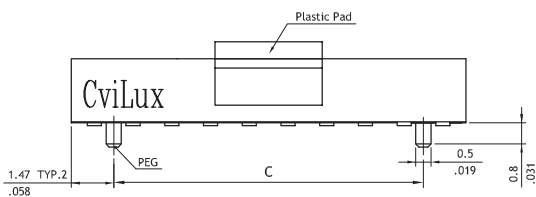

Ordering Code

1 2 3 4 5 6 7
CB50 40 2 0 0 T 0

1 Series No.
2 Circuits:
 06 to 100
 100= X1

3 Plating code:
 2= Gold flash over Nickel
 *Optional plating available but MOQ requested

4 Type:
 0= Without Peg , P= With Pegs Type1
 A= With Pegs Type2

5 0= Without Pick & Place Pad
 P= With Pick & Place Pad

6 Packing:
 T= Tube Packing , R= Tape & Reel

7 Other Options: 0= Standard
 *Special options consult manufacturer