
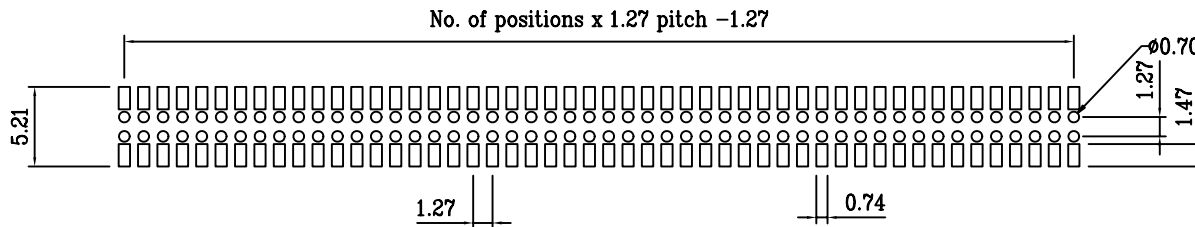



1 2 3 4 5 6 7 8 9 0


J
I
H
G
F
E
D
C
B
A

SPECIFICATIONS

- * Current Rating : 1 Amps
- * Insulator resistance: 5000 Megohms min.
- * Dielectric withstanding: AC 500 V
- * Operating Temperature: -40°-+105°C
- * Max Processing Temp: 230° for 30~60 seconds
(260° for 10 seconds)
- * Contact Material: Phosphor bronze
- * Housing: L.C.P (UL 94 V-0)

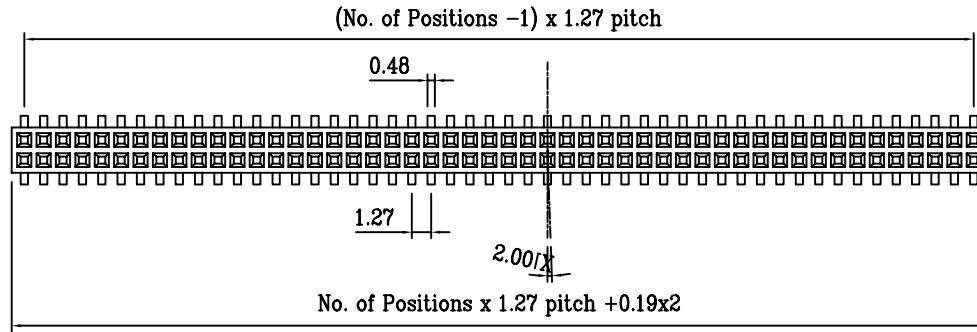

Recommended P.C.B. Layout

PART NO. GSM 60PIN SMD CON		CHECKED BY		TOLERANCES ARE .X ±0.15 .XX ±0.10 .XXX ±0.05 AWG	DESCRIP TION: Dual Row 1.27x1.27 SMD Female			
DWG NO.		DRAWING BY			AREA	REVISIONS	DATE	
FILE NO.		PROJECTION 						
UNIT / mm	SCALE 1:1							