
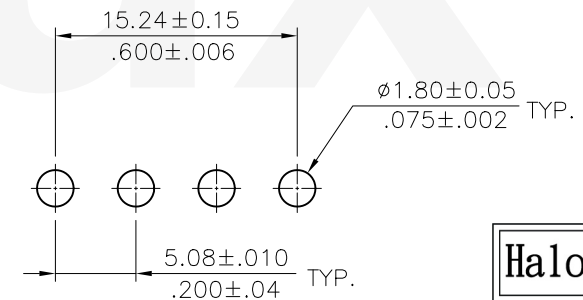
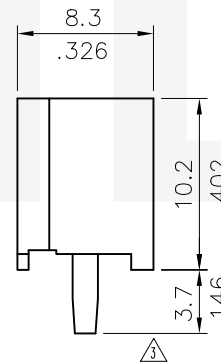
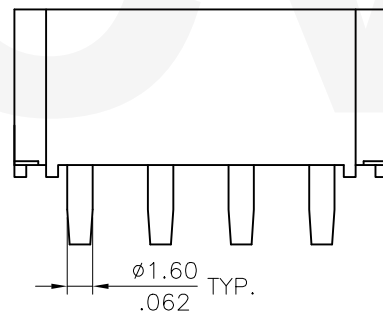


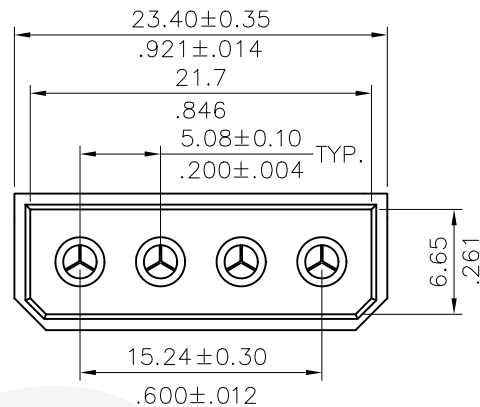

Material :

* Insulation : Nylon 66 UL 94V-2

* Contact : Pre-tinned Brass

Ordering Code:

CP33 04 P 1 V 00
① ② ③ ④ ⑤ ⑥

① Series No.

② No. of Circuite: 4 Circuits

③ Conctact type: P= Male

④ Contact plated:

1= Tin over 1.27μm (50μ") Nickel

⑤ Tail style: V= Straight

⑥ Option: 00=Color Nature (Standard)

10=Color Black

Halogen-Free

Tin-Lead Process

RoHS Compliant

Recommended P.C Board layout

CVILUX CORP

2016.02.18

ISSUED

4					DATE	UNIT: mm / inch	TITLE: 5.08MM(.200") STRAIGHT POWER HEADER CONNECTORS	 瀚荃股份有限公司 CviLux Corporation			
3	Karen	2/01-16'	ECNT116018/ECRT116003	DRAWN BY:	Karen	2/2-16'					
2	Jim	12/20/06	ECR06113-0/ECN06475	ENGINEER:	Sun	2/3-16'		DRAWING NO.	CP3302SF	PART NO.	CP3304P1V**
1	SUN	4/30/04'	ECN04150	CHECKED BY:	Eisley	2/4-16'		SCALE	2 / 1	SHEET	1 OF 1
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	2/4-16'					

TOLERANCE
UNLESS OTHERWISE SPECIFIED

.X ± 0.25 / .010 X' ± 3"

.XX ± 0.15 / .006 .X' ±

.XXX ± 0.08 ± .003 .XX ±

MATERIAL:

FINISH: