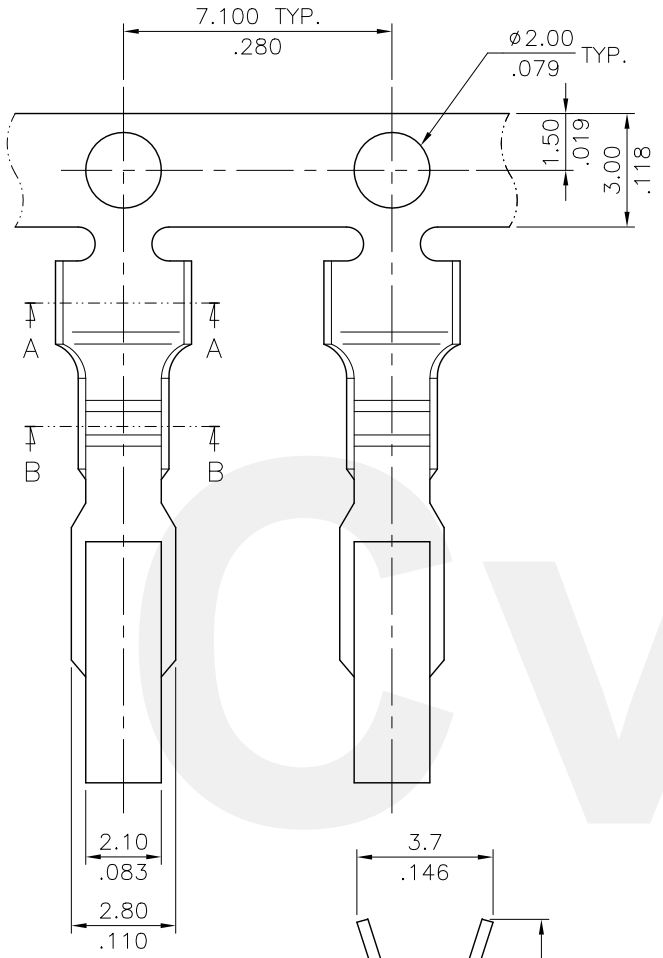



SEC: A–A

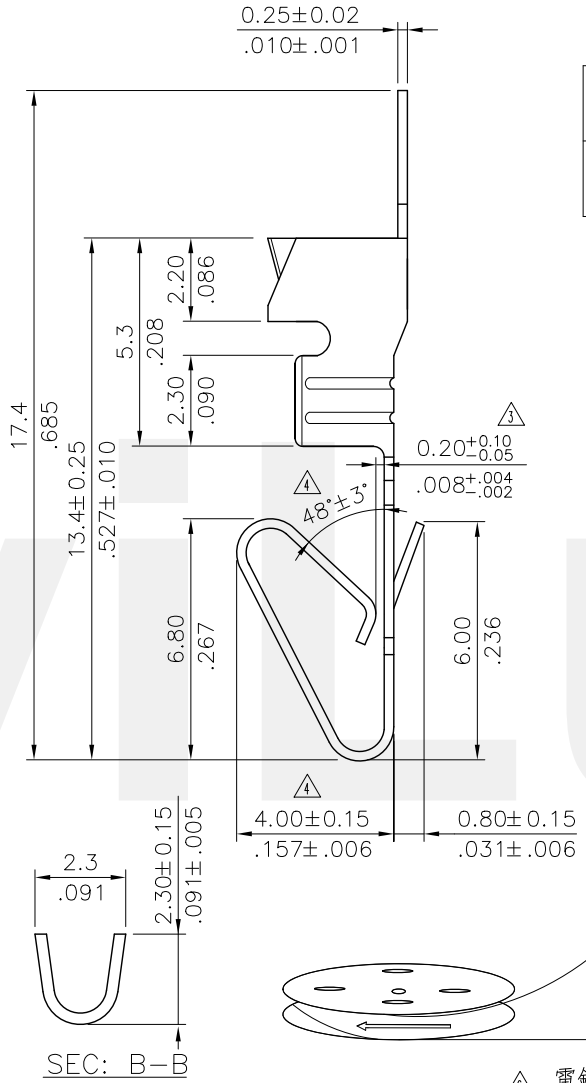

SEC: B–B

Wire Range	Insulation Diameter	Reel Q'ty
AWG #18~#24	2.10 (.083) MAX.	5,000 PCS.

Ordering Code:

CI51 / ① T03 / ② 1 / ③ * / ④ E / ⑤ 0 / ⑥

① Series No.
② Type: T03= AWG #18~ #24
③ Plating: 1= 2.03μm(80μ") Min. Tin Plated over 0.76μm(30μ") Nickel
④ Material: B=Brass
P= Phosphor Bronze
⑤ Plating method: E= Pre-tinned
⑥ Option: 0= Standard

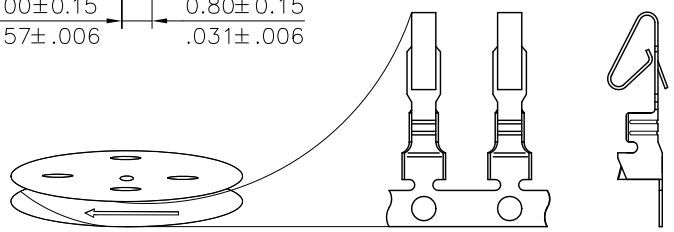

⑥ 電鍍後捲料方向

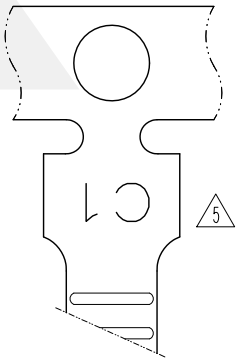

BACK VIEW

SYM	NAME	DATE	REVISIONS
6	Enya	9/18-12'	ECN12232-0/ECR12066-0
5	Erin	5/7-12'	ECR12021-0/ECN12074-0
4	Karen	6/11-11'	ECN11119/ECR10185-0
3	Sun	12/06-06'	ECN06449, ECR06069-1

CVILUX CORP 2012.10.11 ISSUED

		DATE
DRAWN BY:	Enya	9/18-12'
ENGINEER:	Eisley	9/18-12'
CHECKED BY:	Eisley	9/18-12'
APPROVED BY:	David	9/18-12'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ± 0.20 / .008	X.° ± 1°
.XX ± 0.10 / .004	.X° ±
.XXX ± 0.05 / .002	.XX° ±

TITLE: 2.00MM(.079") CRIMP TERMINAL

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CI5105SJ	PART NO.	CI51T031*E0
SCALE	5 / 1	SHEET 1 OF 1	