
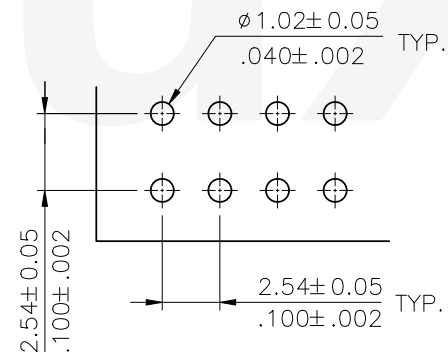


A = 2.54 \* No. of Spaces

B = A + 7.34

\* Available circuits: 6,8,10,12,14,16,20,24,26, 30,34,40,50,60 and 64

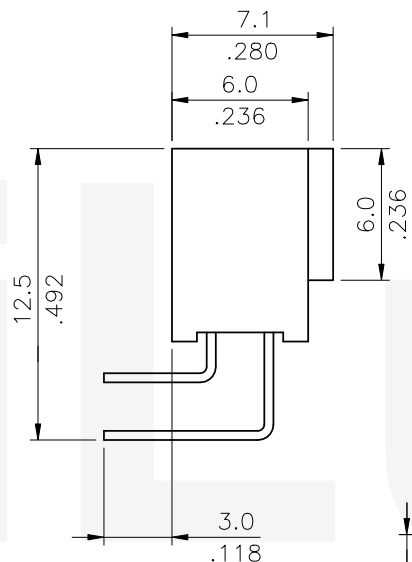

Note:

- \* Insulation: Glass filled polyester UL 94V-0
- \* Contact: Phosphor Bronze
- \* For Tin-Lead wave flow process

Ordering Code:

CB94 \*\* 2 H 1 00  
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② NO. of Circuits:
- ③ Plating code:  
2= Gold flash plated over 1.27μm(50μ") Nickel
- ④ Tail Style: H= Right angle
- ⑤ Color: 1= Black
- ⑥ Other options: 00= Standard

Recommended P.C. Board Layout

Tin-Lead Process

RoHS Compliant

④						DATE	UNIT: mm / inch	TITLE: 2.54MM(.100") DUAL ROW SIDE ENTRY BOARD MOUNT CONNECTOR	 瀚荃股份有限公司 CviLux Corporation			
③	SUN	9/17-14'	ECNT114197		DRAWN BY:	Sun	9/17 14'	TOLERANCE UNLESS OTHERWISE SPECIFIED		MATERIAL:		
②	Jim	8/29/06'	ECN06311		ENGINEER:	Eisley	9/18 14'	.X ± 0.30 / .012    .X' ± 1"	FINISH:			
①	SUN	7/07/05'	ECR05063-0/ECN05236		CHECKED BY:	Eisley	9/18 14'	.XX ± 0.20 / .008    .X ±				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	David	9/18 14'	.XXX ± 0.10 / .004    .XX ±	DRAWING NO.	CB9402SE	PART NO.	CB94**2H100	
									SCALE	3 / 1	SHEET	1 OF 1