

Material:

* Insulation: Nylon 66 UL 94V-2, Color Ivory

* Contact: Brass, round pins

Ordering Code:

CI25 ** P 1 H 00
① ② ③ ④ ⑤ ⑥

① Series No.

② No. of Circuits



③ Contact type: P= Pin header

④ Plating option:


1= 3.05 μ m(120 μ "") Tin
over 0.76 μ m(30 μ "") Nickel

⑤ Tail Style: H= Right Angle

⑥ Option: 00= Standard

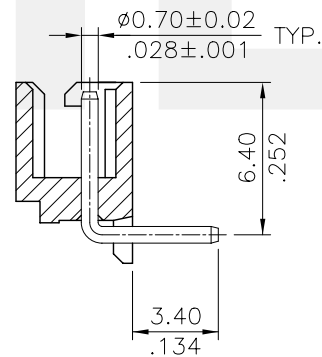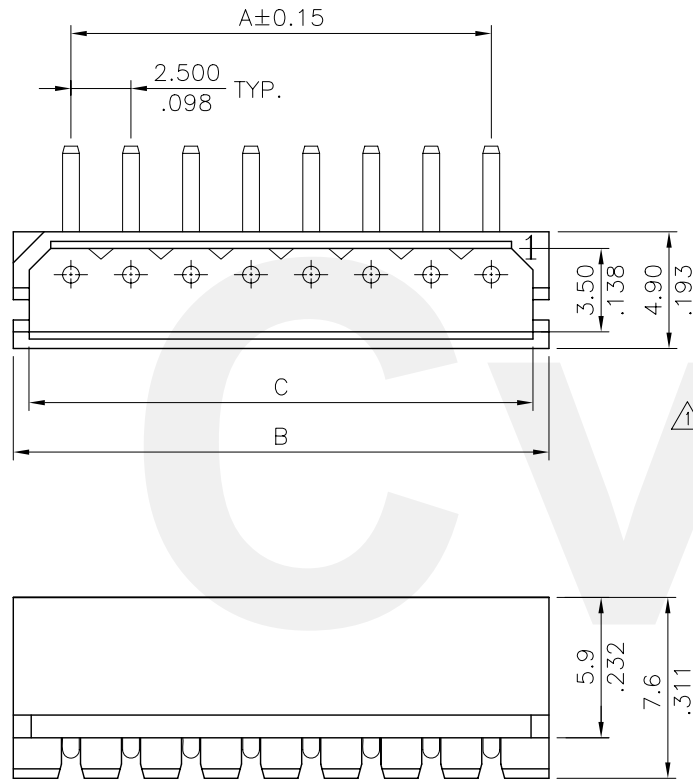

Circuits	Dimension		
	A	B	C
2	2.50(.098)	7.5(.295)	6.00(.236)
3	5.00(.197)	10.0(.394)	8.50(.335)
4	7.50(.295)	12.5(.492)	11.00(.433)
5	10.00(.394)	15.0(.591)	13.50(.531)
6	12.50(.492)	17.5(.689)	16.00(.630)
7	15.00(.591)	20.0(.787)	18.50(.728)
8	17.50(.689)	22.5(.886)	21.00(.827)
9	20.00(.787)	25.0(.984)	23.50(.925)
10	22.50(.886)	27.6(1.087)	26.00(1.024)
11	25.00(.984)	30.1(1.185)	28.50(1.122)
12	27.50(1.083)	32.6(1.283)	31.00(1.220)
13	30.00(1.181)	35.1(1.382)	33.50(1.319)
14	32.50(1.280)	37.6(1.480)	36.00(1.417)
15	35.00(1.378)	40.1(1.579)	38.50(1.516)

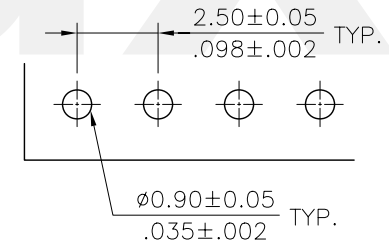

Recommended P.C. Board Layout

Halogen-Free

Tin-Lead Process

RoHS Compliant

④				CIVILUX CORP 2007.08.20 ISSUED		DATE	UNIT: mm / inch		TITLE: 2.50MM(.098") PIGHT ANGLE HEADERS	 瀚荃股份有限公司 CviLux Corporation				
③					DRAWN BY:	Bill	8/15-07'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
②					ENGINEER:	Eisley	8/15-07'	.X ± 0.30/.012	X' ± 1"		MATERIAL:			
①	Bill	8/10'07	ECR07093-0/ECN07309		CHECKED BY:	David	8/15-07'	.XX ± 0.20/.010	.X' ±					
SYM	NAME	DATE	REVISIONS		APPROVED BY:	Alex	8/15-07'	.XXX ± 0.10/0.04	.XX' ±	FINISH:	DRAWING NO.	CI2502SG	PART NO.	CI25**P1H00
											SCALE	3 / 1	SHEET	1 OF 1