

PIN	Tolerance
04~40	±0.20
42~80	±0.35

A = 2.54 \* No. of Spaces

B = A + 3.04

\* Available in 4 through 80 circuits


Material:

- △△ \* Insulation: PBT With 30% G.F. UL 94V-0
- \* Contact: Brass

Ordering Code:

CB91 \*\* 2 H 1 00  
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② NO. of Circuits:
- ③ Plating code:  
2 = Gold flash plated over 1.27μm(50μ") Nickel
- ④ Tail Style: H = Right angle
- ⑤ Color: 1 = Black
- ⑥ Other options: 00 = Standard

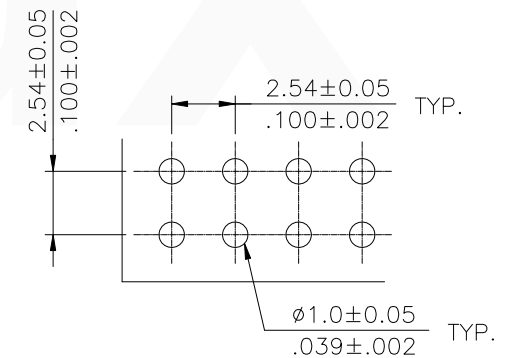

Recommended P.C. Board Layout

RoHS Compliant

SYM	NAME	DATE	REVISIONS	APPROVED BY:	DATE	UNIT: mm / inch	TITLE: 2.54MM(.100") DUAL ROW BOARD MOUNT CONNECTOR	CviLux Corporation					
△6	Karen	9/23-19'	ECNT119300/ECRS119004	<div style="border: 2px solid red; border-radius: 50%; padding: 5px; display: inline-block;"> <b>CVILUX</b>            2019.11.07  <b>ISSUED</b> </div>	DRAWN BY:	Karen	11/1-19'	TOLERANCE UNLESS OTHERWISE SPECIFIED .X ± 0.25/.010    X.' ± 3" .XX ± 0.20/.008    .X" ± .XXX ± 0.10/.004    .XX" ±	<div style="display: flex; align-items: center;"> <div> <p>瀚荃股份有限公司</p> <p>CviLux Corporation</p> </div> </div>				
△5	Enya	1/25-13'	ECN13024-0/ECR12113-0		ENGINEER:	Sun	11/1-19'						MATERIAL:
△4	Enya	10/22-12'	ECN12256-0/ECR12081-0		CHECKED BY:	Eisley	11/5-19'						FINISH:
△3	Sun	1/22-07'	ECN07036		APPROVED BY:	Eisley	11/5-19'						DRAWING NO.
							SCALE	3 / 1	SHEET	1 OF 1			