





Ordering Code:

CBC1 ** * D 1 0 0
 ① ② ③ ④ ⑤ ⑥ ⑦

△ Material:

- * Insulator: LCP With 35% GF/mineral. or Nylon 9T UL 94V-0
- * Contact: Phosphor Bronze

- ① Series No.
- △ ② No. of Contact:
 With Key: 10,20,30~60
 Without Key: 6~60
- ③ Plating code:
 2= Gold flash plated over 1.27μm(50μ") Nickel
 3= 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
 4= 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
- ④ Tail Style: D = DIP Type
- ⑤ Insulator Color: 1 = Black
- ⑥ Other option:
 0= Without Key and Peg
 1= With Key and Peg
 2= Without Key , With Peg
- ⑦ Material option:
 0= LCP With 35% GF/mineral.
 M= Nylon 9T

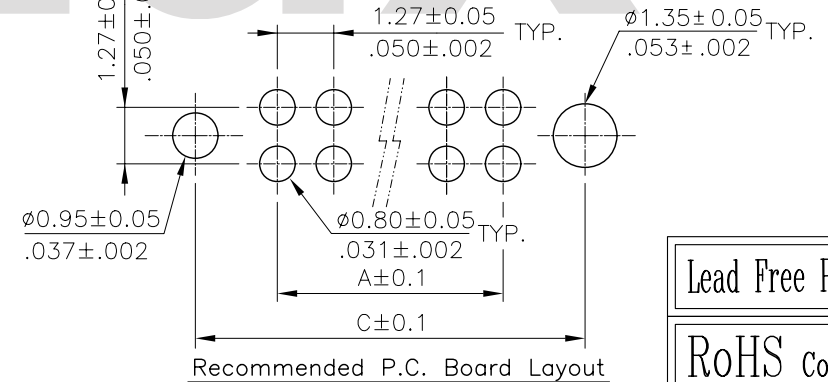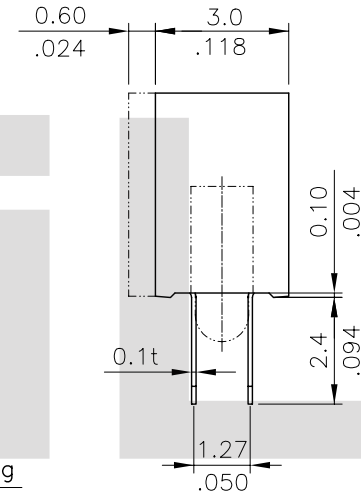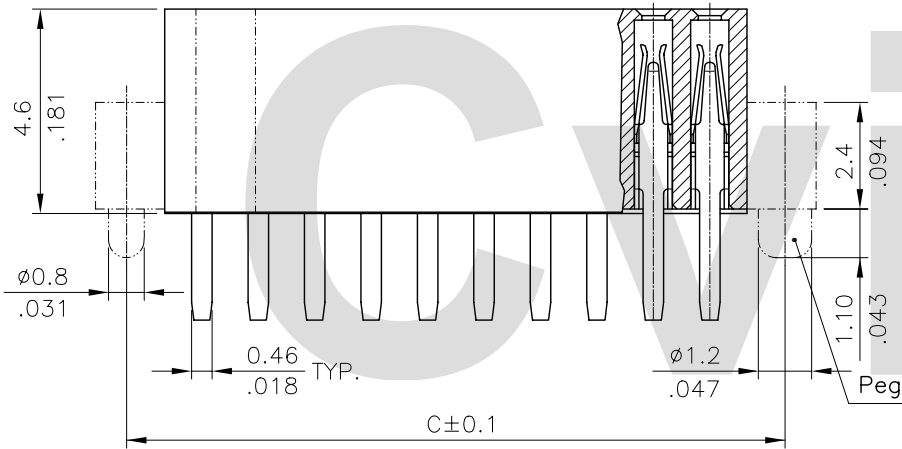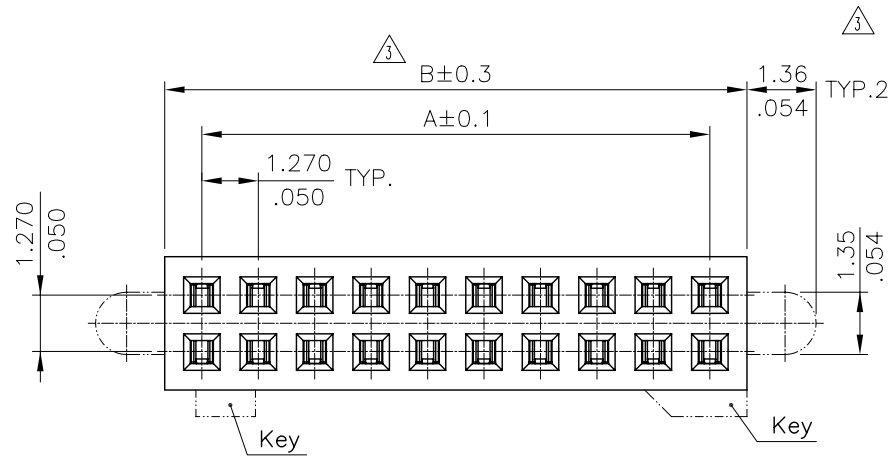


DIM. A = 1.27 X No. of Spaces
 DIM. B = DIM. A + 1.67
 DIM. C = DIM. A + 3.05

△ * Available in 6 through 60 Circuits

Lead Free Process

RoHS Compliant

△4	Sun	11/18-09'	ECN09531/ECR09117-1		DATE	UNIT: mm / inch	TITLE: 1.27X1.27mm DIP TYPE SOCKET	 瀚荃股份有限公司 CviLux Corporation
△3	Sandy	5/3-07'	ECN07156/ECR07018-1	DRAWN BY: Sun	11/13-09'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
△2	Sun	10/18/04	ECR04056-1/ECN04394	ENGINEER: Easley	11/16-09'	.X ± 0.25/.010 X' ± 1'	FINISH:	DRAWING NO. CBC106SE
△1	Sun	4/08/04'	ECN04141	CHECKED BY: Easley	11/16-09'	.XX ± 0.15/.006 .X' ±		PART NO. CBC1***D1**
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	11/16-09'	.XXX ± 0.08/.003 .XX' ±	SCALE 7 / 1	SHEET 1 OF 1

CIVILUX CORP
 2009.12.01
 ISSUED