


EI42/14.8ST Transformers for Printed Boards

For power 6VA.

Designed for the electronics.

Connection method - with pins to printed boards.

- Type - EI/ST
- Input voltage - from 24V to 400V
- Output voltage - from 6V to 24V
- Output voltage - from 2x6V to 2x24V
- Frequency - 50-60HZ
- Isolation class - B/130°C
- Ambient temperature - +70°C
- Protection class - II
- Dielectric strength - 4200V
- Short-circuit protection - (non) proof
- Core type - EI DIN 41302
- IEC Norm - EN 61558

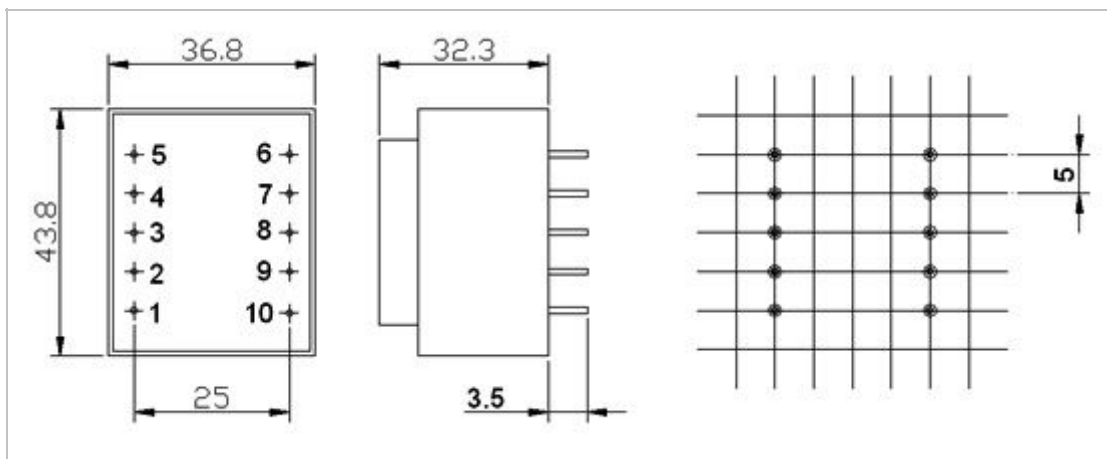

Part. №	Power, VA	Primary voltage, V	Primary № pins	Secondary voltage loaded, V	Secondary current, mA	Secondary № pins	Secondary voltage no load, V
BULTRAF6VA/9V	6.0	230	1-5	1x9	667	7-9	1x11.3
BULTRAF6VA/12V	6.0	230	1-5	1x12	500	7-9	1x15.2
BULTRAF6VA/15V	6.0	230	1-5	1x15	400	7-9	1x19