


Material:
 ②* Insulator: LCP With 40% G.F.
 UL 94V-0 Color Black
 * Contact: Phosphor Bronze
 ③* Pick & Place Pad:
 Nylon 6T With 30% GF.
 UL 94V-0 Color Nature

Ordering Code:

CB01 ** * M 1 00 - 2 P
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② No. of Contact: 04 to 50
- ③ Plating code:
 2= Gold flash plated over 1.27μm(50μ") Nickel
 3= 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
 4= 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
- ④ Tail Style: M = SMT Type
- ⑤ Insulator Color: 1 = Black
- ⑥ Other option:
- ⑦ Pin Size for mate Pin header:
 2=0.4 Square Pin
- ⑧ 0=Without Pick & Place Pad
 P=With Pick & Place Pad

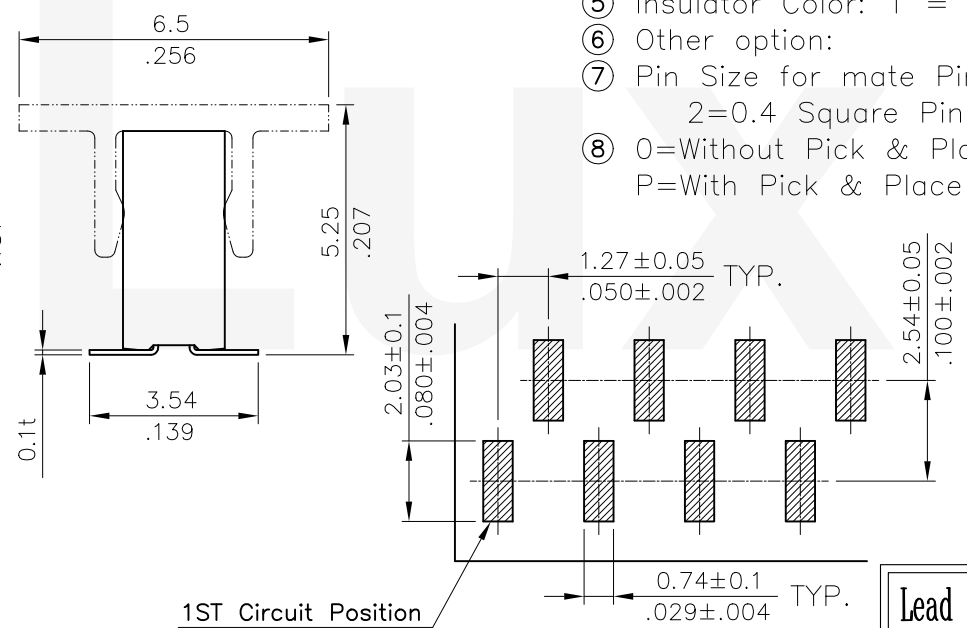


DIM. A = 1.27 X No. of Spaces
 DIM. B = DIM. A + 1.67
 * Available in 4 through 50 Circuits

Recommended P.C. Board Layout

Lead Free Process
 RoHS Compliant

CVILUX CORP
 2016.04.07
 ISSUED

④	Sandy	3/29-16'	ECNT116051/ECRB116009	2016.04.07	DATE	UNIT: mm / inch	TITLE: PITCH 1.27mm(.050") SMT TYPE SOCKET	 瀚荃股份有限公司 CviLux Corporation
③	Sandy	2/19-09'	ECN09066/ECR08097-0	DRAWN BY: Sandy	3/29-16'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
②	Sandy	4/30-07'	ECN07156/ECR07018-1	ENGINEER: Sun	3/31-16'	.X ± 0.25/.010 X' ± 1"	FINISH:	
①	SUN	10/15/04'	ECR04056-1-ECN04394	CHECKED BY: Eisley	3/31-16'	.XX ± 0.15/.006 .X' ±	DRAWING NO. CB0102SE PART NO. CB01***M100-2*	
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	3/31-16'	.XXX ± 0.08/.003 .XX' ±	SCALE 6 / 1 SHEET 1 OF 1	