




Querschnitt  
Cross section

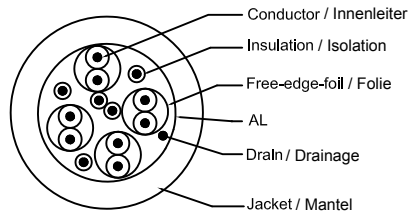

Zeichnung  
Drawing

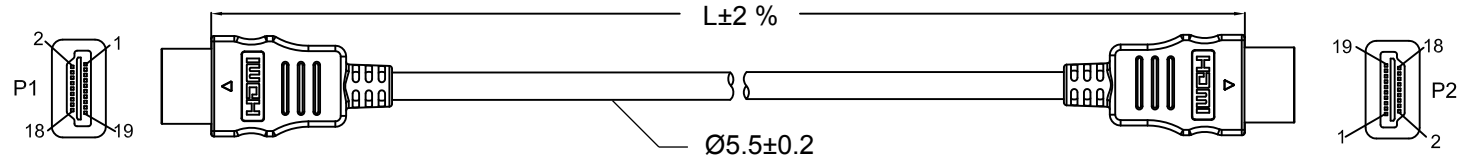

Belegung  
Wiring

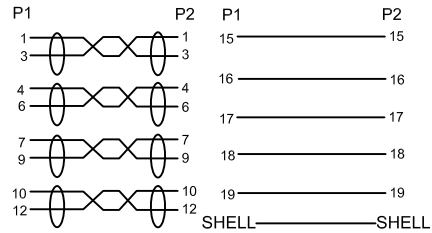

Nr. / No.	Länge / Length (m) - Verpackung / Packing
24820	2.00 - SB
24823	7.00 - SB
51818	1.00
51819	1.50
51820	2.00
51821	3.00
51822	5.00
51823	7.00
51827	2.50
51859	1.80
61818	1.00
61819	1.50 - SB
61821	3.00 - SB
61822	5.00 - SB

HiSpeed HDMI-Kabel

- Anschlüsse: HDMI-Stecker > HDMI-Stecker
- Kontakte: 19 PIN; vergoldet
- Standards: HDTV bis 2160p (4K), 3D bis 1080p (Full HD)
- Kabel: UL AWM STYLE 20276 80°C 30V VW-1 30 AWG CCS
- Isolationswiderstand: DC 300 V 10 MOhm
- Kontaktwiderstand: 5 Ohm
- Konformität: RoHS

HiSpeed HDMI cable

- Connectors: HDMI plug > HDMI plug
- Contacts: 19 PIN; gold-plated
- Standards: HDTV up to 2160p (4K), 3D up to 1080p (Full HD)
- Cable: UL AWM STYLE 20276 80°C 30V VW-1 30 AWG CCS
- Insulation resistance: DC 300 V 10 MOhm
- Contact resistance: 5 Ohm
- Conformity: RoHS

Änderungen

Datum	Name	gez.:	Datum	Name	Bezeichnung	Blatt
		gez.:	21.01.2016	tf	HDMI™ HiSpeed Kabel G	
		gepr.:	21.01.2016	tf		
		Norm:			Zeichnungs-Nr.:	von
Änderungen vorbehalten / Subject to change						

