

ADELIA-50-S

~15° spot beam

SPECIFICATION:

Dimensions Ø 49.8
Height 18 mm
Fastening snaps
ROHS compliant yes ①



MATERIALS:

ComponentTypeMaterialColourFinishCoatingADELIA-50-SReflectorAluminiummetalglossAnodized

ORDERING INFORMATION:

» Box size: 370 x 300 x 310 mm


Component Qty in box MOQ MPQ Box weight (kg)

C18294_ADELIA-50-S 2000 100 100 11.2

Last update: 20/02/2025 Subject to change without prior notice Published: 23/06/2022



PRODUCT DATASHEET C18294_ADELIA-50-S

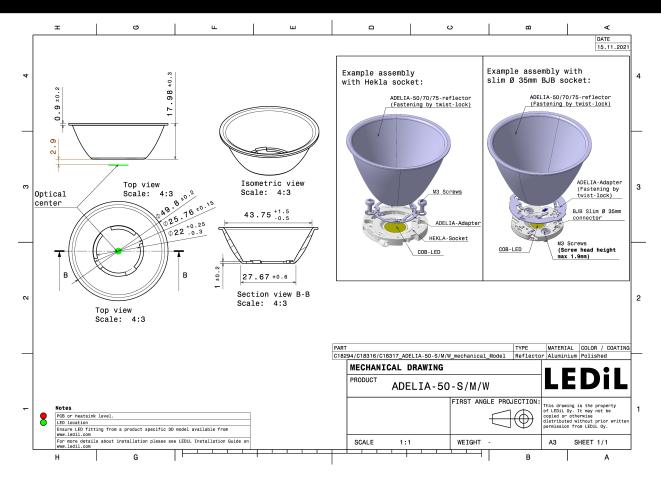

See also our general installation guide: www.ledil.com/installation_guide






LED V10 Gen 8-9 16.0° / 40.0° FWHM / FWTM 91 % Efficiency Peak intensity 4.2 cd/lm LEDs/each optic 1 Light colour/type White Required components:

C18431_ADELIA-ADAPTER-B

BJB: 47.360.1020




Light distribution files

bridgelux

V10 Gen 8-9 LED FWHM / FWTM 16.0° / 40.0° Efficiency 92 % Peak intensity 4.5 cd/lm LEDs/each optic 1 Light colour/type White Required components:

C18432_ADELIA-ADAPTER-C

Bender Wirth: 634b Hekla



Light distribution files

bridgelux

V18 Gen 8-9 FWHM / FWTM 35.0° / 92.0° Efficiency 83 % Peak intensity 1.3 cd/lm LEDs/each optic Light colour/type White

Required components:

C18432_ADELIA-ADAPTER-C

Bender Wirth: 639b Hekla XL

Light distribution files





LED V6 HD Gen 7 FWHM / FWTM 14.1° / 26.1 + 25.1°

Efficiency 96 %
Peak intensity 6.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

F17435_HEKLA-G2-C C18432_ADELIA-ADAPTER-C


Light distribution files

CITIZEN

LED CLL02x/CLU02x (LES10)

FWHM / FWTM 18.0° / 44.0°
Efficiency 91 %
Peak intensity 3.9 cd/lm
LEDs/each optic 1
Light colour/type White

Required components: F17435_HEKLA-G2-C C18432_ADELIA-ADAPTER-C



Light distribution files


CITIZEN

LED CLU700/701/702/703

FWHM / FWTM 12.0° / 22.0°
Efficiency 91 %
Peak intensity 7.8 cd/lm
LEDs/each optic 1
Light colour/type White

Required components: F17435_HEKLA-G2-C

C18432_ADELIA-ADAPTER-C



Light distribution files



CREE +

LED CHA0410
FWHM / FWTM 10.0° / 18.0°
Efficiency 91 %
Peak intensity 11 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F17435_HEKLA-G2-C


C18432_ADELIA-ADAPTER-C

Light distribution files



LED CHA0612
FWHM / FWTM 12.0° / 22.0°
Efficiency 91 %
Peak intensity 7.6 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

F17435_HEKLA-G2-C C18432_ADELIA-ADAPTER-C



Light distribution files

CREE -

LED CMB15xx
FWHM / FWTM 16.0° / 40.0°
Efficiency 90 %
Peak intensity 4.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

F17436_HEKLA-G2-D C18432_ADELIA-ADAPTER-C 968* 968* 1000 668* 1000 668*

Light distribution files






LED CMU10xx FWHM / FWTM 16.0° / 42.0° Efficiency 91 % Peak intensity 4.1 cd/lm LEDs/each optic 1 Light colour/type White

Required components:

C18431_ADELIA-ADAPTER-B

BJB: 47.360.1020




Light distribution files

CREE \$

LFD CMU15xx FWHM / FWTM 25.0° / 84.0° 89 % Efficiency Peak intensity 2.1 cd/lm LEDs/each optic 1 Light colour/type White Required components:

F17438_HEKLA-G2-I

C18432_ADELIA-ADAPTER-C




Light distribution files

CREE \$

CMU15xx LED FWHM / FWTM 26.0° / 84.0° Efficiency 90 % Peak intensity 2 cd/lm LEDs/each optic White Light colour/type Required components:

F17438_HEKLA-G2-I

C18432_ADELIA-ADAPTER-C



Light distribution files




SAMSUNG

LC003D / LC006D / LC009D / LC013D LFD

FWHM / FWTM 18.1° / 44.2° Efficiency 92 % Peak intensity 3.8 cd/lm LEDs/each optic 1 Light colour/type White

Required components: F17435_HEKLA-G2-C

C18432_ADELIA-ADAPTER-C



Light distribution files

SAMSUNG


LC016D / LC019D / LC026D / LC033D LFD

FWHM / FWTM 29.2 + 30.2° / 86.5°

Efficiency 90 % Peak intensity 1.8 cd/lm LEDs/each optic 1 Light colour/type White

Required components: F17438_HEKLA-G2-I

C18432_ADELIA-ADAPTER-C



Light distribution files

Published: 23/06/2022



PRODUCT DATASHEET C18294 ADELIA-50-S

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 7 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Poznan, Poland Hong Kong, China

Distribution Partners

www.ledil.com/ where_to_buy